

Shower Filter

15 Stage Filtration

APPLICATIONS

Residential, Commercial & Motorhome

GENERAL INFO

The High Output Shower Filter is designed for the simple and effective removal/reduction of Chlorine from your shower water. The internal cartridge uses a 15 Stage Filtration process and provide many benefits.

Chlorine is universally used to chemically disinfect water. Municipal water suppliers use chlorine and its derivatives to effectively destroy micro-organisms in drinking water. Chlorine is also a familiar bleaching agent, most homes use a chlorine based bleach. To be an effective bleach it is necessary that a substance be able to attack organic matter – chlorine does this.

Chlorine can bond with the proteins in the body and make hair dry, and can cause sensitive dry skin to flake and itch. When showering, the heat of the water causes your pores to expand thus absorbing chlorine instantly. Therefore it makes sense to remove the chlorine from your shower as well as from your drinking water.

FEATURES | BENEFITS

- ◆ Chrome Housing
- ◆ No reduction in water pressure
- ◆ Cartridge Life Rating: 1 Year
- ◆ This high performance 15 Stage Shower Filter combines easy operation and maintenance with the ultimate in structural integrity and over-all reliability



WAT FILT ASF-HO



WAT FILT ASFC-HO




NSF/ANSI 61

Shower Filter

15 Stage Filtration

SIZING OF FILTER & REPLACEMENT CARTRIDGE

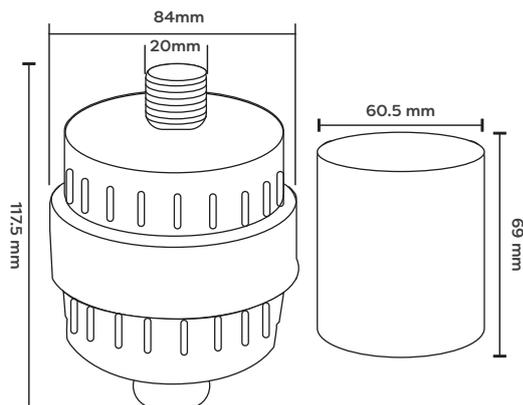

INSTALLATION

1. Unscrew existing shower head from shower arm.
2. Screw elbow adapter onto shower arm (provided).
3. Screw filter housing (Back) onto shower arm/elbow adapter.
4. Screw shower head onto filter housing (Front)
5. Do not use with a shut-off valve.

OPERATION

Before entering the shower

1. Activate filter by running hot water through the shower system
2. Cool to desired temperature before entering shower.
3. Recommended to replace the filter cartridge annually.

HOW IT WORKS

