

Panasonic
heating & cooling solutions

R32 RESIDENTIAL &
LIGHT COMMERCIAL
AIR CONDITIONING



WWW.HRV.CO.NZ | 0800 478 123



The new Panasonic NX series

The next generation is now

The new CONEX remote controller (CZ-RTC6WBLW2/CZ-RTC6BLW2/CZ-RTC6WZ2/CZ-RTC6Z2) multiplies the benefits of a standard nanoe™X installation, letting you create clean, healthy air in your living spaces 24 hours a day, anytime, anywhere. Choose your quality of air - a new era in air conditioning solutions is here.



24-hour nanoe™X Air Purification

Unlike the general filters found in an air purifier, nanoe™X achieves a powerful inhibiting effect on not only airborne, but also adhered bacteria and viruses.

P. 6-9

CONTENTS

Product Line-up	4 - 5
Better Air Quality	6 - 9
Panasonic IoT Solution	10 - 11
CONEX & CONEX Zone Controller Comparison	12 - 13
CONEX	14 - 17
CONEX Zone Controller	18 - 19
Outdoor Unit	20 - 21

Indoor Unit	
High Static Pressure Splittable Ducted	22 - 27
High Static Pressure Adaptive Ducted	28 - 31
Ultra Slim Ducted	32 - 33
4-WAY Cassette	34 - 37
Low Profile Mini Cassette	38 - 39
Under Ceiling	40 - 43
Wall Mounted	44 - 45
Floor Console	46 - 47
Smart Control Management Solutions	
Panasonic Comfort Cloud	50 - 51
Home Automation	52 - 53
PAC Smart Connectivity ⁺	54 - 59
Panasonic AC Smart Cloud	60 - 61
Controllers	62 - 67

24-hour⁺
nanoe™ X Air purification



P. 14-17

Make comfort more accessible with CONEX

CONEX goes beyond simple remote control to combine sophistication with simplicity, offering IoT integration that connects directly to a variety of apps for next-generation solutions.







P. 22-25 / P. 28-31




Maximum versatility adaptive ducted unit

Designed to deliver flexibility, performance, and comfort, Panasonic introduces an industry-leading horizontal/vertical design featuring powerful 150Pa static pressure in a compact unit.

Note: PF3 range only.

Product Line-up

		Cooling Capacity		2.5 kW	3.6 kW	5.0 kW
For Medium Sized Project	Indoor Unit	Ducted	NX Series Splittable Ducted High Static Pressure Model Page 22-27 for 6.0kW to 22.4kW 			
			NX Series Adaptive Ducted High Static Pressure Model Page 28-31 		S-3650PF3E 	S-3650PF3E 
		Cassette	NX Series 4-WAY Cassette * Panel is provided as an option (CZ-KPU3H/CZ-KPU3A) Page 34-37 			
			NX Series Low Profile Mini Cassette Page 38-39 	S-25PY3E 	S-36PY3E 	S-50PY3E 
		Under Ceiling	NX Series Page 40-43 			
		Wall Mounted	NX Series Page 44-45 	S-25PK4R 		S-50PK4R 
	Outdoor Unit	NX Series	R32 Deluxe Model Page 20-21  			
			R32 Compact Model Page 20-21  	U-25PZ3R5 	U-36PZ3R5 	U-50PZ3R5 
For Small Sized Project	Indoor Unit	Ducted	Ultra Slim Ducted Page 32-33 	CS-Z25UD3RAW 	CS-Z35UD3RAW 	CS-Z50UD3RAW 
		Floor Console	Page 46-47 	CS-Z25UFRAW 	CS-Z35UFRAW 	CS-Z50UFRAW 
	Outdoor Unit	R32 Model	 	CU-Z25UBRA 	CU-Z35UBRA 	CU-Z50UBRA 
For Wall Mounted Only	Outdoor Unit	Wall Mounted Model	Page 44-45  	U-RZ25AKR 		U-RZ50AKR 

	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW	16.0 kW	18.0 kW	20.0 kW	22.4 kW	
	S-60PE4R 	S-71PE4R 	S-100PE4R 	S-125PE4R 	S-140PE4R 	S-160PE4R/RA 	S-180PE4R 	S-200PE4R 	S-224PE4R 	
	S-6071PF3E 	S-6071PF3E 	S-1014PF3E 	S-1014PF3E 	S-1014PF3E 					
	S-6071PU3E 	S-6071PU3E 	S-1014PU3E 	S-1014PU3E 	S-1014PU3E 					
S-60PY3E 										
	S-6071PT3E 	S-6071PT3E 	S-1014PT3E 	S-1014PT3E 	S-1014PT3E 					
		S-71PK4R 	S-100PK4R*1 	*1 3-Phase is connected to U-100PZ4R8. The different-diameter-tube joint must be procured locally for installation.						
		U-71PZH3R5 	U-100PZH3R5 U-100PZH3R8*2 	U-125PZH3R5 U-125PZH3R8*2 	U-140PZH3R5 U-140PZH3R8*2 	U-160PZH3R5 U-160PZH3R8*2 	U-180PZH3R5 U-180PZH3R8*2 	U-200PZH3R8*2 	U-224PZH3R8*2 	
	U-60PZ4R5 	U-71PZ4R5 	U-100PZ4R5 U-100PZ4R8*2 	U-125PZ4R5 U-125PZ4R8*2 	U-140PZ4R5 U-140PZ4R8*2 					*2 3 Phase
CS-Z60UD3RAW 										
CU-Z60UBRA 										
		U-RZ71AKR 	U-RZ95AKR U-100PZ4R8*2 							

24-hour nanoe™ X Air Purification^{*1}

nanoe™ X



Technical information

nanoe™ X works to inhibit longer-living, adhered bacteria and viruses. The CONEX remote control (CZ-RTC6WBLW2/CZ-RTC6BLW2/CZ-RTC6WZ2/CZ-RTC6Z2) gives you access to your air conditioner anywhere, anytime, so you can turn nanoe™ X on even while you're out and enjoy 24-hour quality air in your home.

Airborne Viruses

Last up to 3 hours

Glass surface

Virus lifespan up to 4 days

Adhered Viruses

Last up to 2-7 days

Wood

Virus lifespan up to 2 days


Fabrics

Virus lifespan up to 2 days

^{*1} The nanoe™ X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function.

nanoe™ X Device Evolution


Dramatically increased release of hydroxyl radicals and making the high concentration of nanoe™ X in the space. The latest device, nanoe™ X Generator Mark 3, can be used in large spaces of more than 100 m² with greater effectiveness.

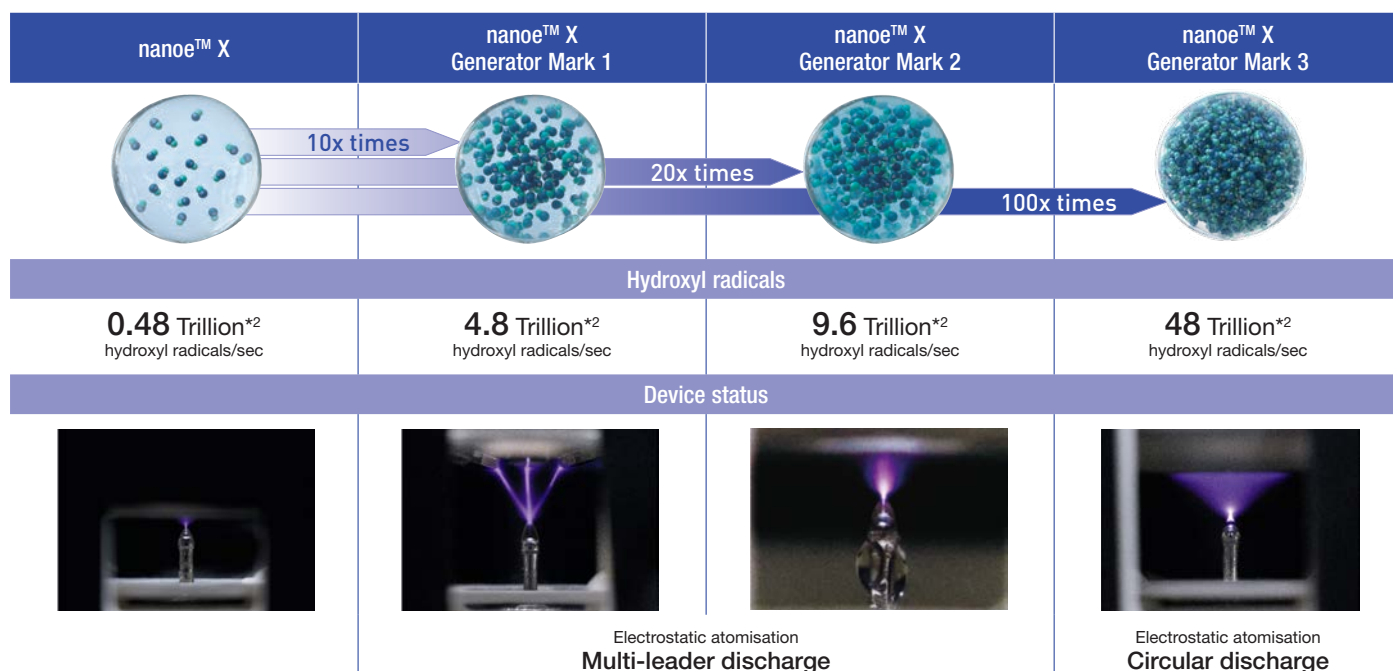

^{*2} Measured using the ESR method (amount of hydroxyl radicals immediately after release from the generator. (Source: Panasonic internal research))




nanoe™ X works even in larger spaces^{*3}

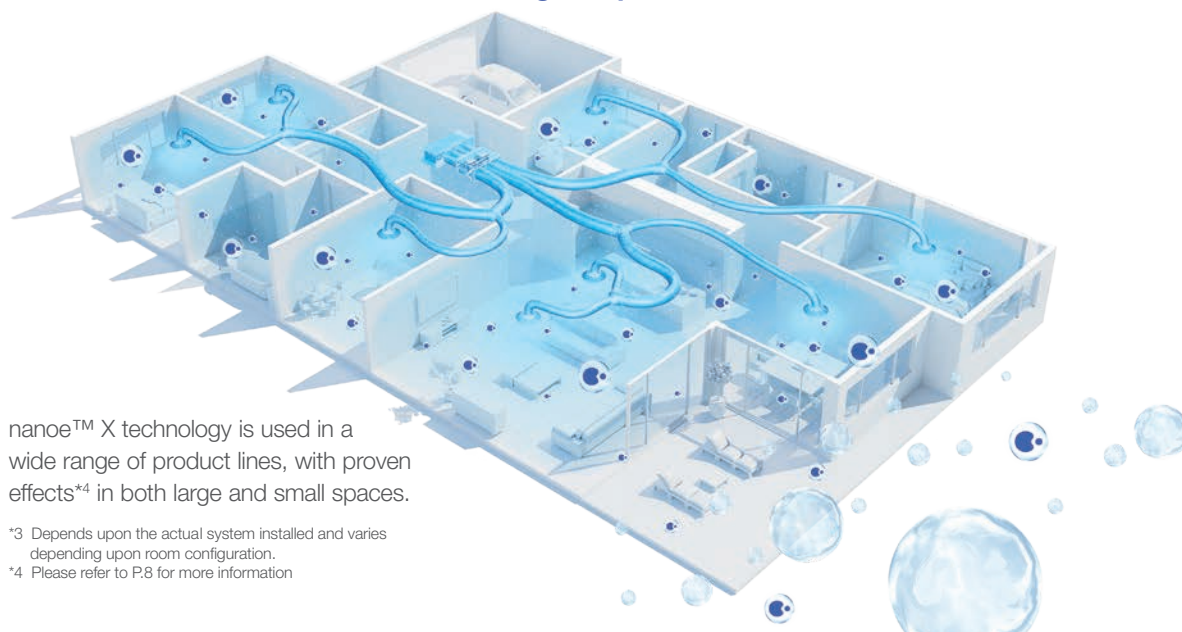


nanoe™ X technology is used in a wide range of product lines, with proven effects^{*4} in both large and small spaces.

^{*3} Depends upon the actual system installed and varies depending upon room configuration.

^{*4} Please refer to P.8 for more information

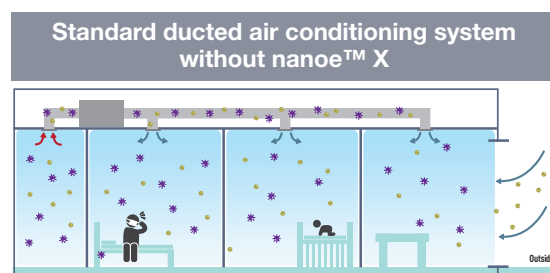

Viruses or bacteria carried by a room's occupants, as well as external pollutants from open windows, may actually be circulated around a home by conventional air conditioning.

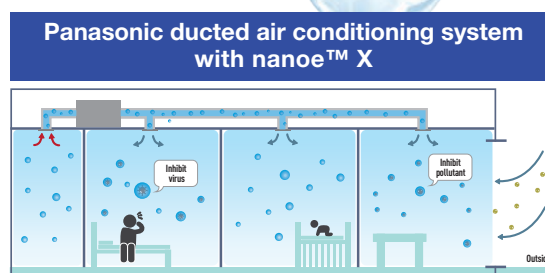

With a nanoe™ X-equipped ducted unit, it's not only viruses and bacteria that are circulated, the ducted unit itself produces a massive 9.6 trillion hydroxyl radicals per second which are delivered to rooms throughout the house, inhibiting viruses and bacteria.

24hr nanoe™ X comfort, wherever you are, anywhere, anytime

Get 24 hr Quality Air for you and your loved ones by turning nanoe™ X on using Panasonic Comfort Cloud^{*5} even when you're out, and enjoying clean air when you're at home. nanoe™ X functions in both cooling and heating modes and is maintenance-free, helping you keep your costs down with cleaner air.

**Clean air independently when you are away
(Fan Mode + nanoe™ X ON)**

**Comfort and Clean air when you are at home
(Cooling or Heating Mode + nanoe™ X ON)**

Only at 70W/Hour^{*6}
Low energy consumption with fan mode 70W per hour for a single unit.

Maintenance-Free
No maintenance required for nanoe™ X generator device.



^{*5} Wireless LAN Remote Control for Internet Connection required optional network adaptor. Indoor temperature display and some special function are not available through the App for some models.

^{*6} Energy consumption may vary depending on models and the external static pressure.

Verification tests for nanoe™ X effects in large spaces



Hazardous
substances

The nanoe™ X inhibited hexadecane, a chemical contained in PM2.5 (267m²)

3rd party


A third-party certification organization SIRIM Berhad (SIRIM)*¹, conducted the performance experiment using a 4-Way Cassette equipped with a nanoe™ X device to inhibit hexadecane*², a chemical contained in PM2.5.



*¹ SIRIM is a premier industrial research and technology organisation in Malaysia, a wholly-owned company of the Malaysian Government under the Ministry of International Trade and Industry (MITI).

*² Hexadecane is a hazardous substance contained in gasoline and diesel exhaust gas.

Testing method: Measured the amount of attached organic substances in an approximately 802 m³ sized test room
Inhibition method: nanoe™ X Generator Mark 1 released
Test substance: Hexadecane
Test result: Broken down 92% in 8 hours (ETRC257/16/1402 (R479/19))

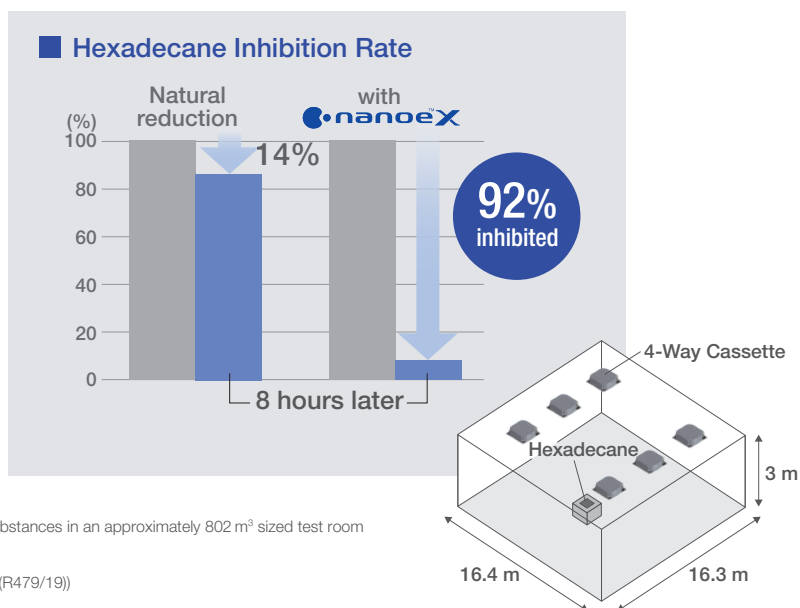

odours

The nanoe™ X reduced the odours adhering to fibres such as curtains and carpets (139m²)

3rd party

Cigarette smoke odour


Results

Compared to natural reduction, the nanoe™ X blast reduced the odour intensity by more than approximately 0.7 after two hours.

Testing organization

KAKEN TEST CENTER General Incorporated Foundation in Japan, international testing institute.

Testing method: Verified using the six-level odour intensity scale method in an approximately 378 m³ sized test room
Inhibition method: nanoe™ X Generator Mark 2 released
Test substance: Surface-attached cigarette smoke odour
Test result: Odour intensity reduced by 0.7 levels in 2 hours (KT-19-015089-1)

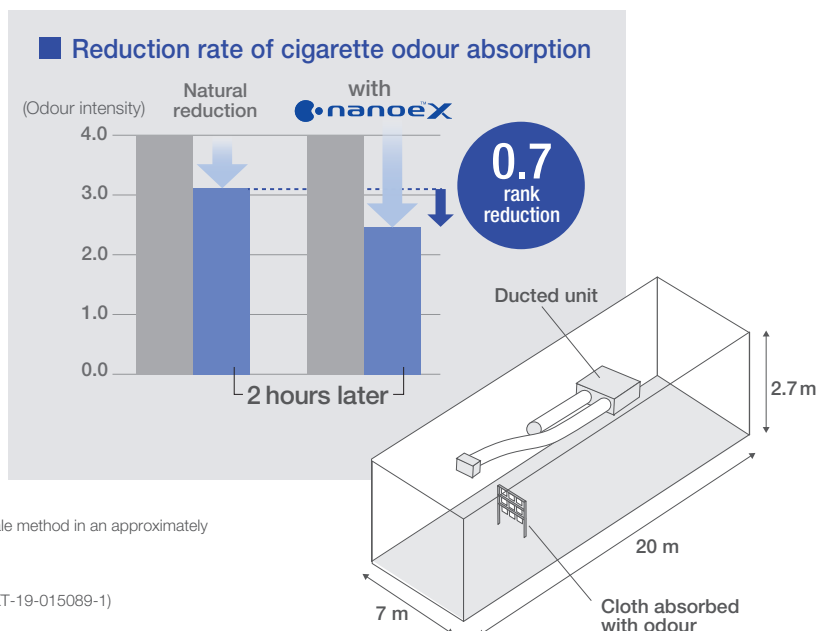

The effects of nanoe™ X are recognised by experts in each field




**Professor
Masafumi
Mukamoto**

Osaka Prefecture University
Veterinary Infectious
Disease Studies



Various types of moulds enter houses along with people and air. Even if preventive action is taken in our everyday lives, it is often very difficult to inhibit the growth of mould, especially in humid environments. With nanoe™ X, we have experimental results^{*3*4} that show we can inhibit the growth of the types of mould and bacteria commonly found in various places in the house.

Hope for the creation of more comfortable spaces for those who have problems with asthma or atopic dermatitis



**Professor
Masahiro
Sakaguchi**

Azabu University
School of Veterinary Medicine
Laboratory of Veterinary
Microbiology I



We have experimental results that show nanoe™ X is capable of inhibiting allergens, such as pollen and dust mites. It is important to take precautions against the allergens that we inadvertently inhale in our daily lives.

As nanoe™ X is effective in inhibiting invisible allergens, we can expect it will create a cleaner environment. As the safety of nanoe™ X has also been verified, nanoe™ X gives peace of mind to families with small children.

^{*3} Experimental results show that nanoe™ X is effective in inhibiting the growth of the following types of mould and bacteria commonly found in homes:
Mould: Trichophyton, Cladosporium, Malassezia furfur, Sporothrix schenckii, Exophiala jeikei, Absidia corymbifera, Rhodotorula rubra, Neurospora sitophila, Schizophyllum commune
Bacteria: Methicillin-resistant Staphylococcus aureus (MRSA), Listeria monocytogenes, Bacillus subtilis, Mycobacterium smegmatis, Nocardia asteroides, Neisseria gonorrhoeae, Salmonella enterica subsp. Enterica, Haemophilus influenza, Campylobacter jejuni.

^{*4} This verification was designed to generate basic research data on the effects of nanoe™ X on the mould and bacteria in laboratory conditions different from those found in living spaces. It was not designed to evaluate product performance.

Provide a New Gateway that Creates New Value for the Air Conditioning Business


Panasonic utilises advanced IoT technology and cloud service to provide new values that go beyond just cooling and heating solutions.



Employee



Biz Owner



Bluetooth®



Controller/Adaptor



Administrator



Comfort Cloud

Panasonic
AC Smart Cloud**Cloud**
(New Gateway)

Shop Owner



Bldg. Owner



Owner's family



House Owner

Panasonic IoT Solution (Remote Controllers & App)

Delivering new value with heating and cooling and air quality solutions.

Comfort Cloud × CONEX Zone Controller — For Residential

For Residential

For Apartments


CZ-RTC6WZ2

**CONEX**
Zone controller

Comfort Cloud



For Home Owners

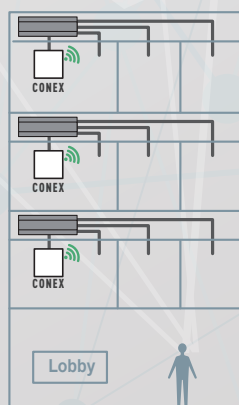

For Small Business Owners

Comfort Cloud × CONEX — For Light commercial

Single site


Multi site




CZ-RTC6WBLW2

**CONEX**

Comfort Cloud



For Small Business Owners

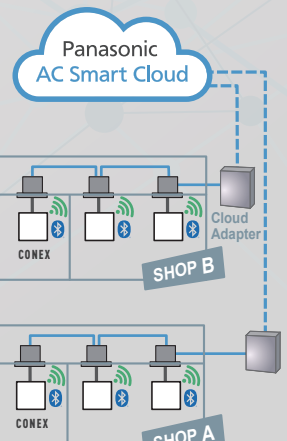

* If owners have a multisite business, they can also use Smart Cloud for total management.



Pre-Cool Your Office Before Arriving



To enjoy the most comfortable day at work, pre-cool it before reaching and be greeted with a cool and pleasant office.



Conveniently Turn All OFF/ON Easily



Never have to worry about individually switching OFF/ON your air conditioner units. With a tap, you can turn all your air conditioner OFF/ON.



Purifies Your Office with nanoe™ X




With the Comfort Cloud App, you can easily turn on the nanoe™ mode anytime, anywhere.



Statistics



Requirements for Connecting with Panasonic Comfort Cloud App



External Adaptor,
Remote Controller
Network



Comfort Cloud x CONEX Zone Controller — For Residential



Individual Comfort and Energy Saving

Airflow Volume Control

The damper opening can be controlled with the Comfort Cloud app. Adjust the air volume conveniently according to your daily life.



The living room damper opening is increased.




For daily naps, reduce the air volume so that it doesn't get too cold.

Auto-optimised Comfort for Your Lifestyle

Weekly Timer

Able to set 6 timers per day of the week. Realise optimal control day & night for your lifestyle with timers.



Pre-cool 30 minutes before going to bed, living zone off 30 minutes later.



Cool your bedroom on weekend mornings to suit your oversleep.

Purifies Your Room with nanoe™ X


24hr Clean Air



When you go out, clean the air with the nanoe™ mode. Pre-cool the living zone according to the time you return home.



Zone Status



Statistics



Other Hardware Requirements*

Router - Internet - Smartphone
(Required 2.4GHz band WLAN network)

*Purchase and subscribe separately



Comfort Cloud

Download on the
App Store

GET IT ON
Google Play


Download Free App

Panasonic Comfort
Cloud app

Note: Product images not to scale.


Smart comfort with CONEX

CONEX goes beyond simple remote control to combine sophistication with simplicity, offering IoT integration that connects directly to a variety of apps for next-generation solutions.

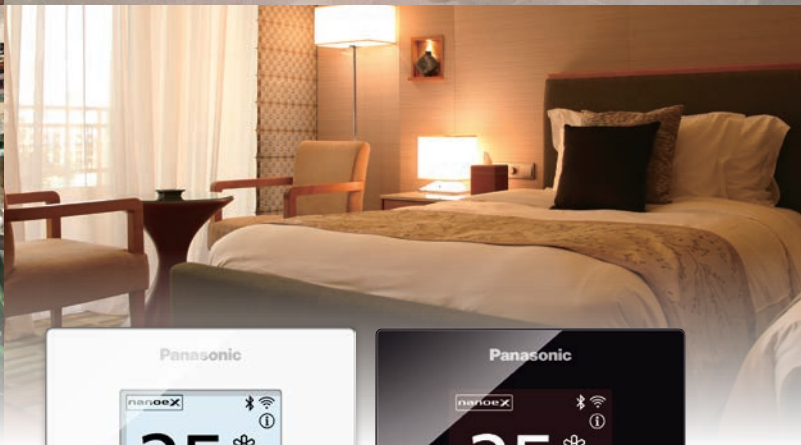

Simple and sophisticated design in-and-out

User friendly interface with stylish design measuring just 86 x 86 mm, CONEX is an extremely compact remote controller which looks great in any room.



(CZ-RTC6WBL/CZ-RTC6WBLW2)



(CZ-RTC6BL/CZ-RTC6BLW2)


CONEX

Easy control and access for end users, installers, and service partners with just one remote

User-friendly day-to-day operation for end users, simplified set up for installers, and convenient after-sales service access for service partners - all with one remote control.



A next-generation remote control solution optimised for usability, whatever your needs

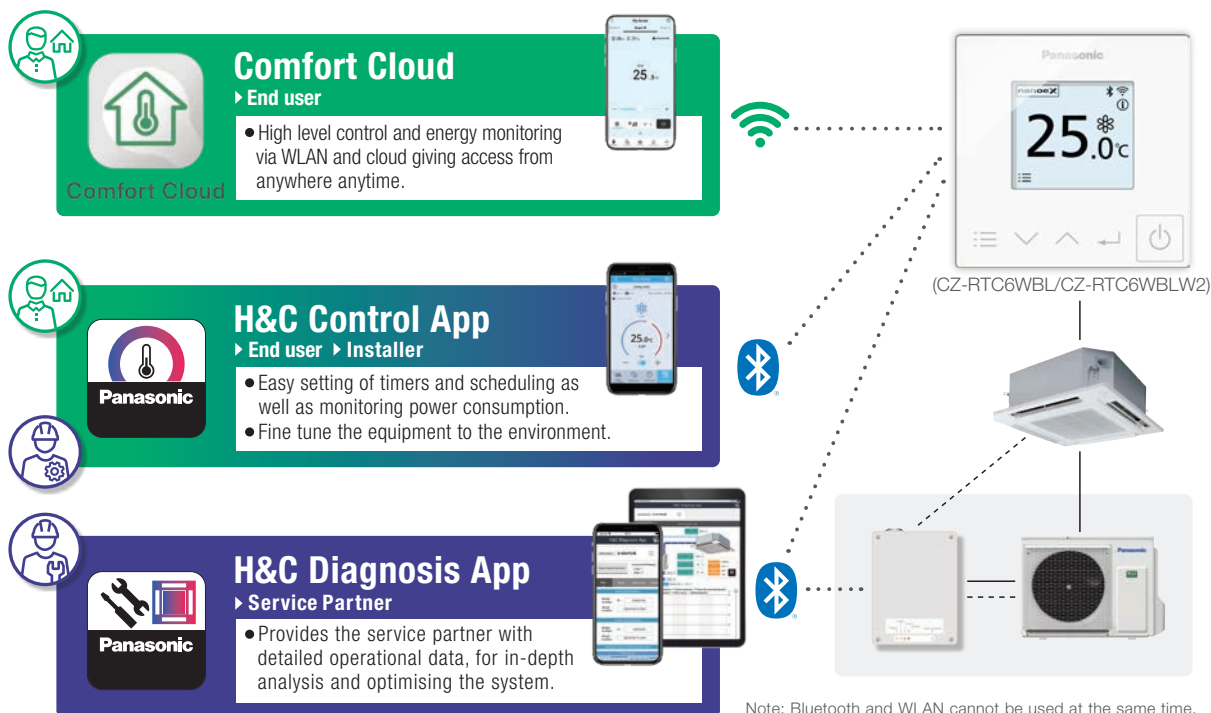


Note: Can be used with new NX series only.

True-comfort for end user— Comfort Cloud App

With Comfort Cloud, even when you are out, at anytime, you can maintain air quality as you please.



Comfort Cloud

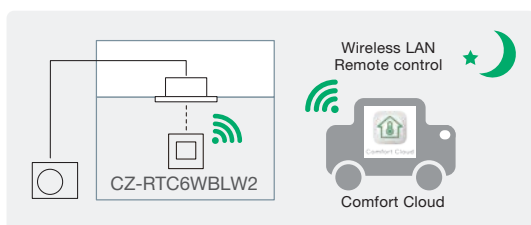

For restaurant owners

Remote control makes 24-hr nanoe™ X air purification*1 in restaurants a reality, even when they're closed.



For shop owners

Air conditioning before opening and give visitors a more comfortable experience.

For boutique hotel owners


Air conditioning before your guests arrive and give them the welcome they deserve.

*1 The nanoe™ X mode can be run independently from cooling or heating mode, and needs to be on for the 24 hour air purification to function.

Note: Product images not to scale.

True-comfort for end user and installer – H&C Control App

H&C Control App makes complex initial set-up easy and allows you to respond swiftly to clients' requests via Bluetooth using a smartphone or tablet.



Advantages

Comfort day-to day operations

It's now simpler than ever for end users to further customise settings to meet their needs and perform operations including basic settings.

Intuitive operation for easy configuration


Simplified initial controller configuration together with easy access to comprehensive settings including weekly timer and maintenance.

Straightforward suggestions to clients

Share a single screen with your customer and together tailor, everything to meet their needs, from basic setup to weekly timers, all in real time.

Quicker configuration for multiple controllers

Save time with templates - Copy weekly timers and settings to multiple controllers.

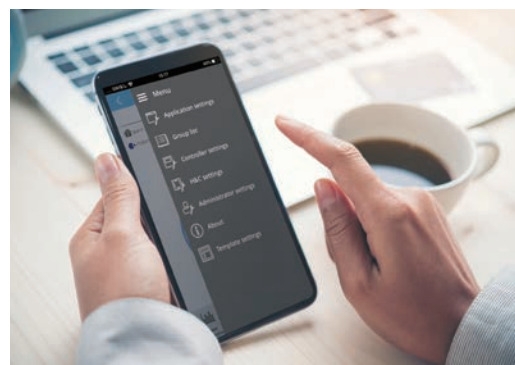

True-comfort for service partners – H&C Diagnosis App

The H&C Diagnosis App allows users to intuitively browse current stats and information about an air conditioner via Bluetooth® using a smartphone or tablet and without the need to use a PC.



Advantages

Acquire diagnostic information from both outside and inside


Outdoor diagnosis is now possible via a new service checker interface*. With CONEX, operation status can be checked and failure can be diagnosed from indoors too. The information you need is now available via both indoor and outdoor units even when site access may be difficult for either indoor or outdoor unit.

*1 Available as a spare part, compatible with new NX series only.


Acquire the information you need intuitively and quickly

Easy access to real-time service parameters and service checker data allows for more accurate repairs. Actual real-time operation data can be toggled between system and refrigerant circuit views, and previously recorded data can be viewed in the history.

A comprehensive error code table and guide gives details of error codes and how to handle them.

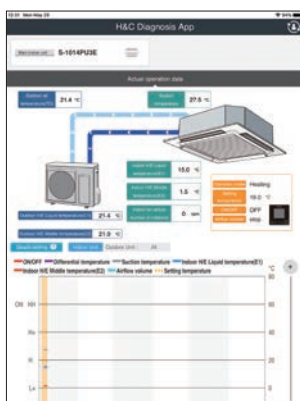

Refrigerant circuit view

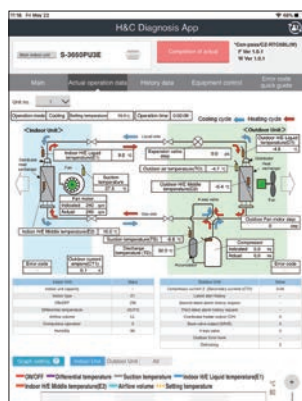

Real time data




History data



New service checker interface

Next Generation One-touch Control, Anytime, Anywhere

Air conditioning for each zone anytime, anywhere according to your needs.
Enabled by the fusion of Panasonic's IoT technology and cloud service.

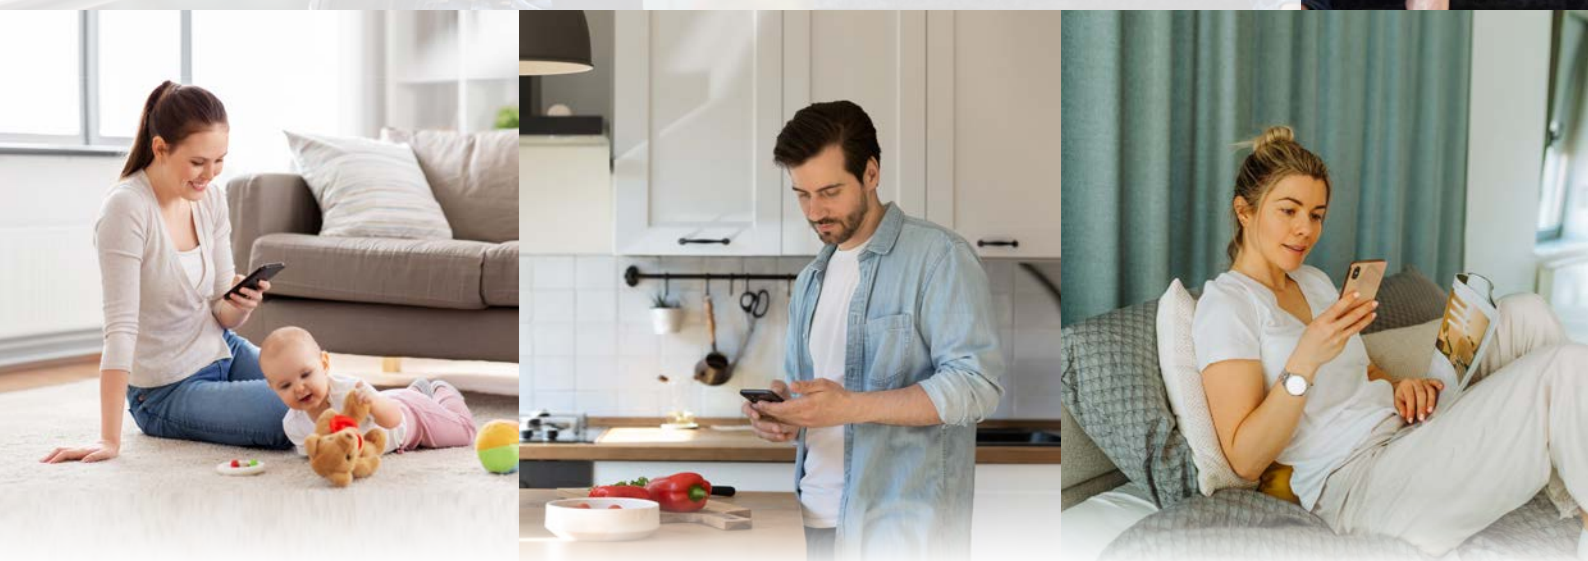


Comfortable Zone Air Conditioning with Stress-free Operation



Individual comfort

•Airflow volume control


The damper opening can be controlled with the Comfort Cloud App.
Easily adjust airflow volume according to your lifestyle.



(CZ-RTC6WZ2)



(CZ-RTC6Z2)



Auto optimised comfort for your lifestyle

•Weekly timer

You can set 6 timers per day.
Use timers to enjoy optimal control day and night to match your lifestyle.



Enable comfort for whole family

•Target temperature control

The temp targeted zone can be switched easily according to how you and your family spend time, making the whole family comfortable.


Manage Up to 8 Zones with an Advanced Zone Control System

CONEX
Zone Controller

Product movie



Ducted
Air Conditioner



Intuitive Control with Comfort Cloud App

Each family member can control
home AC from multiple devices




Comfort Cloud

Compatible Device and Browsers.
Check on the relative app store for supported OS versions.



Zone controller CZ-RTC6WZ2

Thanks to built-in
WLAN RC, set up
is easy

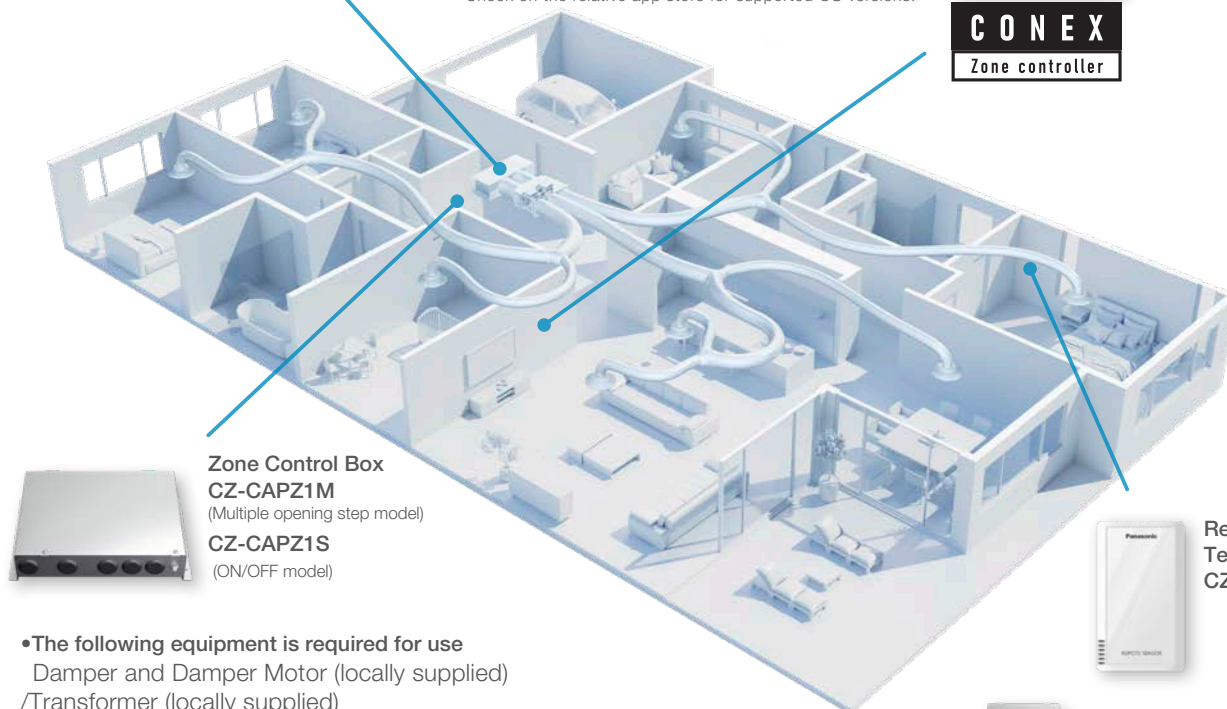

Zone Control Box
CZ-CAPZ1M
(Multiple opening step model)
CZ-CAPZ1S
(ON/OFF model)



Remote
Temperature Sensor
CZ-CSRC3 (optional)

- The following equipment is required for use
Damper and Damper Motor (locally supplied)
/Transformer (locally supplied)

Zone Remote Controller

Spec & dimensions

Model No.	CZ-RTC6WZ2
Dimensions	(H) 86 mm x (W) 86 mm x (D) 25 mm
Weight	0.10 kg
Temperature / Humidity range	0°C to 40°C / 20% to 80% (No condensation) • Indoor use only.
Power Source	DC16 V (supplied from indoor unit)
Wireless LAN standard	IEEE 802.11 b/g/n
Frequency range	2.4 GHz band
Encryption	WPA™ / WPA2™ / WPA3™
OS version on the mobile device for CFC	Check on the relative app store for supported OS versions.



Zone Control Box

Spec & dimensions

Model No.	CZ-CAPZ1S/CZ-CAPZ1M
Dimensions	(H) 250 mm x (W) 342 mm x (D) 70 mm
Weight	1.9 kg



Remote Temperature Sensor

Spec & dimensions

Model No.	CZ-CSRC3
Dimensions	(H) 120 mm x (W) 70 mm x (D) 17 mm
Weight	70 g
Temperature / Humidity range	0°C to 40°C / 20% to 80% (No condensation) • Indoor use only.



Usable indoor units

Zone Controller can be connected with 3.6 kW to 22.4 kW Ducted (PF3 and PE4) Indoors and VRF Ducted units (M1, E1, E2, E1R, F2, F3 and Z1).

*Connectable to selected Panasonic ducted models only, please consult Panasonic for more details.

Series	PE4	PF3
Capacity	6.0 kW-22.4 kW	3.6 kW-14.0 kW



Note: Product images not to scale.

** iOS is the name of the OS of Apple Inc. iOS is a trademark or registered trademark of Cisco in the US and other countries where it is licensed for use. Apple and the Apple logo are trademarks of Apple Inc. that are registered in the US and other countries. App Store is a service mark of Apple Inc.

** Android™, Google Play™ and Google Play™ logos are registered trademarks of Google LLC.

All side discharge R32 outdoor units

Panasonic's new range of outdoor units feature intuitive technology and thoughtful engineering. The two innovative ranges of R32 units, both Deluxe and Compact, feature energy and space saving technologies, permitting installation in even the tightest and most demanding conditions.



More Efficient, Less Space

Whilst maintaining its strong power, new R32 outdoor units get smaller. This enables them to fit into tighter spaces. Thus you can install these units in a vast variety of areas.

All side discharge from 6.0kw to 22.4kW

R32 Deluxe



U-71PZH3R5



U-100PZH3R5
U-100PZH3R8*1



U-125PZH3R5
U-125PZH3R8*1



U-140PZH3R5
U-140PZH3R8*1



U-160PZH3R5
U-160PZH3R8*1



U-180PZH3R5
U-180PZH3R8*1



U-200PZH3R8*1



U-220PZH3R8*1

Industry-leading Small Body with All 1-fan Models

R32 Compact



U-25PZ3R5



U-36PZ3R5




U-50PZ3R5



U-60PZ4R5



U-71PZ4R5



U-100PZ4R5



U-100PZ4R8*1



U-125PZ4R5
U-125PZ4R8*1




U-140PZ4R5
U-140PZ4R8*1

*1 3 phase

NX Series - Refurbishing Made Easy

The new NX series has been developed to use 3-wired communication, making it simple to replace the three wire systems often used in older installations.

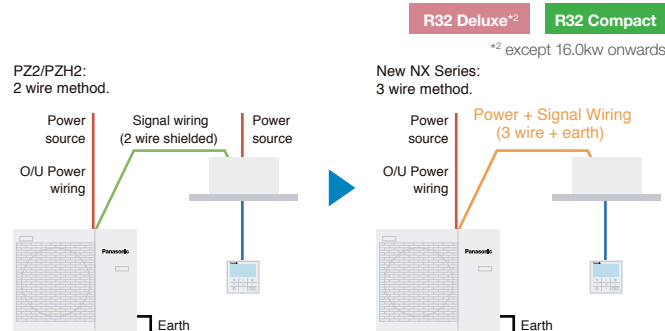

Next Generation Refrigerant: R32

R32, an innovative refrigerant in all ways imaginable: it is easy to install, and compared to most other refrigerants it has a much lower environmental impact and saves energy.


- Low Global Warming Potential (GWP): 75% less impact on global warming vs R410A
- Energy Efficient: Higher energy efficiency than R410A
- Easy Installation: This refrigerant is 100% pure which makes it easier to recycle and reuse.

Other Advanced Technology

Increased Piping Length for Greater Design Flexibility

Adaptable to various building types and sizes

Max. piping length :
 30m (7.1kW),
 85m (10.0kW-14.0kW),
 100m (16.0kW, 18.0kW)
 60m (20.0kW, 22.4kW)



Product Quality and Safety

All Panasonic air conditioners undergo strict quality and safety tests before sale. This rigorous process includes obtaining all necessary Safety Approvals, to ensure that all air conditioners we sell are not only built to the highest market standards, but are also completely safe.




Quiet Mode

Quiet mode reduces outdoor operating sound by 2dB. External input signal is also available.

Demand Response Compliant

Panasonic air conditioners are equipped with a Demand Response Enabling Device (DRED) which complies to both AS 4755 and AS 3823. Panasonic continues to design and develop products that are tailored to local needs and requirements.

The Equipment Energy Efficiency (E3) program has been supporting the development of DRED standards for air-conditioners which should comply with AS 4755. The functionality will be required for all installations in the very near future

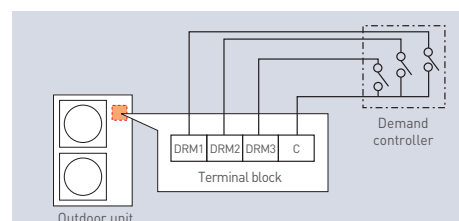

Demand control terminal is available to control 0-50-75-100% of capacities.

NEW /// Indoor Unit**High Static Pressure**

Splittable Ducted

High static and large airflow ducted for exceptional installation flexibility.

nanoe™ X**Generator Mark3**

nanoe™ X as a standard



Self-diagnosing Function



Automatic Fan Operation



Dry Mode



Automatic Restart Function



DC Motor

Technical focus


- Easy installation with splittable chassis design
- Design flexibility thanks to high static pressure and large air volume
- Accurate temperature control to reduce cold drafts during operation
- Configurable air temperature control

Splittable unit makes installation easier in the roof space

- 1 Easy to carry and install, with a separated heat exchanger and fan casing.
- 2 The pre-installed oval duct saves you cost and effort.
- 3 Only 10 screws are required for assembly.




More compact than ever - significantly easier installation with split design

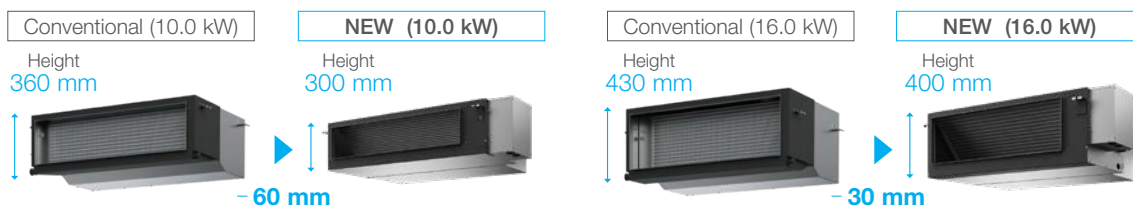

Easy Assembly Steps

Assembly takes three easy steps, even in limited spaces.


- 1 Install the fan to the heat exchanger and tighten the screws and bolts.



- 2 Assemble the connectors.



- 3 Install the chassis and tighten the screws and bolts.

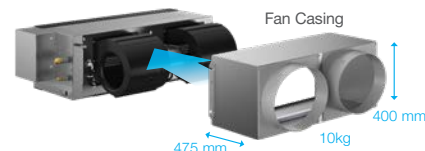

Note: Above images are for the 16.0 kW model.

S-60PE4R
S-71PE4R
S-100PE4R



S-125PE4R
S-140PE4R
S-160PE4R
S-160PE4RA



HSP Ducted



Dimensions

HSP Ducted



Product movie



CZ-RTC6WBL*1
CZ-RTC6WBLW2*1



CZ-RTC6WZ2*1*2



CZ-RTC5B



CZ-RTC4A




CZ-CAPWFC2

*1 Black models are also available.
*2 Zone Controller for residential use.
Note: Product image not to scale.

Clean air. Ducts that deliver

Testing has verified that even with three bends and a total length of up to 10m, the effectiveness of nanoe™ X is maintained right through the duct to deliver clean, fresh air where it's needed.

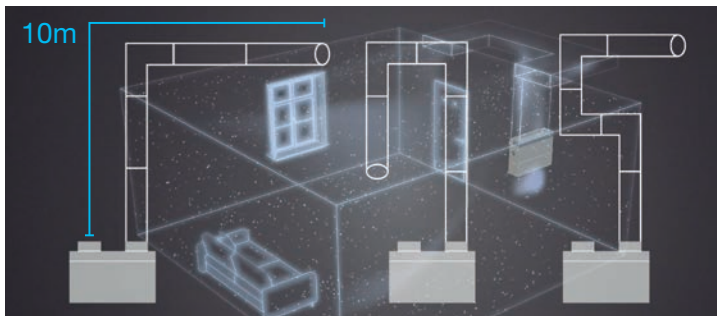

Bend once

Bend twice

Bend three times

As the experiments demonstrate, even with a total ductwork length of up to 10m, effectiveness of nanoe™ X is maintained.

Note: PF3 and PE4 (16.0kW and below) ranges only.

Equipped with nanoe X Generator Mark3

- Charged water particles contain hydroxyl (OH) radicals that work to provide improved quality air
- No need to clean or replace the device (maintenance free)

- Discharging device generates 48 trillion of OH radicals




Installation in underfloor spaces is made possible by the R32 sensor

Circulates the air to prevent the refrigerant from accumulating in one place and reaching a high concentration when refrigerant leak is detected.

Built-in R32 sensor monitors refrigerant leak risks ensuring a safe and secure environment.

* Equipped only on S-160PE4RA

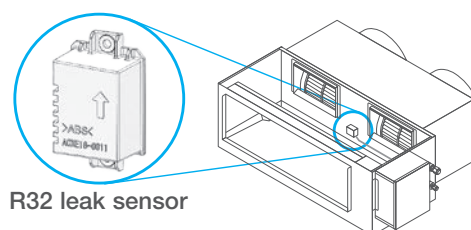

R32 leak sensor

Indoor Unit: **High Static Pressure Ducted**

High Static Pressure Duct R32 Deluxe model **R32**
REFRIGERANT

Capacity			7.1kW		10.0kW		12.5kW		
Model Name	Indoor Unit		S-71PE4R	S-100PE4R	S-100PE4R	S-125PE4R	S-125PE4R	S-125PE4R	
	Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8	U-125PZH3R8	
Cooling capacity : Heating capacity		kW	7.1 (2.2 ~ 9.0) 8.0 (2.05 ~ 9.0)	10.0 (3.1 ~ 12.5) 12.5 (3.8 ~ 14.0)	10.0 (3.1 ~ 12.5) 12.5 (3.8 ~ 14.0)	12.5 (3.2 ~ 14.0) 14.0 (3.6 ~ 16.0)	12.5 (3.2 ~ 14.0) 14.0 (3.6 ~ 16.0)	12.5 (3.2 ~ 14.0) 14.0 (3.6 ~ 16.0)	
			BTU/h	24,200 (7,500 ~ 30,700) 27,300 (7,000 ~ 30,700)	34,100 (10,600 ~ 42,700) 42,700 (12,800 ~ 47,800)	34,100 (10,600 ~ 42,700) 42,700 (12,800 ~ 47,800)	42,700 (10,900 ~ 47,800) 47,800 (12,300 ~ 54,600)	42,700 (10,900 ~ 47,800) 47,800 (12,300 ~ 54,600)	42,700 (10,900 ~ 47,800) 47,800 (12,300 ~ 54,600)
EER : COP		W/W	3.55 : 4.17	3.79 : 3.99	3.79 : 3.99	3.79 : 4.24	3.79 : 4.24	3.79 : 4.24	
COPiH2 condition		W/W	4.08	3.93	3.93	4.16	4.16	4.16	
Total power input	Residential	Cooling : Heating	kW	2.00 : 1.92	2.64 : 3.13	2.64 : 3.10	3.30 : 3.30	3.30 : 3.30	3.30 : 3.30
		Hot Climate		5.33 : 5.13	5.26 : 5.35	5.26 : 5.35	5.53 : 5.47	5.53 : 5.47	5.53 : 5.47
		Average Climate		4.66 : 4.51	4.70 : 4.50	4.70 : 4.50	4.93 : 4.69	4.93 : 4.69	4.93 : 4.69
		Cold Climate		4.77 : 4.02	4.78 : 3.95	4.78 : 3.95	5.04 : 4.18	5.04 : 4.18	5.04 : 4.18
		Hot Climate		6.09 : 5.15	5.77 : 5.43	5.77 : 5.43	6.14 : 5.55	6.14 : 5.55	6.14 : 5.55
		Average Climate		6.21 : 4.80	5.96 : 4.95	5.96 : 4.95	6.46 : 5.12	6.46 : 5.12	6.46 : 5.12
		Cold Climate		6.86 : 4.35	6.40 : 4.40	6.40 : 4.40	7.00 : 4.60	7.00 : 4.60	7.00 : 4.60
Indoor Unit									
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	
		V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	
Current (rated)	Cooling : Heating	A	1.46 / 1.34 1.46 / 1.34	1.82 / 1.70 1.82 / 1.70	1.82 / 1.70 1.82 / 1.70	1.83 / 1.71 1.83 / 1.71	1.83 / 1.71 1.83 / 1.71	1.83 / 1.71 1.83 / 1.71	
Dimension	H x W x D	Indoor	mm	300 X 1,297 X 877	300 X 1,297 X 877	300 X 1,297 X 877	400 X 1,297 X 949	400 X 1,297 X 949	
Net weight		Indoor	kg	51	51	51	61	61	
Air volume (H/M/L)		Cooling : Heating	L/s	500 / 433 / 366 : 500 / 433 / 366	700 / 566 / 483 : 700 / 566 / 483	700 / 566 / 483 : 700 / 566 / 483	833 / 766 / 600 : 833 / 766 / 600	833 / 766 / 600 : 833 / 766 / 600	
External static pressure			Pa	80 (10 - 150)	80 (10 - 150)	80 (10 - 150)	80 (10 - 150)	80 (10 - 150)	
Sound pressure level (H/M/L)		Cooling : Heating	dB(A)	43 / 39 / 35 : 43 / 39 / 35	42 / 37 / 34 : 42 / 37 / 34	42 / 37 / 34 : 42 / 37 / 34	42 / 39 / 34 : 42 / 39 / 34	42 / 39 / 34 : 42 / 39 / 34	
Sound power level (H/M/L)		Cooling : Heating	dB	69 / 65 / 61 : 69 / 65 / 61	68 / 63 / 60 : 68 / 63 / 60	68 / 63 / 60 : 68 / 63 / 60	68 / 65 / 60 : 68 / 65 / 60	68 / 65 / 60 : 68 / 65 / 60	
Number of fan speeds				5	5	5	5	5	
Drain piping			mm	VP-25	VP-25	VP-25	VP-25	VP-25	
Outdoor Unit									
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	3 Phase / 50Hz	
		V	230V 240V	230V 240V	400V 415V	230V 240V	400V 415V	400V 415V	
Current (rated)	Cooling : Heating	A	9.65 : 9.30 9.35 : 9.00	12.5 : 14.8 12.0 : 14.2	4.20 : 4.95 4.05 : 4.80	15.8 : 15.8 15.1 : 15.1	5.05 : 5.05 4.90 : 4.90	5.05 : 5.05 4.90 : 4.90	
Dimension	H × W × D		mm	996 x 940 x 340	1,416 x 940 x 340	1,416 × 940 × 340	1,416 × 940 × 340	1,416 × 940 × 340	
Net weight			kg	66	99	99	99	99	
Air volume		Cooling : Heating	L/s	1,016 : 1,000	1,966 : 1,800	1,966 : 1,800	2,083 : 1,866	2,083 : 1,866	
Sound pressure level (H)		Cooling : Heating	dB(A)	48 : 50	52 : 52	52 : 52	53 : 53	53 : 53	
Sound power level (H)		Cooling : Heating	dB	64 : 66	68 : 68	68 : 68	69 : 69	69 : 69	
Piping connections		Liquid / Gas	mm	Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)	
Pipe length range		min. - max.	m	5 - 50	5 - 85	5 - 85	5 - 85	5 - 85	
Elevation difference (OU located lower, OU located higher)			m	15, 30	15, 30	15, 30	15, 30	15, 30	
Maximum chargeless length			m	30	30	30	30	30	
Refrigerant at shipping / Additional gas amount			g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	
Operating range	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	

Specifications of R32 Compact Model **R32**
REFRIGERANT

Capacity			6.0kW		7.1kW		10.0kW		12.5kW	
Model Name	Indoor Unit		S-60PE4R	S-71PE4R	S-100PE4R	S-100PE4R	S-125PE4R			
	Outdoor Unit		U-60PZ4R5	U-71PZ4R5	U-100PZ4R5	U-100PZ4R8	U-125PZ4R5			
Cooling capacity : Heating capacity		kW	6.0 (2.0 - 7.1) 6.0 (1.8 - 7.0)	7.1 (2.6 - 7.7) 7.1 (2.05 - 8.1)	9.5 (3.0 - 11.0) 10.0 (2.7 - 12.0)	10.0 (2.8 - 11.5) 10.0 (3.2 - 14.0)	12.5 (3.2 - 13.5) 12.5 (3.3 - 15.0)			
			20,500 (6,800 - 24,200) 20,500 (6,100 - 23,900)	24,200 (8,900 - 26,300) 24,200 (7,000 - 27,600)	32,400 (10,200 - 37,500) 34,100 (9,200 - 40,900)	34,100 (9,600 - 39,200) 34,100 (10,900 - 47,800)	42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)			
EER : COP		W/W	3.26 : 4.23	3.26 : 4.25	3.17 : 3.57	3.45 : 4.08	3.55 : 4.31			
COPiH2 condition		W/W	4.12	4.16	3.51	4.00	4.22			
Total power input	Cooling : Heating	kW	1.84 : 1.42	2.18 : 1.67	3.00 : 2.80	2.90 : 2.45	3.52 : 2.90			
TCSPF : HSPF	Residential	Hot Climate	4.76 : 5.20	4.55 : 5.11	4.55 : 4.69	5.02 : 4.99	5.05 : 5.12			
		Average Climate	4.26 : 4.51	4.12 : 4.48	4.09 : 3.98	4.49 : 4.40	4.54 : 4.56			
		Cold Climate	4.34 : 3.91	4.20 : 3.87	4.20 : 3.50	4.61 : 3.99	4.63 : 4.09			
	Commercial	Hot Climate	5.26 : 5.22	4.98 : 5.11	5.00 : 4.76	5.56 : 5.01	5.56 : 5.13			
		Average Climate	5.65 : 4.83	5.21 : 4.75	5.19 : 4.37	5.76 : 4.68	5.86 : 4.81			
		Cold Climate	6.09 : 4.29	5.59 : 4.22	5.60 : 3.89	6.25 : 4.30	6.32 : 4.40			
Indoor Unit										
Power source			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz		
			V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V		
Dimensions	H × W × D	Indoor	mm	300 x 1,297 x 877	300 x 1,297 x 877	300 x 1,297 x 877	300 x 1,297 x 877	400 x 1,297 x 949		
Net weight	Indoor / Panel		kg	51	51	51	51	61		
Air volume (H/M/L)	Cooling : Heating		L/s	366 / 333 / 266 : 366 / 333 / 266	500 / 433 / 366 : 500 / 433 / 366	700 / 566 / 483 : 700 / 566 / 483	700 / 566 / 483 : 700 / 566 / 483	833 / 766 / 600 : 833 / 766 / 600		
External static pressure			Pa	80 (10 - 150)	80 (10 - 150)	80 (10 - 150)	80 (10 - 150)	80 (10 - 150)		
Sound pressure level (H/M/L)	Cooling : Heating		dB(A)	38 / 36 / 32 : 38 / 36 / 32	43 / 39 / 35 : 43 / 39 / 35	42 / 37 / 34 : 42 / 37 / 34	42 / 37 / 34 : 42 / 37 / 34	42 / 39 / 34 : 42 / 39 / 34		
Sound power level (H/M/L)	Cooling : Heating		dB	64 / 62 / 58 : 64 / 62 / 58	69 / 65 / 61 : 69 / 65 / 61	68 / 63 / 60 : 68 / 63 / 60	68 / 63 / 60 : 68 / 63 / 60	68 / 65 / 60 : 68 / 65 / 60		
Number of fan speeds				5	5	5	5	5		
Drain piping			mm	VP-25	VP-25	VP-25	VP-25	VP-25		
Outdoor Unit										
Power source			Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz		
			V	230V 240V	230V 240V	230V 240V	400V 415V	230V 240V		
Current (rated)	Cooling : Heating		A	8.10 : 6.30 7.75 : 6.05	9.55 : 7.35 9.20 : 7.05	13.2 : 12.3 12.6 : 11.8	4.60 : 39.8 4.45 : 3.75	17.3 : 14.0 16.3 : 13.4		
Dimensions	H × W × D		mm	619 x 824 x 299	695 x 875 x 320	795 x 875 x 320	996 x 980 x 370	996 x 980 x 370		
Net weight			kg	35	45	55	80	83		
Air volume	Cooling : Heating		L/s	566 : 550	750 : 766	933 : 883	1,216 : 1,216	1,366 : 1,333		
Sound pressure level (H)	Cooling : Heating		dB(A)	47 : 47	47 : 49	54 : 54	52 : 52	55 : 55		
Sound power level (H)	Cooling : Heating		dB	65 : 65	65 : 67	72 : 72	70 : 70	73 : 73		
Piping connections	Liquid / Gas		mm	Ø6.35 (1/4) / Ø12.70 (1/2)	Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)		
Pipe length range	min. - max.		m	3 - 30	3 - 30	3 - 30	5 - 50	5 - 50		
Elevation difference (OU located lower, OU located higher)			m	15, 15	20, 20	20, 20	15, 30	15, 30		
Maximum chargeless length			m	10	10	10	30	30		
Refrigerant at shipping, Additional gas amount			g	R32 1,220 / 15 (g/m)	R32 1,350 / 25 (g/m)	R32 1,930 / 25 (g/m)	R32 2,400 / 45 (g/m)	R32 2,800 / 45 (g/m)		
Operating range	Cooling : Heating		°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24		

14.0kW			16.0kW		
S-140PE4R	S-140PE4R	S-140PE4R	S-160PE4R	S-160PE4RA	S-160PE4RA
U-140PZH3R5	U-140PZH3R8	U-160PZH3R5	U-160PZH3R8	U-160PZH3R5	U-160PZH3R8
14.0 (3.3 - 16.0)	14.0 (3.3 - 16.0)	16.0 (5.4-18.0)	16.0 (5.4-18.0)	16.0 (5.4-18.0)	16.0 (5.4-18.0)
16.0 (3.3 - 18.0)	18.0 (3.3 - 18.0)	18.0 (5.5-20.0)	18.0 (5.5-20.0)	18.0 (5.5-20.0)	18.0 (5.5-20.0)
47,800 (11,300 - 54,600)	47,800 (11,300 - 54,600)	54,600 (18,400-61,400)	54,600 (18,400-61,400)	54,600 (18,400-61,400)	54,600 (18,400-61,400)
54,600 (11,300 - 61,400)	54,600 (11,300 - 61,400)	61,400 (18,800-68,200)	61,400 (18,800-68,200)	61,400 (18,800-68,200)	61,400 (18,800-68,200)
3.37 : 4.10	3.37 : 4.10	3.30 : 3.75	3.30 : 3.75	3.30 : 3.75	3.30 : 3.75
4.04	4.04	3.69	3.69	3.69	3.69
4.15 : 3.90	4.15 : 3.90	4.85 : 4.80	4.85 : 4.80	4.85 : 4.80	4.85 : 4.80
5.05 : 4.86	5.05 : 4.86	4.76 : 5.11	4.76 : 5.11	4.76 : 5.11	4.76 : 5.11
4.56 : 4.36	4.56 : 4.36	4.24 : 4.28	4.24 : 4.28	4.24 : 4.28	4.24 : 4.28
4.71 : 3.86	4.71 : 3.86	4.36 : 3.71	4.36 : 3.71	4.36 : 3.71	4.36 : 3.71
5.60 : 4.84	5.60 : 4.84	5.34 : 5.16	5.34 : 5.16	5.34 : 5.16	5.34 : 5.16
5.90 : 4.54	5.90 : 4.54	5.40 : 4.69	5.40 : 4.69	5.40 : 4.69	5.40 : 4.69
6.44 : 4.14	6.44 : 4.14	5.90 : 4.14	5.90 : 4.14	5.90 : 4.14	5.90 : 4.14
1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
230V 240V	230V 240V	230V 240V	230V 240V	230V 240V	230V 240V
2.61 / 2.47 2.61 / 2.47	2.61 / 2.47 2.61 / 2.47	2.61 / 2.47 2.61 / 2.47	2.61 / 2.47 2.61 / 2.47	2.61 / 2.47 2.61 / 2.47	2.61 / 2.47 2.61 / 2.47
400 X 1,297 X 949	400 X 1,297 X 949	400 X 1,297 X 949	400 X 1,297 X 949	400 X 1,297 X 949	400 X 1,297 X 949
61	61	61	61	61	61
1,000 / 833 / 700 : 1,000 / 833 / 700	1,000 / 833 / 700 : 1,000 / 833 / 700	1,000 / 833 / 700 : 1,000 / 833 / 700	1,000 / 833 / 700 : 1,000 / 833 / 700	1,000 / 833 / 700 : 1,000 / 833 / 700	1,000 / 833 / 700 : 1,000 / 833 / 700
80 (50 -150)	80 (50 -150)	80 (50 -150)	80 (50 -150)	80 (50 -150)	80 (50 -150)
45 / 41 / 37 : 45 / 41 / 37	45 / 41 / 37 : 45 / 41 / 37	45 / 41 / 37 : 45 / 41 / 37	45 / 41 / 37 : 45 / 41 / 37	45 / 41 / 37 : 45 / 41 / 37	45 / 41 / 37 : 45 / 41 / 37
71 / 67 / 63 : 71 / 67 / 63	71 / 67 / 63 : 71 / 67 / 63	71 / 67 / 63 : 71 / 67 / 63	71 / 67 / 63 : 71 / 67 / 63	71 / 67 / 63 : 71 / 67 / 63	71 / 67 / 63 : 71 / 67 / 63
5	5	5	5	5	5
VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
230V 240V	400V 415V	230V 240V	400V 415V	230V 240V	400V 415V
19.8 : 18.6 19.0 : 17.9	6.35 : 6.00 6.15 : 5.75	22.4 : 22.2 21.5 : 21.3	7.80 : 7.70 7.50 : 7.40	22.4 : 22.2 21.5 : 21.3	7.80 : 7.70 7.50 : 7.40
1,416 x 940 x 340	1,416 x 940 x 340	1,500 x 980 x 370	1,500 x 980 x 370	1,500 x 980 x 370	1,500 x 980 x 370
99	99	117	117	117	117
2,150 : 1,933	2,150 : 1,933	2,733 : 2,733	2,733 : 2,733	2,733 : 2,733	2,733 : 2,733
54 : 54	54 : 54	58 : 60	58 : 60	58 : 60	58 : 60
70 : 70	70 : 70	76 : 78	76 : 78	76 : 78	76 : 78
Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø19.05 (3/4)	Ø9.52 (3/8) / Ø19.05 (3/4)	Ø9.52 (3/8) / Ø19.05 (3/4)	Ø9.52 (3/8) / Ø19.05 (3/4)
5 - 85	5 - 85	5 - 100	5 - 100	5 - 100	5 - 100
15, 30	15, 30	30, 30	30, 30	30, 30	30, 30
30	30	30	30	30	30
R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,200 / 45 (g/m)	R32 3,200 / 45 (g/m)	R32 3,200 / 45 (g/m)	R32 3,200 / 45 (g/m)
-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 52 : -20 to 24	-15 to 52 : -20 to 24	-15 to 52 : -20 to 24	-15 to 52 : -20 to 24

14.0kW		
S-125PE4R	S-140PE4R	S-140PE4R
U-125PZ4R8	U-140PZ4R5	U-140PZ4R8
12.5 (3.2 - 13.5)	14.0 (3.3 - 15.0)	14.0 (3.3 - 15.0)
12.5 (3.3 - 15.0)	14.0 (3.5 - 16.0)	14.0 (3.5 - 16.0)
42,700 (10,900 - 46,100)	47,800 (11,300 - 51,200)	47,800 (11,300 - 51,200)
42,700 (11,300 - 51,200)	47,800 (11,800 - 54,600)	47,800 (11,800 - 54,600)
3.55 : 4.31	3.25 : 3.98	3.25 : 3.98
4.22	3.91	3.91
3.52 : 2.90	4.31 : 3.52	4.31 : 3.52
5.05 : 5.12	4.48 : 4.75	4.48 : 4.75
4.54 : 4.56	4.12 : 4.23	4.12 : 4.23
4.63 : 4.09	4.20 : 3.77	4.20 : 3.77
5.56 : 5.13	4.87 : 4.75	4.87 : 4.75
5.86 : 4.81	5.20 : 4.45	5.20 : 4.45
6.32 : 4.40	5.58 : 4.06	5.58 : 4.06
1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
230V 240V	230V 240V	230V 240V
400 x 1,297 x 949	400 x 1,297 x 949	400 x 1,297 x 949
61	61	61
833 / 766 / 600 : 833 / 766 / 600	1,000 / 833 / 700 : 1,000 / 833 / 700	1,000 / 833 / 700 : 1,000 / 833 / 700
80 (10 - 150)	80 (50 - 150)	80 (50 - 150)
42 / 39 / 34 : 42 / 39 / 34	45 / 41 / 37 : 45 / 41 / 37	45 / 41 / 37 : 45 / 41 / 37
68 / 65 / 60 : 68 / 65 / 60	71 / 67 / 63 : 71 / 67 / 63	71 / 67 / 63 : 71 / 67 / 63
5	5	5
VP-25	VP-25	VP-25
3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
400V 415V	230V 240V	400V 415V
5.40 : 4.45 5.20 : 4.30	20.6 : 16.8 19.7 : 16.1	6.60 : 5.40 6.40 : 5.20
996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
82	83	82
1,366 : 1,333	1,400 : 1,366	1,400 : 1,366
56 : 55	56 : 56	56 : 56
73 : 73	74 : 74	74 : 74
Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)	Ø9.52 (3/8) / Ø15.88 (5/8)
5 - 50	5 - 50	5 - 50
15, 30	15, 30	15, 30
30	30	30
R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)
-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Notes:

- In the case of nance X OFF
- In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
- AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
- TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
- Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions.

Indoor Unit

High Static Pressure

Splittable Ducted

High static and large airflow ducted for exceptional installation flexibility.

nanoeTMX
Generator Mark3
nanoeTMX as a standard



Self-diagnosing
Function



Automatic
Fan
Operation



Dry Mode



Automatic
Restart
Function



DC Motor

Technical focus

- Easy installation with splittable chassis design
- Max. 200Pa static pressure setting^{*1}
- Design flexibility thanks to high static pressure and large air volume
- DC motor equipped
- Low power input
- Accurate temperature control to reduce cold drafts during operation
- Configurable air temperature control

^{*1} In case of S-224PE4R

New Ducted Model Key Factors



Bell Shaped Keyhole for Weight Support

Part of the keyhole is newly designed with a bell shape to reduce the burden of installation. It also enables temporary attachment.




2 Wire Connectors for Easy Installation

With only 2 wire connectors, installation has become much easier and faster.



12 Bolts & Screws for Easy Assembly

Only 12 screws and bolts need to be attached, allowing for a shorter installation time.

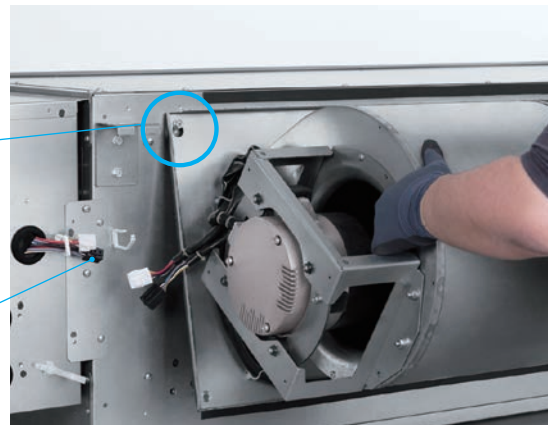

Easy Assembly Steps

Assembly takes three easy steps, even in limited spaces.



Note: Above images are for the 22.4kW model.

PE Series



Dimensions



S-180PE4R
S-200PE4R
S-224PE4R



CZ-RTC6WBL*¹
CZ-RTC6WBLW2*¹



CZ-RTC6WZ2*^{1*2}



CZ-RTC5B



CZ-RTC4A



CZ-CAPWFC2

*1 Black models are also available.
*2 Zone Controller for residential use.
Note: Product image not to scale.

Specifications of R32 Deluxe Model **R32**

Capacity				18.0kW		20.0kW		22.4kW				
Model Name		Indoor Unit		S-180PE4R		S-180PE4R		S-200PE4R		S-224PE4R		
		Outdoor Unit		U-180PZH3R5		U-180PZH3R8		U-200PZH3R8		U-224PZH3R8		
Cooling Capacity : Heating Capacity		kW	18.0 (5.5-20.0) 20.0 (5.5-22.4)		18.0 (5.5-20.0) 20.0 (5.5-22.4)		20.0 (5.7-22.4) 22.4 (5.0-25.0)		22.4 (5.7-25.0) 25.0 (4.9-28.0)			
			BTU/h		61,400 (18,800-68,200) 68,200 (18,800-76,400)		61,400 (18,800-68,200) 68,200 (18,800-76,400)		68,200 (19,400-76,400) 76,400 (17,100-85,300)		76,400 (19,400-85,300) 85,300 (16,700-95,500)	
EER : COP		W/W	3.20 : 3.75		3.20 : 3.75		3.33 : 3.67		3.09 : 3.52			
COP@H2 condition		W/W	2.9		2.9		2.7		2.6			
Total power input		Cooling : Heating	kW	5.63 : 5.33		5.63 : 5.33		6.00 : 6.10		7.24 : 7.10		
TCSPF : HSPF		Residential	Hot Climate	4.33 : 4.95		4.33 : 4.95		4.33 : 4.42		4.00 : 4.55		
			Average Climate	3.93 : 4.24		3.93 : 4.24		3.97 : 3.90		3.69 : 3.87		
			Cold Climate	4.03 : 3.72		4.03 : 3.72		4.05 : 3.45		3.79 : 3.38		
		Commercial	Hot Climate	4.73 : 4.99		4.73 : 4.99		4.65 : 4.44		4.27 : 4.68		
			Average Climate	4.76 : 4.58		4.76 : 4.58		4.71 : 4.14		4.31 : 4.29		
			Cold Climate	5.12 : 4.10		5.12 : 4.10		5.01 : 3.74		4.57 : 3.78		
Indoor Unit												
Power source		Phase/Hz		1 Phase / 50Hz		1 Phase / 50Hz		1 Phase/ 50Hz		1 Phase / 50Hz		
		V		230V 240V		230V 240V		230V 240V		230V 240V		
Current (rated)		Cooling : Heating	3.30 : 3.30 3.20 : 3.20		3.30 : 3.30 3.20 : 3.20		3.40 : 3.40 3.30 : 3.30		4.20 : 4.20 4.10 : 4.10			
Dimension		H x W x D	Indoor	mm		486 x 1456 x 916		486 x 1456 x 916		486 x 1,456 x 916		
Net Weight		Indoor	kg		82		82		83		87	
Air volume (H/M/L)		Cooling : Heating	L/s		1,202 / 1,052 / 885 : 1,202 / 1,052 / 885		1,202 / 1,052 / 885 : 1,202 / 1,052 / 885		1,202 / 1,052 / 885 : 1,202 / 1,052 / 885		1,402 / 1,202 / 985 : 1,402 / 1,202 / 985	
External static pressure		Pa		60 (100 / 150)		60 (100 / 150)		75 (120 / 180)		75 (130 / 200)		
Sound Pressure Level (H/M/L)		Cooling : Heating	dB(A)		46 / 44 / 41 : 46 / 44 / 41		46 / 44 / 41 : 46 / 44 / 41		46 / 44 / 41 : 46 / 44 / 41		47 / 45 / 42 : 47 / 45 / 42	
Sound Power Level (H/M/L)		Cooling : Heating	dB		78 / 76 / 73 : 78 / 76 / 73		78 / 76 / 73 : 78 / 76 / 73		78 / 76 / 73 : 78 / 76 / 73		79 / 77 / 74 : 79 / 77 / 74	
Number of fan speeds				3		3		3		3		
Drain piping		mm		VP-25		VP-25		VP-25		VP-25		
Outdoor												
Power source		Phase/Hz		1 Phase / 50Hz		3 Phase / 50Hz		3 Phase / 50Hz		3 Phase / 50Hz		
		V		230V 240V		400V 415V		400V 415V		400V 415V		
Current (rated)		Cooling : Heating	A		23.3 : 21.9 22.3 : 21.0		8.00 : 7.50 7.70 : 7.25		8.45 : 8.60 8.15 : 8.30		9.95 : 9.75 9.60 : 9.40	
Dimension		H x W x D	mm		1,500 x 980 x 370		1,500 x 980 x 370		1,500 x 980 x 370		1,500 x 980 x 370	
Net weight		kg		117		115		127		127		
Air volume		Cooling : Heating	L/s		2,738 : 2,738		2,738 : 2,738		2,672 : 2,672		2,672 : 2,672	
Sound Pressure Level (Silent mode)		Cooling : Heating	dB(A)		58 : 60		58 : 60		58 : 62		58 : 62	
Sound Power Level (Silent mode)		Cooling : Heating	dB		76 : 78		76 : 78		77 : 81		77 : 81	
Piping Connection		Liquid / Gas	mm		Ø9.52 / Ø19.05		Ø9.52 / Ø19.05		Ø12.7 / Ø19.05		Ø12.7 / Ø19.05	
Pipe Length range		min. - max.	m		5 - 100		5 - 100		5 - 100		5 - 100	
Elevation Difference (OU located lower, OU located higher)		m		30, 30		30, 30		30, 30		30, 30		
Maximum Chargeless length		m		30		30		30		30		
Refrigerant at shipping / Additional gas amount		g		R32 3,400 / 76.0 (g/m)		R32 3,400 / 76.0 (g/m)		R32 5,200 / 108.0 (g/m)		R32 5,200 / 80 (g/m)		
Operation Ranges		Cooling : Heating	°C		-15 to 46 : -20 to 24		-15 to 52 : -20 to 24		-15 to 52 : -20 to 24		-15 to 46 : -20 to 24	

Notes:

- In the case of nanoe X OFF
- In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
- AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
- TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
- Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions

*1 For U-160PZH3R8 *2 For U-180PZH3R8


Indoor Unit

High Static Pressure

Adaptive Ducted

Control all aspects of your environment with exceptional performance and quiet operation. Vertical installation flexibility offers the perfect solution when ceiling heights are restricted.

nanoe™ X
Generator Mark2
 nanoe™ X as a standard





Technical focus

- Space saving 250mm height
- DC fan motor for variable external static pressure control
- Easy to install and maintain
- Accurate temperature control to reduce cold drafts during operation
- Configurable air temperature control

Powerful 150Pa ESP in an industry-leading vertical installation

Our groundbreaking drain pan design delivers a ducted unit that can be mounted horizontally or vertically without the need for alterations^{*1}. Even when ceiling space for ductwork is limited, the slim design and powerful 150Pa static pressure allow for discrete placement away from rooms for total installation flexibility.


^{*1} Please refer to Installation Manual for full details.

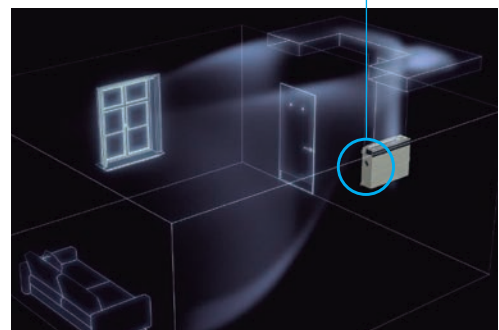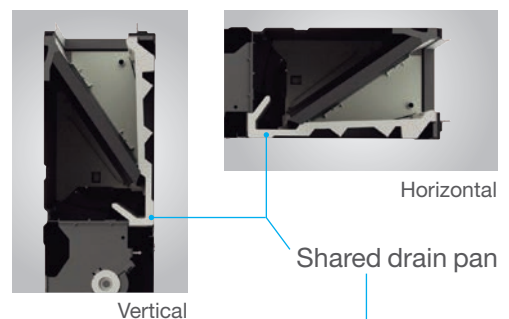


Drain pan is shared in both cases horizontal and vertical installation.

Selectable air inlet position

A removable panel allows air inlet position to be adjusted to enable rear or bottom entry, depending on ductwork installation.

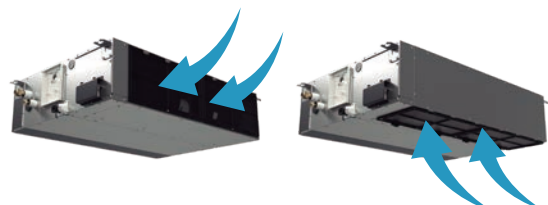

Note: PF3 range only.

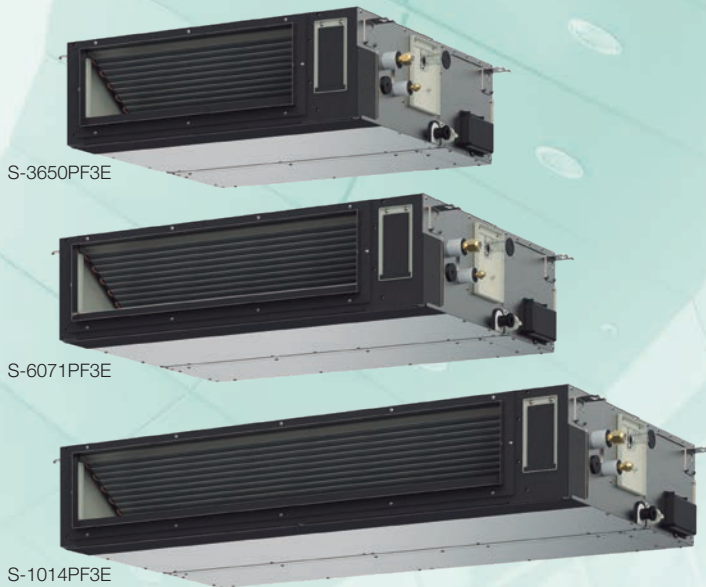


*1 Black models are also available.
*2 Zone Controller for residential use.
Note: Product image not to scale.



Built-in Drain pump (DC motor pump)

Space saving height of 250mm for all models



250mm standardised height provides easy and uniform installation for models with different capacities, especially when ceiling heights are restricted.

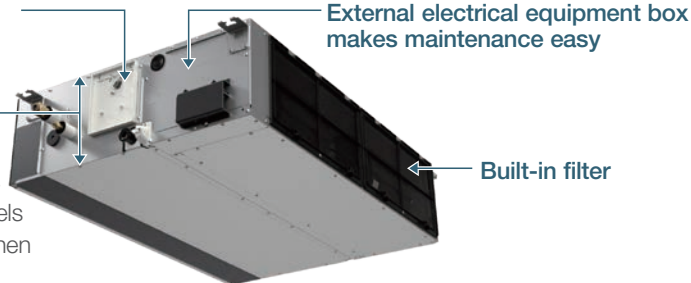

Top-class noise level performance

A proprietary improved casing design realises an even smoother airflow and low noise (22dB - 29dB) operation while effortlessly maintaining enough pressure*2 to deliver quiet comfort ideal for hotel and guest rooms.

*2 Operating at 50Pa static pressure in Low fan mode.

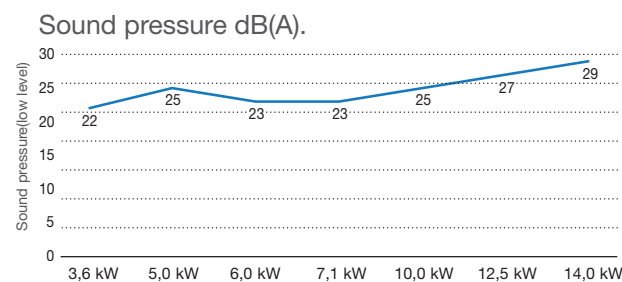


Note: Silent operation in full rated capacity.

Superior air quality



The new ducted models are equipped with nanoe™ X as standard, a unique air quality improvement technology producing twice the amount of hydroxyl radicals compared to previous generations. Combined with the strong static pressure this ensures pristine nanoe™ X air travels unaffected even through multiple duct shapes at lengths of 10m, as well as making them ideal for use in larger spaces.

Note: PF3 and PE4 ranges only.

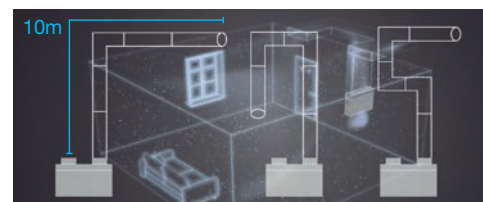

Based on in-house test result, even with a total ductwork length up to 10m, effectiveness of nanoe™ X is maintained.

Indoor Unit: **High Static Pressure** Adaptive Ducted

Specifications of R32 Deluxe Model

R32
REFRIGERANT

Capacity			6.8kW	9.5kW	12.1kW
Model Name	Indoor Unit		S-6071PF3E	S-1014PF3E	S-1014PF3E
	Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-125PZH3R5
Cooling capacity : Heating capacity	kW		6.8 (2.2 - 7.8) 7.5 (2.0 - 9.0)	9.5 (3.1 - 11.4) 10.8 (3.1 - 13.5)	9.5 (3.1 - 11.4) 10.8 (3.1 - 13.5)
		BTU/h	23,200 (7,500 - 26,600) 25,600 (6,800 - 30,700)	32,400 (10,600 - 38,900) 36,800 (10,600 - 46,100)	32,400 (10,600 - 38,900) 36,800 (10,600 - 46,100)
EER : COP		W/W	3.74 : 4.03	4.17 : 3.97	4.17 : 3.97
COP@H2 condition		W/W	2.96	2.90	2.60
Total power input	Cooling : Heating	kW	1.82 : 1.86	2.28 : 2.72	2.28 : 2.72
TCSPF : HSPF	Residential	Hot Climate	5.40 : 5.49	5.93 : 5.57	5.93 : 5.57
		Average Climate	4.75 : 4.67	5.21 : 4.70	5.21 : 4.70
		Cold Climate	4.82 : 4.13	5.29 : 4.21	5.29 : 4.21
	Commercial	Hot Climate	6.02 : 5.54	6.59 : 5.61	6.59 : 5.61
		Average Climate	6.25 : 5.08	6.75 : 5.13	6.75 : 5.13
		Cold Climate	6.76 : 4.56	7.28 : 4.65	7.28 : 4.65
Indoor Unit					
Power source		Phase/Hz V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V
Dimension	H x W x D	Indoor	mm 250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730
Net weight		Indoor	kg 30	39	39
Air volume (H/M/L)	Cooling : Heating	L/s	350 / 317 / 250 : 350 / 317 / 250	534 / 434 / 350 : 534 / 434 / 350	534 / 434 / 350 : 534 / 434 / 350
External static pressure		Pa	30 (10 - 150)	40 (10 - 150)	50 (10 - 150)
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	30 / 26 / 23 : 30 / 26 / 23	33 / 29 / 25 : 33 / 29 / 25	33 / 29 / 25 : 33 / 29 / 25
Sound power level (H/M/L)	Cooling : Heating	dB	53 / 49 / 46 : 53 / 49 / 46	56 / 52 / 48 : 56 / 52 / 48	56 / 52 / 48 : 56 / 52 / 48
Number of fan speeds			5	5	5
Drain piping		mm	VP-20	VP-20	VP-20
Outdoor Unit					
Power source		Phase/Hz V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	3 Phase / 50Hz 400V 415V
Current (rated)	Cooling : Heating	A	8.60 : 8.60 8.25 : 8.35	10.8 : 12.7 10.3 : 12.2	3.60 : 4.30 3.50 : 4.15
Dimensions	H x W x D	mm	996 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340
Net weight		kg	66	99	99
Air volume	Cooling : Heating	L/s	1,018 : 1,002	1,970 : 1,803	1,970 : 1,803
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)
Sound power level (Silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)
Piping connections	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	5 - 50	5 - 85	5 - 85
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30
Maximum chargeless length		m	30	30	30
Refrigerant at shipping / Additional gas amount		g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)
Operation ranges	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

Specifications of R32 Compact Model

R32
REFRIGERANT

Capacity			3.4kW	4.6kW	5.7kW	6.8kW
Model Name	Indoor Unit		S-3650PF3E	S-3650PF3E	S-6071PF3E	S-6071PF3E
	Outdoor Unit		U-36PZ3R5	U-50PZ3R5	U-60PZ4R5	U-71PZ4R5
Cooling capacity : Heating capacity	kW		3.4 (1.3 - 4.0) 3.6 (1.3 - 4.6)	4.6 (1.5 - 5.3) 5.0 (1.5 - 5.9)	5.7 (2.0 - 6.3) 5.7 (1.8 - 7.0)	6.8 (2.6 - 7.7) 6.8 (2.2 - 8.1)
		BTU/h	11,600 (4,400 - 13,600) 12,300 (4,400 - 15,700)	15,700 (5,100 - 18,100) 17,100 (5,100 - 20,100)	19,400 (6,800 - 21,500) 19,400 (6,100 - 23,900)	23,200 (8,900 - 26,300) 23,200 (7,500 - 27,600)
EER : COP		W/W	3.78 : 4.29	3.19 : 3.62	3.45 : 4.04	3.33 : 4.15
COP@H2 condition		W/W	3.09	3.33	3.97	4.08
Total power input	Cooling : Heating	kW	0.900 : 0.840	1.44 : 1.38	1.65 : 1.41	2.04 : 1.64
TCSPF : HSPF	Residential	Hot Climate	5.11 : 5.05	4.67 : 5.09	5.06 : 5.64	4.84 : 5.42
		Average Climate	4.36 : 4.57	4.23 : 4.31	4.60 : 4.71	4.44 : 4.58
		Cold Climate	4.36 : 4.06	4.29 : 3.79	4.72 : 4.06	4.58 : 3.93
	Commercial	Hot Climate	5.77 : 5.01	5.22 : 5.13	5.56 : 5.69	5.30 : 5.47
		Average Climate	5.84 : 4.72	5.96 : 4.69	6.01 : 5.16	5.70 : 4.99
		Cold Climate	6.41 : 4.31	6.69 : 4.19	6.56 : 4.54	6.25 : 4.38
Indoor Unit						
Power source		Phase/Hz V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V
Dimensions	H x W x D	Indoor	mm 250 x 800 x 730	250 x 800 x 730	250 x 1,000 x 730	250 x 1,000 x 730
Net weight		Indoor	kg 25	25	30	30
Air volume (H/M/L)	Cooling : Heating	L/s	233 / 217 / 167 : 233 / 217 / 167	267 / 250 / 200 : 267 / 250 / 200	350 / 316 / 250 : 350 / 316 / 250	350 / 316 / 250 : 350 / 316 / 250
External static pressure		Pa	30 (10 - 150)	30 (10 - 150)	30 (10 - 150)	30 (10 - 150)
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	30 / 27 / 22 : 30 / 27 / 22	34 / 30 / 25 : 34 / 30 / 25	30 / 26 / 23 : 30 / 26 / 23	30 / 26 / 23 : 30 / 26 / 23
Sound power level (H/M/L)	Cooling : Heating	dB	53 / 50 / 45 : 53 / 50 / 45	57 / 53 / 48 : 57 / 53 / 48	53 / 49 / 46 : 53 / 49 / 46	53 / 49 / 46 : 53 / 49 / 46
Number of fan speeds			5	5	5	5
Drain piping		mm	VP-20	VP-20	VP-20	VP-20
Outdoor Unit						
Power source		Phase/Hz V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V
Current (rated)	Cooling : Heating	A	4.00 : 3.80 3.85 : 3.55	6.40 : 6.20 6.10 : 5.95	7.25 : 6.20 6.95 : 5.95	8.95 : 7.20 8.60 : 6.90
Dimensions	H x W x D	mm	619 x 824 x 299	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320
Net weight		kg	31	35	35	45
Air volume	Cooling : Heating	L/s	561 : 567	546 : 532	566 : 550	750 : 766
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 49 (47)	48 (46) : 49 (47)	47 : 47	47 : 49
Sound power level (Silent mode)	Cooling : Heating	dB	66 (64) : 67 (65)	66 (64) : 67 (65)	65 : 65	65 : 67
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	3 - 20	3 - 30	3 - 30	3 - 30
Elevation difference (OU located lower, OU located higher)		m	15, 15	15, 15	15, 15	20, 20
Maximum chargeless length		m	7.5	10	10	10
Refrigerant at shipping, Additional gas amount		g	R32 870 / 10 (g/m)	R32 1,140 / 15 (g/m)	R32 1,220 / 15 (g/m)	R32 1,350 / 25 (g/m)
Operating range	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

13.4kW			
S-1014PF3E	S-1014PF3E	S-1014PF3E	
U-125PZH3R8	U-140PZH3R5	U-140PZH3R8	
12.1 (3.2 - 13.6) 13.5 (3.2 - 15.4)	13.4 (3.3 - 15.3) 15.5 (3.3 - 17.4)	13.4 (3.3 - 15.3) 15.5 (3.3 - 17.4)	
41,300 (10,900 - 46,400) 46,100 (10,900 - 52,500)	45,700 (11,300 - 52,200) 52,900 (11,300 - 59,400)	45,700 (11,300 - 52,200) 52,900 (11,300 - 59,400)	
3.58 : 3.46	3.38 : 3.44	3.38 : 3.44	
2.60	2.68	2.68	
3.38 : 3.90	3.96 : 4.51	3.96 : 4.51	
5.37 : 5.32	4.98 : 4.97	4.98 : 4.97	
4.86 : 4.32	4.55 : 4.15	4.55 : 4.15	
5.03 : 3.79	4.72 : 3.65	4.72 : 3.65	
5.95 : 5.44	5.49 : 5.05	5.49 : 5.05	
6.30 : 4.87	5.74 : 4.58	5.74 : 4.58	
6.88 : 4.31	6.25 : 4.08	6.25 : 4.08	
1 Phase / 50Hz 230V 240V 250 X 1,400 X 730 39 567 / 484 / 384 : 567 / 484 / 384 50 (10 - 150) 35 / 31 / 27 : 35 / 31 / 27 58 / 54 / 50 : 58 / 54 / 50 5 VP-20	1 Phase / 50Hz 230V 240V 250 X 1,400 X 730 39 601 / 534 / 417 : 601 / 534 / 417 50 (10 - 150) 39 / 35 / 29 : 39 / 35 / 29 62 / 58 / 52 : 62 / 58 / 52 5 VP-20	1 Phase / 50Hz 230V 240V 250 X 1,400 X 730 39 601 / 534 / 417 : 601 / 534 / 417 50 (10 - 150) 39 / 35 / 29 : 39 / 35 / 29 62 / 58 / 52 : 62 / 58 / 52 5 VP-20	
3 Phase / 50Hz 400V 415V 5.30 : 6.10 5.15 : 5.90 1,416 x 940 x 340 99 2,087 : 1,870 53 (51) : 53 (51) 69 (67) : 69 (67) Ø9.52 / Ø15.88 5 - 85 15, 30 30 R32 3,050 / 45 (g/m) -15 to 48 : -20 to 24	1 Phase / 50Hz 230V 240V 18.7 : 21.1 17.9 : 20.2 1,416 x 940 x 340 99 2,154 : 1,937 54 (52) : 54 (52) 70 (68) : 70 (68) Ø9.52 / Ø15.88 5 - 85 15, 30 30 R32 3,050 / 45 (g/m) -15 to 48 : -20 to 24	3 Phase / 50Hz 400V 415V 6.30 : 7.15 6.05 : 6.90 1,416 x 940 x 340 99 2,154 : 1,937 54 (52) : 54 (52) 70 (68) : 70 (68) Ø9.52 / Ø15.88 5 - 85 15, 30 30 R32 3,050 / 45 (g/m) -15 to 48 : -20 to 24	

Notes:

- In the case of standard installation (Horizontal installation in the ceiling, rear side air intake)
- In the case of nanoe X OFF
- In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
- AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
- TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
- Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- H : High at setting 5 stage (Level 5), M : Middle at setting 5 stage (Level 3), L : Low at setting 5 stage (Level 1) Noise of L is indicated by the values at FAN mode.

*1 For piping connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

*2 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

9.5kW		12.1kW		13.4kW	
S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E
U-100PZ4R5	U-100PZ4R8	U-125PZ4R5	U-125PZ4R8	U-140PZ4R5	U-140PZ4R8
9.5 (3.0 - 11.0) 9.5 (2.5 - 12.0)	9.5 (3.0 - 11.4) 9.5 (3.0 - 13.5)	12.1 (3.4 - 13.5) 12.1 (3.1 - 15.0)	12.1 (3.4 - 13.5) 12.1 (3.1 - 15.0)	13.4 (3.2 - 15.0) 13.4 (3.5 - 16.0)	13.4 (3.2 - 15.0) 13.4 (3.5 - 16.0)
32,400 (10,200 - 37,500) 32,400 (8,500 - 40,900)	32,400 (10,200 - 38,900) 32,400 (10,200 - 46,100)	41,300 (11,400 - 46,100) 41,300 (10,400 - 51,200)	41,300 (11,400 - 46,100) 41,300 (10,400 - 51,200)	45,700 (10,900 - 51,200) 45,700 (11,900 - 54,600)	45,700 (10,900 - 51,200) 45,700 (11,900 - 54,600)
3.57 : 4.09 4.01	3.57 : 4.09 3.98	3.40 : 3.56 3.49	3.40 : 3.56 3.49	3.35 : 3.76 3.70	3.35 : 3.76 3.70
2.66 : 2.32	2.66 : 2.32	3.56 : 3.40	3.56 : 3.40	4.00 : 3.56	4.00 : 3.56
5.12 : 5.33	5.23 : 5.04	4.96 : 5.10	4.96 : 5.10	4.67 : 5.21	4.67 : 5.21
4.59 : 4.53	4.51 : 4.52	4.49 : 4.22	4.49 : 4.22	4.27 : 4.32	4.27 : 4.32
4.68 : 3.96	4.62 : 4.05	4.57 : 3.68	4.57 : 3.68	4.35 : 3.75	4.35 : 3.75
5.63 : 5.42	5.86 : 4.99	5.52 : 5.20	5.52 : 5.20	5.15 : 5.33	5.15 : 5.33
5.89 : 4.97	5.91 : 4.68	6.13 : 4.70	6.13 : 4.70	5.60 : 4.83	5.60 : 4.83
6.35 : 4.40	6.48 : 4.31	6.80 : 4.15	6.80 : 4.15	6.19 : 4.23	6.19 : 4.23
1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 533 / 433 / 350 : 533 / 433 / 350 40 (10 - 150) 33 / 29 / 25 : 33 / 29 / 25 56 / 52 / 48 : 56 / 52 / 48 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 533 / 433 / 350 : 533 / 433 / 350 40 (10 - 150) 33 / 29 / 25 : 33 / 29 / 25 56 / 52 / 48 : 56 / 52 / 48 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 566 / 483 / 383 : 566 / 483 / 383 50 (10 - 150) 35 / 31 / 27 : 35 / 31 / 27 58 / 54 / 50 : 58 / 54 / 50 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 566 / 483 / 383 : 566 / 483 / 383 50 (10 - 150) 35 / 31 / 27 : 35 / 31 / 27 58 / 54 / 50 : 58 / 54 / 50 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 600 / 533 / 416 : 600 / 533 / 416 50 (10 - 150) 39 / 35 / 29 : 39 / 35 / 29 62 / 58 / 52 : 62 / 58 / 52 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 600 / 533 / 416 : 600 / 533 / 416 50 (10 - 150) 39 / 35 / 29 : 39 / 35 / 29 62 / 58 / 52 : 62 / 58 / 52 5 VP-20
1 Phase / 50Hz 230V 240V 11.7 : 10.2 11.2 : 9.75 795 x 875 x 320 55 933 : 883 54 : 54 72 : 72 Ø9.52 / Ø15.88 3 - 30 20, 20 10 R32 1,930 / 25 (g/m) -10 to 46 : -15 to 24	3 Phase / 50Hz 400V 415V 4.20 : 3.70 4.05 : 3.55 996 x 980 x 370 80 1,216 : 1,216 52 : 52 70 : 70 Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,400 / 45 (g/m) -10 to 46 : -15 to 24	1 Phase / 50Hz 230V 240V 16.5 : 15.7 15.8 : 15.1 996 x 980 x 370 83 1,366 : 1,333 55 : 55 73 : 73 Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,800 / 45 (g/m) -10 to 46 : -15 to 24	3 Phase / 50Hz 400V 415V 5.45 : 5.20 5.25 : 5.05 996 x 980 x 370 82 1,366 : 1,333 55 : 55 73 : 73 Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,800 / 45 (g/m) -10 to 46 : -15 to 24	1 Phase / 50Hz 230V 240V 18.5 : 16.5 17.7 : 15.8 996 x 980 x 370 83 1,400 : 1,366 56 : 56 74 : 74 Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,800 / 45 (g/m) -10 to 46 : -15 to 24	3 Phase / 50Hz 400V 415V 6.15 : 5.45 5.90 : 5.25 996 x 980 x 370 82 1,400 : 1,366 56 : 56 74 : 74 Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,800 / 45 (g/m) -10 to 46 : -15 to 24

Indoor Unit Ultra Slim Ducted

With a height of only 200 mm, it provides greater flexibility and adaptability for various applications. In addition, high efficiency and extreme low noise level make it highly suitable for apartments and hotels.



Technical focus

- Space saving 200mm height
- Rear or Bottom Return Air Options
- Built-in Drain Pump
- DC fan motor greatly reduces power consumption
- Easy maintenance and service by external electrical box
- 40 Pa static pressure enables ductwork to be fitted.


Ultra-slim profile for all models

200mm height for all models allows installation in very narrow ceilings.



Drain pump with increased power

Using the built-in high-lift drain pump, the drain piping rise height can be increased to 653 mm from the lower surface of the body.

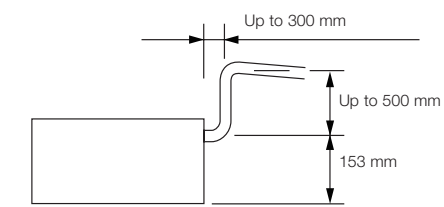

UD3 Series



Dimensions



CS-Z25UD3RAW
CS-Z35UD3RAW
CS-Z50UD3RAW
CS-Z60UD3RAW



Wired remote controller included.



CZ-TACG1*1

Note: Product image not to scale.

Specifications

Capacity		2.5KW	3.6KW	5.0KW	6.0KW
model Name	Indoor Unit	CS-Z25UD3RAW	CS-Z35UD3RAW	CS-Z50UD3RAW	CS-Z60UD3RAW
	Outdoor Unit	CU-Z25UBRA	CU-Z35UBRA	CU-Z50UBRA	CU-Z60UBRA
Cooling capacity : Heating capacity	kW	2.60 (0.85 - 3.20) 3.30 (0.85 - 4.90)	3.70 (0.85 - 4.00) 4.20 (0.85 - 5.60)	5.00 (0.90 - 5.70) 6.10 (0.90 - 7.20)	5.60 (0.90 - 6.50) 7.00 (0.90 - 8.00)
	BTU/h	8,870 (2,900 - 10,900) 11,300 (2,900 - 16,700)	12,600 (2,900 - 13,600) 14,300 (2,900 - 19,100)	17,100 (3,070 - 19,400) 20,800 (3,070 - 24,600)	19,100 (3,070 - 22,200) 23,900 (3,070 - 27,300)
EER : COP	W/W	4.48 : 4.23	3.85 : 4.08	3.57 : 3.63	3.29 : 3.24
Power input (min - max)	Cooling : Heating kW	0.58 (0.24 - 0.85) : 0.78 (0.23 - 1.25)	0.96 (0.24 - 1.12) : 1.03 (0.23 - 1.57)	1.40 (0.26 - 1.78) : 1.68 (0.26 - 2.20)	1.70 (0.26 - 2.30) : 2.16 (0.26 - 2.60)
Indoor Unit					
Power source	Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
	V	230V 240V	230V 240V	230V 240V	230V 240V
Dimensions	H x W x D mm	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640
Net weight	kg	19	19	19	19
Air volume	Cooling : Heating L/s	175 : 175	187 : 187	255 : 255	262 : 262
Sound pressure level (H/M/L)	Cooling : Heating dB(A)	33 / 27 / 24 : 34 / 27 / 24	33 / 26 / 23 : 35 / 27 / 24	39 / 29 / 26 : 39 / 30 / 27	41 / 30 / 27 : 41 / 32 / 29
Sound power level (H/M/L)	Cooling : Heating dB(A)	49 / 43 / 40 : 50 / 43 / 40	49 / 42 / 39 : 51 / 43 / 40	55 / 45 / 42 : 55 / 46 / 43	57 / 46 / 43 : 57 / 48 / 45
Outdoor Unit					
Power source	Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
	V	230V 240V	230V 240V	230V 240V	230V 240V
Current (rated)	Cooling : Heating A	2.80 : 3.50 2.70 : 3.40	4.30 : 4.70 4.20 : 4.50	6.30 : 7.40 6.10 : 7.20	7.50 : 9.50 7.30 : 9.30
Dimensions	H x W x D mm	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320
Net weight	kg	33	35	42	43
Piping connections	Liquid / Gas mm	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø12.70	Ø6.35 / Ø12.70
Pipe length	min. - max. m	3 - 20	3 - 20	3 - 30	3 - 30
Elevation difference	m	15	15	20	20
Operation ranges	Cooling : Heating °C	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24	-10 ~ +46 : -15 ~ +24

Notes:

The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823

- Cooling: Indoor temperature: 27°C DB/ 19°C WB, Outdoor temperature: 35°C DB/ 24°C WB
- Heating: Indoor temperature: 20°C DB/ 15°C WB, Outdoor temperature: 7°C DB/ 6°C WB
- Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- Sound levels are measured in default status which is rear return air, when changing to bottom return air, sounds levels may be higher.
- Ultra Slim Ducted is not supported by PAC Smart Connectivity+.

*1 If you connect WLAN adaptor (CZ-TACG1) to an indoor unit other than wall mounted type and operate from the smartphone with Panasonic Comfort Cloud App, airflow direction may not be operated as it is shown on the display.

Indoor Unit


4-WAY Cassette

Featuring uniform cooling, easy installation, and with a sleek exterior, this unit is the perfect match for all commercial applications.

nanoe™ X

Generator Mark1

nanoe™ X as a standard



Technical focus


- Compact design
- Low sound levels
- DC fan motor for increased efficiency
- Powerful drain pump gives 850 mm lift
- Lightweight design
- Fresh air knockout
- Branch duct connection
- Optional air-intake plenum CZ-FDU3

360° Wide & Comfortable Airflow

Our design features wide-angle outlets and flaps that were designed through expert mechanics and prototype tests. Air from the centre is sent farther and the air blown out of the larger, side flaps spreads throughout the room. The air comes from all four sides of the unit and expands gently in a circle centred on the indoor unit.

Ample airflow: 600 l/s
Industry's leading in the 140PU class.

Comfort/Quiet

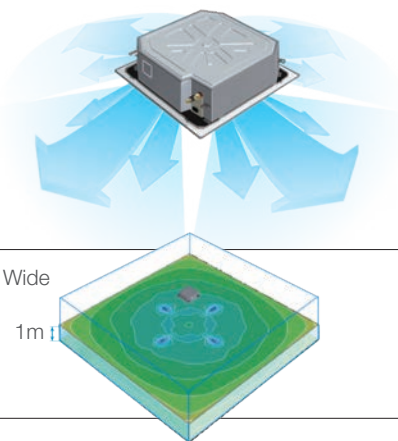

Temperature distribution by thermograph (cooling operation)

Simulation conditions:
P140 4-WAY Ceiling Mounted Cassette type in cooling mode
/ Floor area of 225 m²/ Ceiling height of 3 m



360° Wide

1m

Wide Flap



Adding a sub flap and widening the main flap have reduced turbulence and increased airflow. Also, setting the jetting port at a wider angle allows the airflow to reach the corners of the room more quickly.

Conventional



Airflow turbulence is generated

New Model



Airflow turbulence is reduced

3D Turbo Fan

Using a twisted 3D blade made the unit slimmer and more compact, while also increasing the airflow. A 5-Speed mode allows the airflow to be adjusted in 5 steps to suit the situation.

Conventional



5 Speed Mode^{*1}



New Model



Airflow increased 9.5%^{*2}

^{*1} 5 level fan mode: Except for CZ-RTC4A
^{*2} Panasonic in-house data



S-6071PU3E
S-1014PU3E

AIR INTAKE CHAMBER



- 1 Air intake flange (ø100) (field supply).
 - 2 Air intake box CZ-ATU2*1 for Air intake plenum.
 - 3 Air intake plenum CZ-FDU3
- *1 When using Air intake box (CZ-ATU2), Air intake plenum (CZ-FDU3) required.

PANEL (CZ-KPU3H)



Normal Panel : CZ-KPU3H

6071PU



Dimensions

1014PU



Dimensions



CZ-RTC6WBL*2
CZ-RTC6WBLW2*2



CZ-RTC5B



CZ-RTC4A



CZ-CAPWFC2

*2 Black models are also available.
Note: Product image not to scale.

High-Ceiling Installation (Up to 5 m for 10.0kW+ models)

The units can be installed in rooms with high ceilings, where they provide ample floor-level heating in the winter. (See ceiling height guidelines below.)

High Ceiling (Factory settings)				
New model	Up to 3.0m		Up to 3.6m	
	Capacity		Capacity	
	6071PU		1014PU	

1014PU	Up to 5.0m		Up to 4.7m	Up to 5.0m
	Capacity		Capacity	Capacity
	4-way discharge high ceiling setting 2		3-way discharge with the optional air-blocking materials	2-way discharge with the optional air-blocking materials

Ceiling height guidelines

Indoor unit	*3 settings	4-way discharge			3-way discharge (optional air-blocking materials)	2-way discharge (optional air-blocking materials) *4
		Standard (Factory setting)	High ceiling setting 1	High ceiling setting 2		
6071PU		3.0	3.3	3.6	3.8	4.2
1014PU		3.6	4.3	5.0	4.7	5.0

*3 When using the unit in a configuration other than the factory settings, it is necessary to make settings on site to increase airflow.

*4 Use air-blocking materials (CZ-CFU3) to completely block two discharge outlets for 2-way airflow.

Indoor Unit: 4-WAY Cassette

Specifications of R32 Deluxe Model

R32
REFRIGERANT

Capacity			7.1kW	10.0kW
Model Name	Indoor Unit		S-6071PU3E	S-1014PU3E
	Outdoor Unit		U-71PZH3R5	U-100PZH3R5
	Panel		Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A
Cooling capacity	kW		7.1 (2.2 - 9.0)	10.0 (3.1 - 12.5)
Heating capacity			8.0 (2.0 - 9.0)	11.2 (3.1 - 14.0)
EER : COP	BTU/h		24,200 (7,500 - 30,700)	34,100 (10,600 - 42,700)
COP@H2 condition			27,300 (6,800 - 30,700)	38,200 (10,600 - 47,800)
TCSPF : HSPF	Residential	W/W	4.06 : 4.30	4.41 : 5.00
		W/W	2.60	2.90
	Commercial			
Total power input	Cooling : Heating	kW	1.75 : 1.86	2.27 : 2.24
Indoor Unit	Power source	Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz
		V	230V 240V	230V 240V
		mm	256 x 840 x 840	319 x 840 x 840
		mm	33.5 x 950 x 950	33.5 x 950 x 950
		kg	20 / 5	25 / 5
		L/s	367 / 267 / 217 : 367 / 267 / 217	601 / 434 / 300 : 601 / 434 / 300
Air volume (H/M/L)	Cooling : Heating	L/s	601 / 434 / 300 : 601 / 434 / 300	
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	37 / 31 / 28 : 37 / 31 / 28	45 / 38 / 32 : 45 / 38 / 32
Sound power level (H/M/L)	Cooling : Heating	dB	52 / 46 / 43 : 52 / 46 / 43	60 / 53 / 47 : 60 / 53 / 47
Number of fan speeds			5	5
Drain pipe size	mm		VP-25	VP-25
Outdoor Unit				
Outdoor Unit	Power source	Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz
		V	230V 240V	230V 240V
		A	8.25 : 8.70 7.95 : 8.35	10.7 : 10.6 10.3 : 10.1
		mm	996 x 940 x 340	1,416 x 940 x 340
		kg	66	99
		L/s	1,018 : 1,002	1,970 : 1,803
Air volume	Cooling : Heating	L/s	1,970 : 1,803	
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)
Sound power level (Silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)
Piping connections	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	5 - 50	5 - 85
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30
Maximum chargeless length		m	30	30
Refrigerant at shipping, Additional gas amount		g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)
Operating range	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

Specifications of R32 Compact Model

R32
REFRIGERANT

Capacity			6.0kW	7.1kW	10.0kW	
Model Name	Indoor Unit		S-6071PU3E	S-6071PU3E	S-1014PU3E	
	Outdoor Unit		U-60PZ4R5	U-71PZ4R5	U-100PZ4R5	
	Panel		Standard type:CZ-KPU3,CZ-KPU3W ECONAVI type:CZ-KPU3A,CZ-KPU3AW	Standard type:CZ-KPU3,CZ-KPU3W ECONAVI type:CZ-KPU3A,CZ-KPU3AW	Standard type:CZ-KPU3,CZ-KPU3W ECONAVI type:CZ-KPU3A,CZ-KPU3AW	
Cooling capacity	kW		6.0 (2.0 - 7.1)	7.1 (2.6 - 7.7)	10.0 (3.0 - 11.0)	
Heating capacity			6.0 (1.8 - 7.0)	7.1 (2.1 - 8.1)	10.0 (2.6 - 12.0)	
EER : COP	BTU/h		20,500 (6,800 - 24,200)	24,200 (8,900 - 26,300)	34,100 (10,200 - 37,500)	
COP@H2 condition			20,500 (6,100 - 23,900)	24,200 (7,200 - 27,600)	34,100 (8,900 - 40,900)	
Total power input	W/W		3.82 : 4.48	3.50 : 4.44	3.82 : 4.93	
	W/W		4.39	4.36	4.84	
TCSPF : HSPF	Residential	Cooling : Heating	kW	1.57 : 1.34	2.03 : 1.60	2.62 : 2.03
		Hot Climate		5.74 : 6.69	5.18 : 5.79	5.76 : 6.14
		Average Climate		5.13 : 5.44	4.69 : 4.90	5.18 : 5.26
	Commercial	Cold Climate		5.30 : 4.45	4.86 : 4.11	5.39 : 4.52
		Hot Climate		6.38 : 6.71	5.78 : 5.80	6.41 : 6.22
		Average Climate		6.64 : 5.97	6.09 : 5.28	6.57 : 5.73
Cold Climate		7.23 : 5.06	6.82 : 4.58	7.18 : 5.02		
Indoor Unit						
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	
Dimensions	H x W x D	Indoor	V	230V 240V	230V 240V	
		Panel	mm	256 x 840 x 840	319 x 840 x 840	
Net weight		mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	
Air volume (H/M/L)		kg	20 / 5	20 / 5	25 / 5	
Sound pressure level (H/M/L)		L/s	350 / 266 / 216 : 350 / 266 / 216	366 / 266 / 216 : 366 / 266 / 216	600 / 433 / 300 : 600 / 433 / 300	
Sound power level (H/M/L)		dB(A)	36 / 31 / 28 : 36 / 31 / 28	37 / 31 / 28 : 37 / 31 / 28	45 / 38 / 32 : 45 / 38 / 32	
Sound power level (H/M/L)		dB	51 / 46 / 43 : 51 / 46 / 43	52 / 46 / 43 : 52 / 46 / 43	60 / 53 / 47 : 60 / 53 / 47	
Number of fan speeds			5	5	5	
Drain pipe size		mm	VP-25	VP-25	VP-25	
Outdoor Unit						
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	
Current (rated)	Cooling : Heating	V	230V 240V	230V 240V	230V 240V	
		A	6.90 : 5.90 6.60 : 5.65	8.90 : 7.05 8.55 : 6.75	11.5 : 8.90 11.0 : 8.55	
Dimensions	H x W x D	mm	619 x 824 x 299	695 x 875 x 320	795 x 875 x 320	
Net weight		kg	35	45	55	
Air volume	Cooling : Heating	m³/min	34.0 : 33.0	45.0 : 46.0	56.0 : 53.0	
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	47 : 47	47 : 49	54 : 54	
Sound power level (Silent mode)	Cooling : Heating	dB	65 : 65	65 : 67	72 : 72	
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.70	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	
Pipe length range	min. - max.	m	3 - 30	3 - 30	3 - 30	
Elevation difference (OU located lower, OU located higher)		m	15, 15	20, 20	20, 20	
Maximum chargeless length		m	10	10	10	
Refrigerant at shipping, Additional gas amount		g	R32 1,220 / 15 (g/m)	R32 1,350 / 25 (g/m)	R32 1,930 / 25 (g/m)	
Operation ranges	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	

12.5kW		14.0kW	
S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E
U-125PZH3R5	U-125PZH3R8	U-140PZH3R5	U-140PZH3R8
Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A	Standard type:CZ-KPU3H ECONAVI type:CZ-KPU3A
12.5 (3.2 - 14.0) 14.0 (3.2 - 16.0)	12.5 (3.2 - 14.0) 14.0 (3.2 - 16.0)	14.0 (3.3 - 16.0) 16.0 (3.3 - 18.0)	14.0 (3.3 - 16.0) 16.0 (3.3 - 18.0)
42,700 (10,900 - 47,800) 47,800 (10,900 - 54,600)	42,700 (10,900 - 47,800) 47,800 (10,900 - 54,600)	47,800 (11,300 - 54,600) 54,600 (11,300 - 61,400)	47,800 (11,300 - 54,600) 54,600 (11,300 - 61,400)
3.80 : 4.61 2.70	3.80 : 4.61 2.70	3.41 : 4.30 2.50	3.41 : 4.30 2.50
3.29 : 3.04	3.29 : 3.04	4.11 : 3.72	4.11 : 3.72
5.71 : 5.63	5.71 : 5.63	5.35 : 5.60	5.35 : 5.60
5.20 : 4.88	5.20 : 4.88	4.93 : 4.71	4.93 : 4.71
5.39 : 4.28	5.39 : 4.28	5.17 : 4.01	5.17 : 4.01
6.36 : 5.74	6.36 : 5.74	5.96 : 5.76	5.96 : 5.76
6.72 : 5.32	6.72 : 5.32	6.43 : 5.25	6.43 : 5.25
7.37 : 4.72	7.37 : 4.72	7.10 : 4.53	7.10 : 4.53
1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz
230V 240V	230V 240V	230V 240V	230V 240V
319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
25 / 5	25 / 5	25 / 5	25 / 5
617 / 450 / 317 : 617 / 450 / 317	617 / 450 / 317 : 617 / 450 / 317	634 / 484 / 334 : 634 / 484 / 334	634 / 484 / 334 : 634 / 484 / 334
46 / 39 / 33 : 46 / 39 / 33	46 / 39 / 33 : 46 / 39 / 33	47 / 40 / 34 : 47 / 40 / 34	47 / 40 / 34 : 47 / 40 / 34
61 / 54 / 48 : 61 / 54 / 48	61 / 54 / 48 : 61 / 54 / 48	62 / 55 / 49 : 62 / 55 / 49	62 / 55 / 49 : 62 / 55 / 49
5	5	5	5
VP-25	VP-25	VP-25	VP-25
1 Phase/ 50Hz	3 Phase/ 50Hz	1 Phase/ 50Hz	3 Phase/ 50Hz
230V 240V	400V 415V	230V 240V	400V 415V
15.4 : 14.2 14.7 : 13.6	5.15 : 4.80 5.00 : 4.65	19.2 : 17.4 18.4 : 16.7	6.45 : 5.90 6.20 : 5.65
1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340
99	99	99	99
2,087 : 1,870	2,087 : 1,870	2,154 : 1,937	2,154 : 1,937
53 (51) : 53 (51)	53 (51) : 53 (51)	54 (52) : 54 (52)	54 (52) : 54 (52)
69 (67) : 69 (67)	69 (67) : 69 (67)	70 (68) : 70 (68)	70 (68) : 70 (68)
Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
5 - 85	5 - 85	5 - 85	5 - 85
15, 30	15, 30	15, 30	15, 30
30	30	30	30
R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)
-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

Notes:

- In the case of nance X OFF
- In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
- AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
- TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
- Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- H:High at setting 5 stage (Level 5), M:Middle at setting 5 stage (Level 3), L:Low at setting 5 stage (Level 1)

*1 For piping connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

*2 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

12.5kW		14.0kW	
S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E
U-100PZ4R8	U-125PZ4R5	U-125PZ4R8	U-140PZ4R5
Standard type:CZ-KPU3,CZ-KPU3W ECONAVI type:CZ-KPU3A,CZ-KPU3AW	Standard type:CZ-KPU3,CZ-KPU3W ECONAVI type:CZ-KPU3A,CZ-KPU3AW	Standard type:CZ-KPU3,CZ-KPU3W ECONAVI type:CZ-KPU3A,CZ-KPU3AW	Standard type:CZ-KPU3,CZ-KPU3W ECONAVI type:CZ-KPU3A,CZ-KPU3AW
10.0 (3.0-11.5) 10.0 (3.0-14.0)	12.5 (3.2 - 13.5) 12.5 (3.1 - 15.0)	12.5 (3.2 - 13.5) 12.5 (3.1 - 15.0)	14.0 (3.3 - 15.0) 14.0 (3.2 - 16.0)
42,700 (10,200-39,200) 34,100 (10,200 - 47,800)	42,700 (10,900 - 46,100) 42,700 (10,600 - 51,200)	42,700 (10,900 - 46,100) 42,700 (10,600 - 51,200)	47,800 (11,300 - 51,200) 47,800 (10,700 - 54,600)
3.82 : 4.93 4.78	3.58 : 4.43 4.33	3.58 : 4.43 4.33	3.23 : 4.18 4.10
2.62 : 2.03	3.49 : 2.82	3.49 : 2.82	4.34 : 3.35
5.77 : 5.43	5.34 : 5.60	5.34 : 5.60	4.95 : 5.66
5.00 : 5.05	4.71 : 4.88	4.71 : 4.88	4.51 : 4.76
5.09 : 4.62	4.87 : 4.17	4.87 : 4.17	4.68 : 3.99
6.60 : 5.34	5.96 : 5.57	5.96 : 5.57	5.46 : 5.70
7.05 : 5.10	5.99 : 5.14	5.99 : 5.14	5.88 : 5.17
7.93 : 4.78	6.54 : 4.55	6.54 : 4.55	6.41 : 4.48
1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
230V 240V	230V 240V	230V 240V	230V 240V
319 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
25 / 5	25 / 5	25 / 5	25 / 5
600 / 433 / 300 : 600 / 433 / 300	616 / 450 / 316 : 616 / 450 / 316	616 / 450 / 316 : 616 / 450 / 316	633 / 483 / 333 : 633 / 483 / 333
45 / 38 / 32 : 45 / 38 / 32	46 / 39 / 33 : 46 / 39 / 33	46 / 39 / 33 : 46 / 39 / 33	47 / 40 / 34 : 47 / 40 / 34
60 / 53 / 47 : 60 / 53 / 47	61 / 54 / 48 : 61 / 54 / 48	61 / 54 / 48 : 61 / 54 / 48	62 / 55 / 49 : 62 / 55 / 49
5	5	5	5
VP-25	VP-25	VP-25	VP-25
3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz
400V 415V	230V 240V	400V 415V	230V 240V
4.15 : 3.20 4.00 : 3.10	16.1 : 13.0 15.5 : 12.5	5.35 : 4.35 5.15 : 4.15	20.1 : 15.5 19.2 : 14.8
996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
80	83	82	83
73.0 : 73.0	82.0 : 80.0	82.0 : 80.0	84.0 : 82.0
52 : 52	55 : 55	55 : 55	56 : 56
70 : 70	73 : 73	73 : 73	74 : 74
Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
5 - 50	5 - 50	5 - 50	5 - 50
15, 30	15, 30	15, 30	15, 30
30	30	30	30
R32 2,400 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)
-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Indoor Unit


Low Profile Mini Cassette

Redesigned for a lower vertical profile, it fits easily into a standard 60 x 60cm ceiling grid without the need to alter bar configuration. This makes the Low Profile Mini Cassette ideal for small commercial and retrofit applications, in particular those with lower ceilings.

nanoe™ X

Generator Mark2

nanoe™ X as a standard




Technical focus

- Market-leading energy efficiency
- Compact design (230mm High)
- Easy installation
- Built-in drain pump
- Mini cassette fits into a 600 x 600mm ceiling grid
- Powerful drain pump gives 850mm lift
- DC fan motor with variable speed and a new heat exchanger ensures efficient power consumption
- Multi-directional air flow


Compact, stylish design

Thanks to advanced Panasonic design the panel is a compact 625 x 625mm, offering elegant, unobtrusive installation even where space is limited.

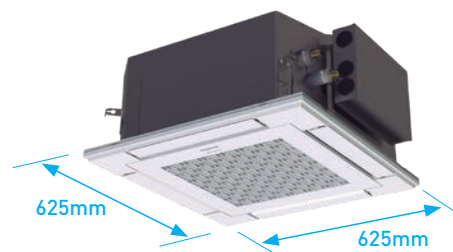


Lighter and slimmer for easier installation

When only 230mm of indoor body height, it can easily fit in limited spaces and tight spots. (Required 243mm from bottom of panel to top of the unit)




Individual flap control

Keep everyone comfortable by directing air where it's needed and away from where it isn't with individual flap control.



A drain height of up to 850mm from the ceiling surface

The internal pump allows the drain pipe to be elevated up to 850mm above the base of the unit.




PY3 Series



Dimensions



S-25PY3E
S-36PY3E
S-50PY3E
S-60PY3E



Panel
CZ-KPY4



CZ-RTC6WBL*1
CZ-RTC6WBLW2*1



CZ-RTC5B



CZ-RTC4A



CZ-CAPWFC2

*1 Black models are also available.
Note: Product image not to scale.

Specifications

Capacity			2.5KW	3.5KW	5.0KW	6.0KW
model Name	Indoor Unit		S-25PY3E	S-36PY3E	S-50PY3E	S-60PY3E
	Outdoor Unit		U-25PZ3R5	U-36PZ3R5	U-50PZ3R5	U-60PZ4R5
	Panel		CZ-KPY4	CZ-KPY4	CZ-KPY4	CZ-KPY4
	Receiver		CZ-RWRY3	CZ-RWRY3	CZ-RWRY3	CZ-RWRY3
Cooling capacity : Heating capacity	kW		2.5 (1.3-3.9) 3.2 (1.3-4.6)	3.6 (1.5-4.0) 3.6 (1.3-4.6)	5.0 (1.5-6.4) 5.0 (1.5-6.4)	6.0 (2.0-7.0) 6.0 (1.8-7.0)
	BTU/h		8,500 (4,400-13,300) 10,900 (4,400-15,700)	12,300 (5,100-13,600) 12,300 (4,400-15,700)	17,100 (5,100-21,800) 17,100 (5,100-21,800)	20,500 (6,800-23,900) 20,500 (6,100-23,900)
EER : COP	W/W		4.46 : 4.44	4.55 : 4.29	3.50 : 3.94	3.33 : 3.49
Power input (min - max)	Cooling : Heating	kW	0.56(0.27-1.10):0.72(0.25-1.35)	0.91(0.28-1.12):0.84(0.25-1.36)	1.43(0.27-2.20):1.27(0.27-2.20)	1.80(0.34-2.53):1.72(0.34-2.45)
Indoor Unit						
Power source	Phase/Hz		1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz	1 Phase/ 50Hz
	V		230V 240V	230V 240V	230V 240V	230V 240V
Dimensions	H x W x D	mm	243 x 575 x 575	243 x 575 x 575	243 x 575 x 575	243 x 575 x 575
Net weight		kg	15	15	15	15
Air volume	Cooling : Heating	L/s	141 : 141	158 : 158	200 : 200	233 : 233
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	31/28/25 : 31/28/25	34/30/25 : 34/30/25	39/34/27 : 39/34/27	43/37/31 : 43/37/31
Sound power level (H/M/L)	Cooling : Heating	dB(A)	46/43/40 : 46/43/40	49/45/40 : 49/45/40	54/49/42 : 54/49/42	58/52/46 : 58/52/46
Outdoor Unit						
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
	V		230V 240V	230V 240V	230V 240V	230V 240V
Current	Cooling, Heating	A	2.55, 3.25 2.45, 3.10	4.05, 3.75 3.85, 3.60	6.35, 5.70 6.10, 5.45	7.90, 7.60 7.55, 7.25
Dimensions	H x W x D	mm	619 x 824 x 299	619 x 824 x 299	619 x 824 x 299	619 x 824 x 299
Net weight		kg	31	31	35	35
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7
Pipe length	min. - max.	m	3 - 20	3 - 20	3 - 30	3 - 30
Elevation difference		m	15	15	15	15
Operation ranges	Cooling : Heating	°C	-10 – +46 : -15 – +24	-10 – +46 : -15 – +24	-10 – +46 : -15 – +24	-10 – +46 : -15 – +24

Notes:

The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823

- Cooling: Indoor temperature: 27°C DB/ 19°C WB, Outdoor temperature: 35°C DB/ 24°C WB
- Heating: Indoor temperature: 20°C DB/ 15°C WB, Outdoor temperature: 7°C DB/ 6°C WB

Indoor Unit Under Ceiling

Providing outstanding energy-saving performance, comfort and long-distance airflow distribution, these units are perfect for retail stores and schools.

nanoeTMX

Generator Mark2

nanoeTM X as a standard



Self-diagnosing
Function



Automatic
Fan
Operation



Automatic
Restart
Function



DC Motor

Compact Looking, Stylish, One-motion Design

With its streamlined, one-motion form, the unit looks thin and compact when installed for a neat appearance in any room.

When not operating, the louver closes to provide an elegant look while also keeping the unit clean.



Energy-saving Technology Delivering Top-class Efficiency


Top Class Energy Saving

Optimisation of the shape of the casing and fan assures bigger air flow and higher efficiency. Energy-saving performance is top class in the industry.

New DC fan motor



Large Diagonal Air Flow Fan

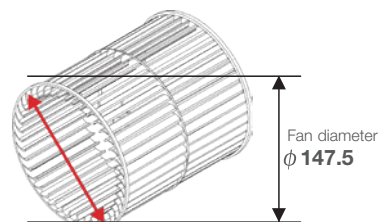

PT3 Series



Dimensions



S-6071PT3E



S-1014PT3E

CZ-RTC6WBL*1
CZ*RTC6WBLW2 *1

CZ-RTC5B



CZ-RTC4A




CZ-CAPWFC2

*1 Black models are also available.
Note: Product image not to scale.

Comfortable, Long-Distance Airflow Distribution

The shape of the outlet has been optimised to provide long-distance air flow distribution. Even in long rooms, air flow reaches every corner for exceptionally comfortable air conditioning.

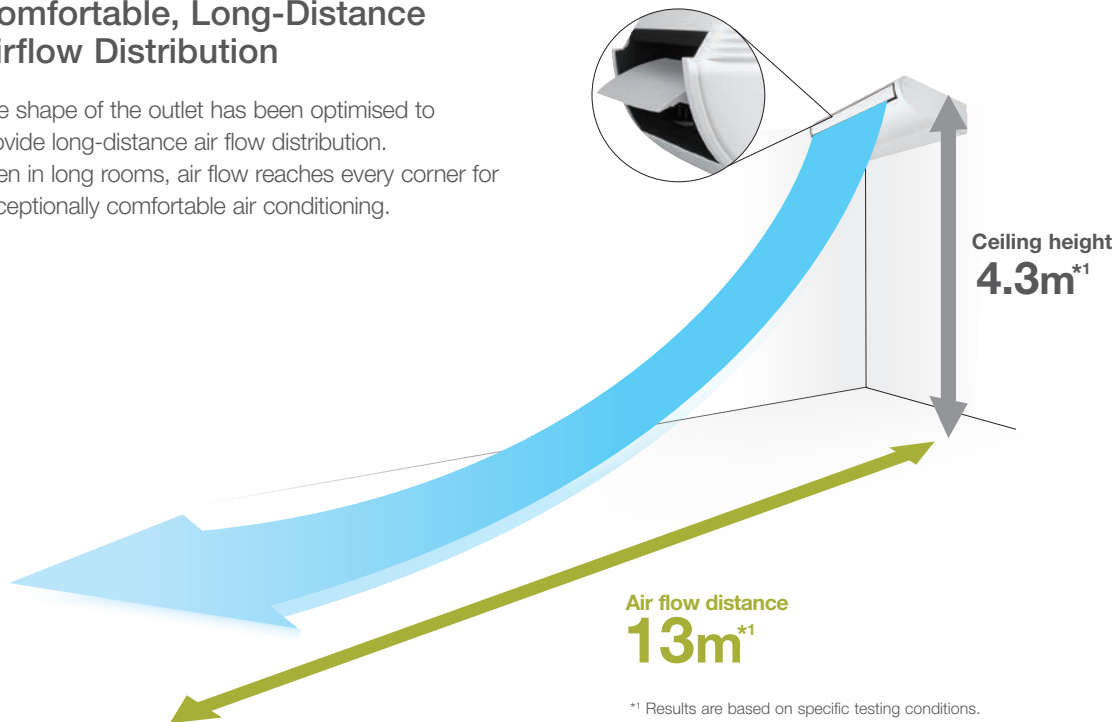

*1 Results are based on specific testing conditions.

High Ceiling Setting*2	Air flow distance		
	100	125	140
4.3m	Up to 12m	Up to 13m	Up to 13m

*2 Dedicated fan speed setting required.



Indoor Unit: Under Ceiling

Specifications of R32 Deluxe Model



Capacity			9.5kW		12.1kW	
Model Name	Indoor Unit		S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E
	Outdoor Unit		U-100PZH3R5	U-100PZH3R8	U-125PZH3R5	U-125PZH3R8
Cooling capacity : Heating capacity		kW	9.5 (3.1 - 12.5) 11.2 (3.1 - 14.0)	9.5 (3.1 - 12.5) 11.2 (3.1 - 14.0)	12.1 (3.2 - 14.0) 14.0 (3.2 - 16.0)	12.1 (3.2 - 14.0) 14.0 (3.2 - 16.0)
		BTU/h	32,400 (10,600 - 42,700) 38,200 (10,600 - 47,800)	32,400 (10,600 - 42,700) 38,200 (10,600 - 47,800)	41,300 (10,900 - 47,800) 47,800 (10,900 - 54,600)	41,300 (10,900 - 47,800) 47,800 (10,900 - 54,600)
EER : COP		W/W	4.15 : 4.09	4.15 : 4.09	3.51 : 3.78	3.51 : 3.78
COP@H2 condition		W/W	2.72	2.72	2.52	2.52
Total power input		kW	2.29 : 2.74	2.29 : 2.74	3.45 : 3.70	3.45 : 3.70
TCSPF : HSPF	Residential	Hot Climate	6.07 : 5.59	6.07 : 5.59	5.42 : 5.37	5.42 : 5.37
		Average Climate	5.25 : 4.74	5.25 : 4.74	4.85 : 4.44	4.85 : 4.44
		Cold Climate	5.33 : 4.21	5.33 : 4.21	5.03 : 3.84	5.03 : 3.84
	Commercial	Hot Climate	6.84 : 5.66	6.84 : 5.66	6.07 : 5.50	6.07 : 5.50
		Average Climate	6.95 : 5.18	6.95 : 5.18	6.41 : 4.97	6.41 : 4.97
		Cold Climate	7.54 : 4.66	7.54 : 4.66	7.03 : 4.35	7.03 : 4.35
Indoor Unit						
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
		V	230V 240V	230V 240V	230V 240V	230V 240V
Dimension	H x W x D	Indoor	mm	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690
Net weight		Indoor	kg	40	40	40
Air volume (H/M/L)		Cooling : Heating	L/s	501 / 417 / 384 : 501 / 417 / 384	501 / 417 / 384 : 501 / 417 / 384	567 / 467 / 400 : 567 / 467 / 400
Sound pressure level (H/M/L)		Cooling : Heating	dB(A)	42 / 37 / 34 : 42 / 37 / 34	42 / 37 / 34 : 42 / 37 / 34	46 / 40 / 35 : 46 / 40 / 35
Sound power level (H/M/L)		Cooling : Heating	dB	60 / 55 / 52 : 60 / 55 / 52	60 / 55 / 52 : 60 / 55 / 52	64 / 58 / 53 : 64 / 58 / 53
Number of fan speeds				5	5	5
Drain piping		mm	VP-20	VP-20	VP-20	VP-20
Outdoor Unit						
Power source		Phase/Hz	1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
		V	230V 240V	400V 415V	230V 240V	400V 415V
Current (rated)		Cooling : Heating	A	10.8 : 12.9 10.4 : 12.4	3.65 : 4.35 3.45 : 4.15	16.1 : 17.3 15.5 : 16.6
Dimension	H x W x D	mm	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340
Net weight		kg	99	99	99	99
Air volume		Cooling : Heating	L/s	1,970 : 1,803	1,970 : 1,803	2,087 : 1,870
Sound pressure level (Silent mode)		Cooling : Heating	dB(A)	52 (50) : 52 (50)	52 (50) : 52 (50)	53 (51) : 53 (51)
Sound power level (Silent mode)		Cooling : Heating	dB	68 (66) : 68 (66)	68 (66) : 68 (66)	69 (67) : 69 (67)
Piping connections		Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range		min. - max.	m	5 - 85	5 - 85	5 - 85
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30	15, 30
Maximum chargeless length		m	30	30	30	30
Refrigerant at shipping / Additional gas amount		g	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)
Operating range		Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

Specifications of R32 Compact Model



Capacity			6.0kW	6.8kW	10.0kW	
Model Name	Indoor Unit		S-6071PT3E	S-6071PT3E	S-1014PT3E	S-1014PT3E
	Outdoor Unit		U-60PZ4R5	U-71PZ4R5	U-100PZ4R5	U-100PZ4R8
Cooling capacity : Heating capacity	kW		6.0 (2.0 - 7.1) 6.0 (1.8 - 7.0)	6.8 (2.6 - 7.7) 6.8 (2.25 - 8.1)	10.0 (2.8 - 11.0) 10.0 (2.6 - 12.0)	10.0 (3.0 - 11.5) 10.0 (3.0 - 14.0)
		BTU/h	20,500 (6,800 - 24,200) 20,500 (6,100 - 23,900)	23,200 (8,900 - 26,300) 23,200 (7,700 - 27,600)	34,100 (9,600 - 37,500) 34,100 (8,900 - 40,900)	34,100 (10,200 - 39,200) 34,100 (10,200 - 47,800)
EER : COP	W/W		3.82 : 4.41	3.62 : 4.33	3.64 : 4.24	3.64 : 4.24
COP@H2 condition	W/W		4.29	4.23	4.17	4.13
Total power input	Cooling : Heating	kW	1.57 : 1.36	1.88 : 1.57	2.75 : 2.36	2.75 : 2.36
TCSPF : HSPF	Residential	Hot Climate	5.18 : 6.06	5.18 : 5.61	5.31 : 5.90	5.24 : 5.58
		Average Climate	4.54 : 5.02	4.59 : 4.77	4.84 : 4.89	4.63 : 4.78
		Cold Climate	4.61 : 4.21	4.70 : 4.03	4.99 : 4.21	4.70 : 4.15
	Commercial	Hot Climate	5.63 : 6.12	5.73 : 5.64	5.88 : 6.02	5.84 : 5.60
		Average Climate	5.63 : 5.52	5.81 : 5.14	6.18 : 5.45	6.12 : 5.14
		Cold Climate	5.98 : 4.75	6.26 : 4.49	6.74 : 4.75	6.63 : 4.57
Indoor Unit						
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
		V	230V 240V	230V 240V	230V 240V	230V 240V
Dimension	H x W x D	Indoor	mm	235 X 1,275 X 690	235 X 1,275 X 690	235 X 1,590 X 690
Net weight		Indoor	kg	34	34	40
Air volume (H/M/L)		Cooling : Heating	L/s	333 / 283 / 241 : 333 / 283 / 241	350 / 300 / 258 : 350 / 300 / 258	500 / 416 / 383 : 500 / 416 / 383
Sound pressure level (H/M/L)		Cooling : Heating	dB(A)	38 / 34 / 29 : 38 / 34 / 29	39 / 35 / 30 : 39 / 35 / 30	42 / 37 / 34 : 42 / 37 / 34
Sound power level (H/M/L)		Cooling : Heating	dB	56 / 52 / 47 : 56 / 52 / 47	57 / 53 / 48 : 57 / 53 / 48	60 / 55 / 52 : 60 / 55 / 52
Number of fan speeds			5	5	5	5
Drain piping		mm	VP-20	VP-20	VP-20	VP-20
Outdoor Unit						
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
		V	230V 240V	230V 240V	230V 240V	400V 415V
Current (rated)	Cooling : Heating	A	6.90 : 5.95 6.60 : 5.70	8.25 : 6.90 7.90 : 6.60	12.1 : 10.4 11.6 : 9.95	4.35 : 3.75 4.20 : 3.60
Dimension	H x W x D	mm	619 x 824 x 299	695 x 875 x 320	795 x 875 x 320	996 x 980 x 370
Net weight		kg	35	45	55	80
Air volume	Cooling : Heating	L/s	566 : 550	750 : 766	933 : 883	1,216 : 1,216
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	47 : 47	47 : 49	54 : 54	52 : 52
Sound power level (Silent mode)	Cooling : Heating	dB	65 : 65	65 : 67	72 : 72	70 : 70
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.70	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	3 - 30	3 - 30	3 - 30	5 - 50
Elevation difference (OU located lower, OU located higher)		m	15, 15	20, 20	20, 20	15, 30
Maximum chargeless length		m	10	10	10	30
Refrigerant at shipping / Additional gas amount		g	R32 1,220 / 15 (g/m)	R32 1,350 / 25 (g/m)	R32 1,930 / 25 (g/m)	R32 2,400 / 45 (g/m)
Operating range	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

13.4kW	
S-1014PT3E	S-1014PT3E
U-140PZH3R5	U-140PZH3R8
13.4 (3.3 - 16.0)	13.4 (3.3 - 16.0)
16.0 (3.3 - 18.0)	16.0 (3.3 - 18.0)
45,700 (11,300 - 54,600)	45,700 (11,300 - 54,600)
54,600 (11,300 - 61,400)	54,600 (11,300 - 61,400)
3.21 : 3.48	3.21 : 3.48
2.37	2.37
4.17 : 4.60	4.17 : 4.60
5.07 : 5.26	5.07 : 5.26
4.61 : 4.22	4.61 : 4.22
4.82 : 3.58	4.82 : 3.58
5.66 : 5.45	5.66 : 5.45
6.10 : 4.83	6.10 : 4.83
6.71 : 4.13	6.71 : 4.13
1 Phase / 50Hz	1 Phase / 50Hz
230V 240V	230V 240V
235 X 1,590 X 690	235 X 1,590 X 690
40	40
584 / 484 / 417 : 584 / 484 / 417	584 / 484 / 417 : 584 / 484 / 417
47 / 41 / 36 : 47 / 41 / 36	47 / 41 / 36 : 47 / 41 / 36
65 / 59 / 54 : 65 / 59 / 54	65 / 59 / 54 : 65 / 59 / 54
5	5
VP-20	VP-20
1 Phase / 50Hz	3 Phase / 50Hz
230V 240V	400V 415V
19.5 : 21.5 18.7 : 20.6	6.55 : 7.30 6.30 : 6.95
1,416 x 940 x 340	1,416 x 940 x 340
99	99
2,154 : 1,937	2,154 : 1,937
54 (52) : 54 (52)	54 (52) : 54 (52)
70 (68) : 70 (68)	70 (68) : 70 (68)
Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
5 - 85	5 - 85
15, 30	15, 30
30	30
R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)
-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

12.5kW		13.6kW	
S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E
U-125PZ4R5	U-125PZ4R8	U-140PZ4R5	U-140PZ4R8
12.5 (3.2 - 13.5)	12.5 (3.2 - 13.5)	13.6 (3.3 - 15.0)	13.6 (3.3 - 15.0)
12.5 (3.0 - 15.0)	12.5 (3.0 - 15.0)	14.0 (3.1 - 16.0)	14.0 (3.1 - 16.0)
42,700 (10,900 - 46,100)	42,700 (10,900 - 46,100)	46,400 (11,300 - 51,200)	46,400 (11,300 - 51,200)
42,700 (10,200 - 51,200)	42,700 (10,200 - 51,200)	47,800 (10,600 - 54,600)	47,800 (10,600 - 54,600)
3.32 : 3.89	3.32 : 3.89	3.15 : 3.70	3.15 : 3.70
3.81	3.81	3.64	3.64
3.76 : 3.21	3.76 : 3.21	4.32 : 3.78	4.32 : 3.78
4.97 : 5.43	4.97 : 5.43	4.80 : 5.35	4.80 : 5.35
4.43 : 4.47	4.43 : 4.47	4.32 : 4.28	4.32 : 4.28
4.57 : 3.78	4.57 : 3.78	4.47 : 3.57	4.47 : 3.57
5.51 : 5.53	5.51 : 5.53	5.34 : 5.52	5.34 : 5.52
5.75 : 4.98	5.75 : 4.98	5.65 : 4.89	5.65 : 4.89
6.24 : 4.29	6.24 : 4.29	6.18 : 4.14	6.18 : 4.14
1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
230V 240V	230V 240V	230V 240V	230V 240V
235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690	235 X 1,590 X 690
40	40	40	40
566 / 466 / 400 : 566 / 466 / 400	566 / 466 / 400 : 566 / 466 / 400	583 / 483 / 416 : 583 / 483 / 416	583 / 483 / 416 : 583 / 483 / 416
46 / 40 / 35 : 46 / 40 / 35	46 / 40 / 35 : 46 / 40 / 35	47 / 41 / 36 : 47 / 41 / 36	47 / 41 / 36 : 47 / 41 / 36
64 / 58 / 53 : 64 / 58 / 53	64 / 58 / 53 : 64 / 58 / 53	65 / 59 / 54 : 65 / 59 / 54	65 / 59 / 54 : 65 / 59 / 54
5	5	5	5
VP-20	VP-20	VP-20	VP-20
1 Phase / 50Hz	3 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
230V 240V	400V 415V	230V 240V	400V 415V
17.4 : 14.8 16.7 : 14.2	5.75 : 4.95 5.55 : 4.75	20.0 : 17.5 19.1 : 16.8	6.65 : 5.80 6.40 : 5.60
996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
83	82	83	82
1,366 : 1,333	1,366 : 1,333	1,400 : 1,366	1,400 : 1,366
55 : 55	55 : 55	56 : 56	56 : 56
73 : 73	73 : 73	74 : 74	74 : 74
Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
5 - 50	5 - 50	5 - 50	5 - 50
15, 30	15, 30	15, 30	15, 30
30	30	30	30
R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)
-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Notes:

- In the case of nanoe X OFF
- In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
- AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
- TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.

*1 For piping connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

*2 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

NEW

Wall Mounted

Providing small, lightweight and low noise level design, it is ideal for small offices and other commercial applications. It also has a stylish smooth design with a washable front panel.

nanoe™X

Generator Mark3

nanoe™X as a standard



Self-diagnosing Function



Automatic Fan Operation



Dry Mode



Intelligent Auto Swing



Automatic Restart Function



Auto Swing (Auto Flap Control)



DC Motor

Technical focus

- Closed discharge port when not in use
- Lighter and smaller units make installation easy
- Quiet operation
- Smooth and durable design
- Piping outlet in six directions
- Washable front panel
- Air distribution is automatically altered depending on the operational mode of the unit

Closed discharge port

When the unit is turned off, the flap closes completely to prevent entry of dust into the unit and to keep the equipment clean.

Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear, left bottom, making installation easier.

Efficient installation made possible with support holders and drain hose lock mechanism

Secure connection between drain tray and drain hose with lock for tight fastening during installation and for ease of dismantling.





Securely hold the indoor unit against the wall, providing unobstructed access to install drain hose and piping.




Air distribution is automatically altered depending on the operational mode of the unit

The new PK4 features a five-position automatic airflow adjuster for both cooling & heating.

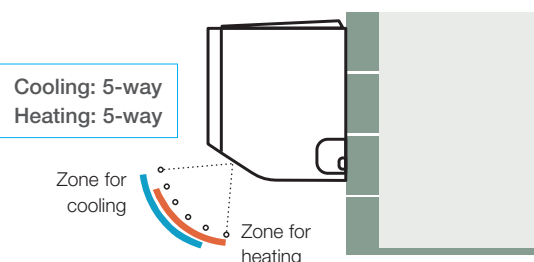

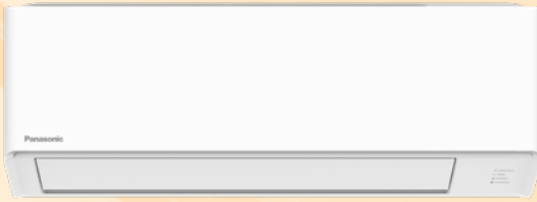

S-25PK4R
S-50PK4R

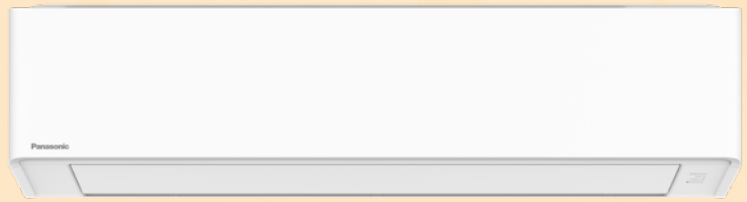

S-71PK4R
S-100PK4R



CZ-RTC6WBL*1
CZ*RTC6WBLW2 *1



CZ-RTC5B



CZ-RTC4A



CZ-CAPWFC2

*1 Black models are also available.
Note: Product image not to scale.

Specifications



Capacity				2.5kW	5.0kW	7.1kW	10.0kW
Model Name	Indoor Unit			S-25PK4R	S-50PK4R	S-71PK4R	S-100PK4R
	Outdoor Unit			CU-RZ25AKR	CU-RZ50AKR	CU-RZ71AKR	CU-RZ95AKR
Cooling capacity : Heating capacity	kW			2.5 (1.0 - 3.7) 3.0 (1.0 - 4.4)	5.0 (1.2 - 6.1) 6.0 (1.1 - 7.7)	7.1 (1.9 - 8.5) 8.0 (1.9 - 10.6)	8.8 (2.8 - 9.7) 9.0 (2.7 - 10.5)
		BTU/h		8,500 (3,200 - 12,600) 10,200 (3,400 - 15,000)	17,100 (4,100 - 20,800) 20,500 (3,800 - 26,300)	24,200 (6,500 - 29,000) 27,300 (6,500 - 36,200)	30,000 (9,600 - 33,100) 30,700 (9,200 - 35,800)
EER : COP	W/W			4.31 : 4.62	3.31 : 3.37	3.45 : 3.83	3.32 : 3.93
COP@H2 condition	W/W			4.48	3.33	3.79	3.89
Total power input	Cooling : Heating	kW		0.58 : 0.65	1.51 : 1.78	2.06 : 2.09	2.65 : 2.29
TCSPF : HSPF	Residential	Hot Climate		6.08 : 5.30	5.28 : 4.78	5.39 : 5.14	5.01 : 5.26
		Average Climate		5.03 : 4.82	4.83 : 4.04	5.02 : 4.45	4.66 : 4.44
		Cold Climate		5.03 : 4.25	5.02 : 3.50	5.24 : 3.82	4.87 : 3.89
	Commercial	Hot Climate		7.09 : 5.30	6.07 : 4.80	6.11 : 5.16	5.51 : 5.32
		Average Climate		7.15 : 5.00	7.01 : 4.37	7.05 : 4.74	5.91 : 4.87
		Cold Climate		8.12 : 4.52	8.29 : 3.88	8.25 : 4.19	6.46 : 4.33
Indoor Unit							
Power source		Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase/ 50Hz
		V		230V 240V	230V 240V	230V 240V	230V 240V
Dimensions	H x W x D	Indoor	mm	290 x 765 x 214	290 x 765 x 214	295 x 1,060 x 249	295 x 1,060 x 249
Net weight			kg	9	9	14	14
Air volume (H/M/L)	Cooling : Heating	L/s		188 / 133 / 96 200 / 146 / 110	208 / 166 / 138 228 / 176 / 138	375 / 305 / 235 375 / 305 / 235	375 / 333 / 291 375 / 333 / 291
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)		40 / 33 / 25 : 40 / 34 / 27	44 / 39 / 34 : 44 / 40 / 33	49 / 43 / 37 : 49 / 43 / 37	49 / 45 / 41 : 49 / 45 / 41
Sound power level (H/M/L)	Cooling : Heating	dB		56 / 49 / 41 : 56 / 50 / 43	60 / 55 / 50 : 60 / 56 / 49	65 / 59 / 53 : 65 / 59 / 53	65 / 61 / 57 : 65 / 61 / 57
Number of fan speeds				5	5	5	5
Drain pipe size		mm		VP-16	VP-16	VP-16	VP-16
Outdoor Unit							
Power source		Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
		V		230V 240V	230V 240V	230V 240V	400V 415V
Current (rated)	Cooling : Heating	A		2.65 : 3.00 2.55 : 2.90	6.70 : 7.80 6.50 : 7.50	9.15 : 9.25 8.75 : 8.90	11.8 : 10.1 11.3 : 9.65
Dimensions	H x W x D	mm		542 x 780 x 289	619 x 824 x 299	695 x 875 x 320	795 x 875 x 320
Net weight		kg		25	35	45	55
Air volume	Cooling : Heating	L/s		533 : 500	550 : 550	750 : 766	933 : 883
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)		48 : 49	48 : 49	54 : 54	55 : 55
Sound power level (Silent mode)	Cooling : Heating	dB		63 : 64	63 : 64	68 : 68	69 : 69
Piping connections	Liquid / Gas	mm		Ø6.35 (1/4) / Ø9.52 (3/8)	Ø6.35 (1/4) / Ø12.70 (1/2)	Ø6.35 (1/4) / Ø15.88 (5/8)	Ø6.35 (1/4) / Ø15.88 (5/8)
Pipe length range	min. - max.	m		3 - 20	3 - 30	3 - 30	3 - 30
Elevation difference (OU located lower, OU located higher)		m		15, 15	15, 15	20, 20	20, 20
Maximum chargeless length		m		7.5	10	10	10
Refrigerant at shipping, Additional gas amount		g		R32 540 / 10 (g/m)	R32 1,100 / 15 (g/m)	R32 1,350 / 25 (g/m)	R32 1,930 / 25 (g/m)
Operating range	Cooling : Heating	°C		-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Notes:

- In the case of nanoe X Off
- In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
- AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
- TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
- Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- H:High at setting 5 stage (Level 5), M:Middle at setting 5 stage (Level 3), L:Low at setting 5 stage (Level 1)
- * The different-diameter-tube joint is required.

Floor Console

This floor-type console's slender profile integrates unobtrusively into any interior, in a position that's also ideal when you want to warm your feet when it's cold.

nanoe™ X
Generator Mark1
 nanoe™ X as a standard




Technical focus

- A breakthrough design that integrates perfectly with the most modern environments.
- Compact design fits 50mm wall recess

Upper & Lower Vane Blow

Optimum air flow from the top and bottom of the unit assures that even your feet are kept comfortably warm. (Only during heating)

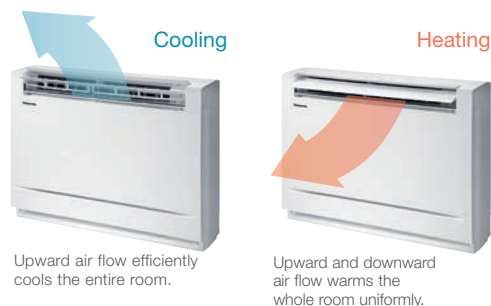

Compact Design


The design features a flat, elegant front panel that provides a neat appearance and the unit can be recessed into a wall up to 50mm.



Super Quiet

The indoor and outdoor units deliver quiet operation and pressing the Quiet mode button lowers operation noise even further to just 19dB for indoor unit with low fan speed.

19dB*1
Indoor



*1 CS-Z25UFRAW & CS-Z35UFRAW: In the Quiet mode during heating operation with low fan speed.



CS-Z25UFW
CS-Z35UFW
CS-Z50UFW

UFWAW



Dimensions



Wireless remote
controller included.



CZ-TACG1*1

Note: Product image not to scale.

Specifications of Current Model



Capacity			2.5kW	3.5kW	5.0kW
Model Name	Indoor Unit		CS-Z25UFW	CS-Z35UFW	CS-Z50UFW
	Outdoor Unit		CU-Z25UBA	CU-Z35UBA	CU-Z50UBA
Cooling capacity : Heating capacity	kW		2.50 (0.85~3.40) 3.40 (0.85~5.00)	3.50 (0.85~3.80) 4.30 (0.85~6.00)	5.00 (0.90~5.70) 5.60 (0.90~8.10)
		BTU/h	8,530 (2,900~11,600) 11,600 (2,900~17,100)	11,900 (2,900~13,000) 14,700 (2,900~20,500)	17,100 (3,070~19,400) 19,100 (3,070~27,600)
EER : COP		W/W	5.00 : 4.59	4.07 : 4.06	3.65 : 3.81
Power input (min-max)	Cooling : Heating	kW	0.50 (0.24-0.90) 0.74 (0.24-1.35)	0.86 (0.24-1.02) 1.06 (0.24-1.75)	1.37(0.26-1.81) : 1.47 (0.26-2.60)
TCSPF : HSPF	Residential	Hot Climate	5.70 : 4.12	5.46 : 4.49	5.51 : 4.48
		Average Climate	5.05 : 4.21	5.01 : 4.29	5.20 : 4.18
		Cold Climate	4.97 : 3.94	5.07 : 3.78	5.37 : 3.69
	Commercial	Hot Climate	6.22 : 3.89	6.01 : 4.18	6.16 : 4.20
		Average Climate	6.40 : 3.85	6.60 : 4.00	7.34 : 3.99
		Cold Climate	6.97 : 3.78	7.31 : 3.80	8.46 : 3.76
Indoor Unit					
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
		V	230V 240V	230V 240V	230V 240V
Dimensions	H x W x D	mm	600 x 750 x 207	600 x 750 x 207	600 x 750 x 207
Net weight		kg	13	13	13
Air volume	Cooling : Heating	L/s	163 : 173	170 : 182	198 : 227
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	38 / 25 / 20 : 38 / 25 / 19	39 / 26 / 20 : 39 / 25 / 19	44 / 31 / 27 : 46 / 33 / 29
Sound power level (H/M/L)	Cooling : Heating	dB(A)	54 / 41 / 36 : 54 / 41 / 35	55 / 42 / 36 : 55 / 41 / 35	60 / 47 / 43 : 62 / 49 / 45
Outdoor Unit					
Power source		Phase/Hz	1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
		V	230V 240V	230V 240V	230V 240V
Current (rated)	Cooling : Heating	A	2.40 : 3.40 2.30 : 3.25	3.90 : 4.80 3.70 : 4.60	6.20 : 6.60 6.00 : 6.40
Dimensions	H x W x D	mm	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320
Net weight		kg	33	35	42
Piping connections	Liquid / Gas	m	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52	Ø6.35 / Ø9.52
Pipe length	min. - max.	m	3 - 20	3 - 20	3 - 30
Elevation difference		m	15	15	20
Piping connections	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Notes:

The Rated Capacity, Power Input and Running Current are measured in accordance with AS/NZS 3823

- Cooling: Indoor temperature: 27°C DB/ 19°C WB, Outdoor temperature: 35°C DB/ 24°C WB
- Heating: Indoor temperature: 20°C DB/ 15°C WB, Outdoor temperature: 7°C DB/ 6°C WB
- Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions.
- Floor console is not supported by PAC Smart Connectivity+.

*1 If you connect WLAN adaptor (CZ-TACG1) to an indoor unit other than wall mounted type and operate from the smartphone with Panasonic Comfort Cloud App, airflow direction may not be operated as it is shown on the display.

Smart Connectivity and Control Solutions

Panasonic offers a range of smart connectivity and control solutions for residential and commercial applications that allow you to conveniently manage and monitor air conditioning units in single or multiple locations from one mobile device. Add solutions for partners such as contractors and service providers that simplify everything from configuration to repair diagnosis and discover a streamlined, next-generation air conditioning ecosystem.



Wide Range of Smart Control Solutions for All Needs

Whether you're a contractor or service provider looking for solutions to streamline everything from configuration to repair diagnosis, a facility manager overseeing multiple sites or a single office, or you're simply managing a home system, we offer a range of innovative, next-generation smart control solutions to suit your needs.

For end users and facility managers			For contractors/service providers
 Panasonic Comfort Cloud Intuitive and scalable air conditioning control solution using a personal mobile device.	 PAC Smart Connectivity+ Offers efficient energy management with high indoor air quality (IAQ) control.	 Panasonic AC Smart Cloud Monitor and manage energy consumption of multiple location through a cloud computing system.	 H&C Diagnosis APP H&C Control APP Connect to APP via Bluetooth for greatly improved convenience during configuration and repair diagnosis.

For Residential



Comfort Cloud
Panasonic
Comfort Cloud



Home
Automation
Ready

Personal Control Solutions Panasonic Comfort Cloud

■ Remotely manage and monitor multiple air conditioning units in your home

Easily control and access all features of the air conditioning units with smart centralised control.

■ Intuitive voice control

Control air conditioning units by voice command connecting to smart speaker.



PLUG & PLAY FOR HOME AUTOMATION

Easily connect with integrated controllers to become part of your automated home network.



Note: For further information, please check CLIPSAL® website.

by Schneider Electric

For Light Commercial



Comfort Cloud
Panasonic
Comfort Cloud



PAC Smart
Connectivity+

Cost Effective Energy Management Solution

Connectable
up to
200 Units
with just 1 device

■ Multiple location control at your convenience with Comfort Cloud

Gain control of multiple zones and sites intuitively adjusting temperature by areas with differentiated user rights settings.

■ Indoor Air Quality (IAQ) and efficient energy usage with PAC Smart Connectivity+

- Ultimate cooling comfort with sensing technology and automatic IAQ control.
- Simplified Plug & Play installation with BMS connection for better energy consumption.

For Multiple Building Management



Full Control of All Installations From A Single Internet Connection Panasonic AC Smart Cloud

■ Manage and monitor energy consumption patterns

Analyse energy usage, running time and optimise temperatures to reduce energy costs.

■ Centralised control solution with zero downtime

Receive real-time status updates to prevent breakdowns.

■ Flexible and scalable solution for expanding businesses and multi sites


Adaptable solutions that can easily be upgraded for new features, meet user demand and better IT management.

*1 CZ-TACG1 or CZ-CAPWFC2 Network Adaptor required per unit. Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available. To use Google Assistant to control your air conditioner, you will need a Google Assistant device. Google is a trademark of Google LLC. Google Home is compatible with the air conditioning systems shown on pages 4 and 5. Google functionality is only available with complete air conditioning systems (including Panasonic controllers).

Panasonic Comfort Cloud

Control air conditioning units from wherever and whenever with your smartphone, by using Panasonic Comfort Cloud and WLAN smart adaptor.

This scalable solution is ideal for one system, one site or multiple locations. Coupling the adapter with the already feature rich systems, makes it an ideal solution for both residential and commercial applications.

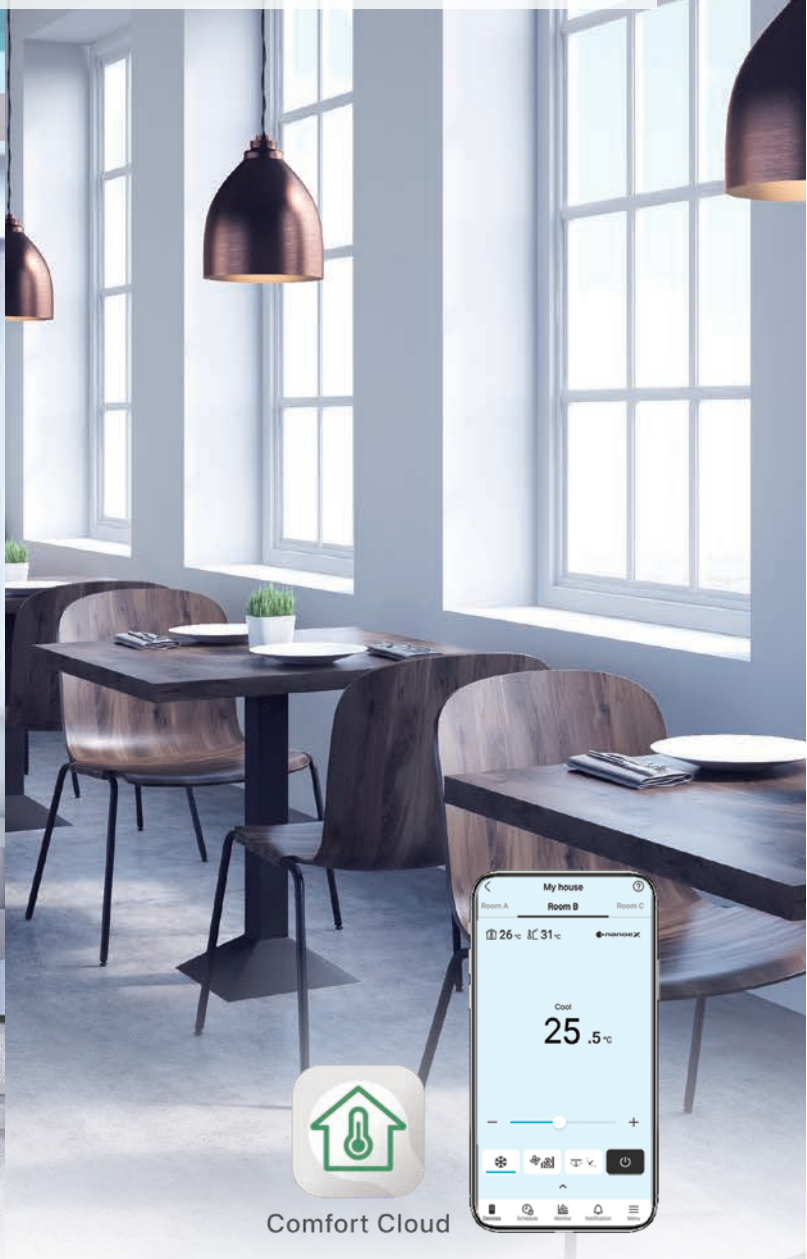

For Residential

Remotely manage and monitor air conditioning units from anywhere anytime.

For Light Commercial

Gain control of multiple zones and sites intuitively up to 200 indoor units.

Panasonic Comfort Cloud features

Voice Control

Control air conditioning units by voice command intuitively connecting to smart speaker.*1




From 1 to 200 Units

User can control up to 200 indoor units. 10 different sites, with up to 20 units / groups per site.



Easy Scheduling

Complex weekly scheduling made simple. Not only for one units, but across multiple sites and from a smartphone.




Multiple User

The Panasonic Comfort Cloud App allows multiuser access control. Restrict user access to specific units.



Energy Monitor

See the estimated power consumption and compare with other periods to see how energy bill can be reduced even more.*2




Error Codes

Error code notification through the App, provides early notification and allows for faster repair.



Application Examples

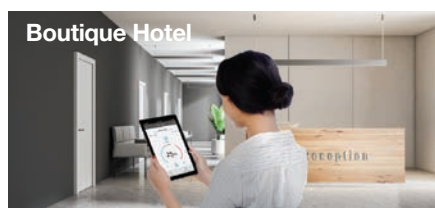

Boutique Hotel

Centralised control from reception.



Multiple location control for small business.

System Configuration

Network Adaptor

CZ-TACG1 CZ-CAPWFC2




CZ-TACG1: For products for small sized project.
CZ-CAPWFC2: Available for all types of VRF and PAC indoor unit.

Connection Diagram



Indoor Unit

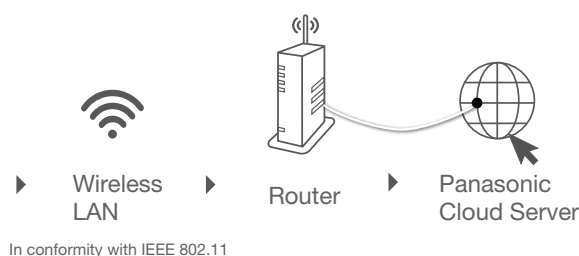

In conformity with IEEE 802.11

WLAN Smart Adaptor Specification

	CZ-TACG1	CZ-CAPWFC2
Input Voltage	DC 12V (Supplied from indoor unit)	
Power Consumption	Maximum 0.66W	Maximum 2.4W
Size [H x W x D]	66 x 36 x 12mm	120 x 70 x 25mm
Weight	Approx. 85g	190g (including communications lines)
Interface	Wireless LAN	
Wireless LAN Standard	IEEE 802.11 b/g/n	IEEE 802.11 b/g/n ; BT5.0 Low Energy (BLE)
Frequency range	2.4GHz band	
Encryption	WPA2-PSK(TKIP/AES)	WPA™ / WPA2™ / WPA3™
Operation range	0-55°C, 20 - 80RH%	



Download on the
App Store

GET IT ON
Google Play

Comfort Cloud

Compatible Device and Browsers

Check on the relative app store for supported OS versions.

*1 CZ-TACG1 or CZ-CAPWFC2 Network Adaptor required per unit.
Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available.
To use Google Assistant to control your air conditioner, you will need an Google Assistant device.
Google is a trademark of Google LLC.
Google Home is compatible with the air conditioning systems shown on pages 4 and 5.
Google functionality is only available with complete air conditioning systems (including Panasonic controllers).
Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.
*2 Function available depending on the model.

Plug & Play for Home Automation

Easily connect with integrated controllers to become part of your automated home network. Plug & Play with Clipsal solutions to enjoy simplicity you've been waiting for, empowering you to take control of your home's technology.



Panasonic

Schneider
Electric


Panasonic partnering with Schneider Electric offering home automation solution with CLIPSAL interfaces and devices.

CLIPSAL
by Schneider Electric

Note: For further information please check CLIPSAL® website.

Easy Design / Plug & Play

Clipsal control solution brings you smart home technologies and enables you to control devices at your fingertips from any smart phone or tablet. Panasonic air conditioners are ready for this smart home automation with just plug-and-play connectivity.

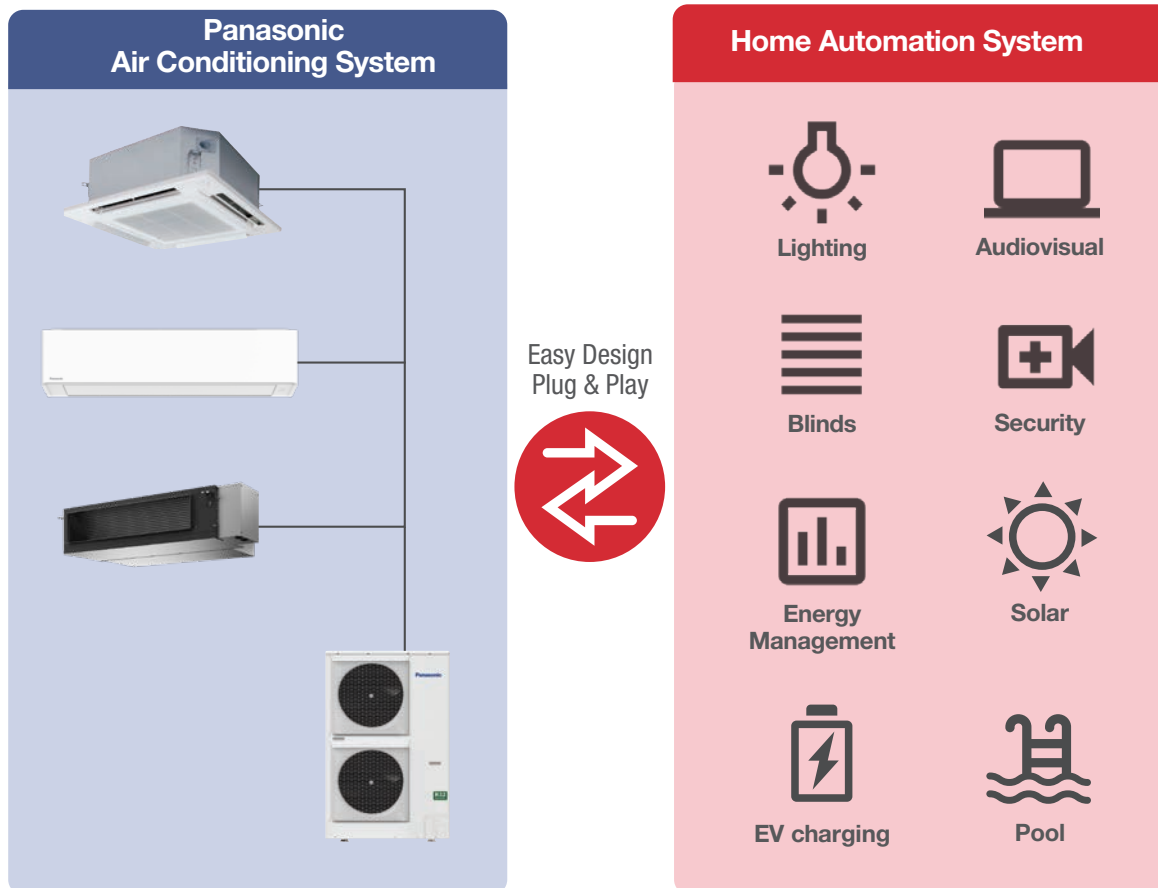

Applies to selected Panasonic Air Conditioning systems only, please consult with Panasonic for more details.

Case Study

Panasonic VRF system was selected for the smart apartments, Lilydale Grove, which integrates robust automation technology to simplify your life. While other air conditioner brands need an adaptor to connect to HEMS, Panasonic can seamlessly connect with Schneider's Home automation, one of the market leaders in the HEMS industry.

- **Air conditioning system** FSV Heat Recovery (20 systems)
FSV Heat Pump (4 systems)
- **Cooling Capacity** 742kW
- **Indoor units** 278 units
- **Control System** SER8150 x 278units



Note: System combination as of July 2020

PAC Smart Connectivity⁺

Through thorough energy management, Panasonic's PAC Smart Connectivity⁺*1 is a completely new, state-of-the-art solution providing energy saving and comfort as well as simple installation, operation and maintenance.



PAC Smart Connectivity⁺

PAC Smart Connectivity⁺ offers efficient energy management and a new air conditioning control solution with high IAQ (Indoor Air Quality).

Energy Management System for Rooms

Each room is monitored by high-precision sensors, making it possible to make every room's temperature comfortable without wasting energy.

Management System for the Entire Building

A Building Energy Management System (BMS) can also be connected for Plug & Play centralised control of the building's entire energy consumption.

Advantages



Dramatic Reduction of OpEx with Outstanding IAQ.

- 3 Built-in sensors: Temperature, RH and Occupancy
- ZigBee wireless sensors: CO₂/Temperature/RH%, window/door, ceiling/wall



User-/Owner-friendly.

- Colour touch screen
- Ease and simply of use
- 22 Languages
- Easy-to-understand error description



Ultimate Customisation.

- Background colour customisable
- Custom display/icons, messages
- Programmable logic (also standalone)
- Various controls and various external connection devices



Easy Design and Plug and Play to Reduce CapEx.

- Simple Plug & Play connection to Building Energy Management System (BMS)
- Stand alone or BMS connected
- Easy Installation of Zigbee Sensors

*1 Not compatible with Ultra Slim Ducted and Floor Console systems.



PAC Smart Connectivity⁺

~New SE8000 series~

1. Quality Air Control

Optimum IAQ is realized using the CO₂ & humidity sensors. The interior remains comfortable, while heating and cooling costs are minimized.

The CO₂ sensor controls ventilation systems which contributes to improving the room's air quality.



2. Room Key Card or Key Cardless Solutions for Hotels

Solutions are provided that meet the needs of various regions and hotel grades.

Whilst the previous model's automatic detection function offered optimal air conditioning with or without a hotel room key card, the latest model enables conventional key cards to control air conditioners and other devices coordinately. The increase in the types of devices that can be connected enables customized control of any hotel room.


3. Other Equipment Control

One room controller manages various devices including lighting and the blinds.

A ventilation system and other external connection devices can be connected by using HRC^{*2} or SE8350 so that various control is possible with this controller alone, even without BMS.


Energy Management System for Rooms

By installing a ceiling motion sensor, wall motion temperature sensor, window/door sensor, and CO₂ sensor in the room, ideal, waste-free air conditioning is achieved.

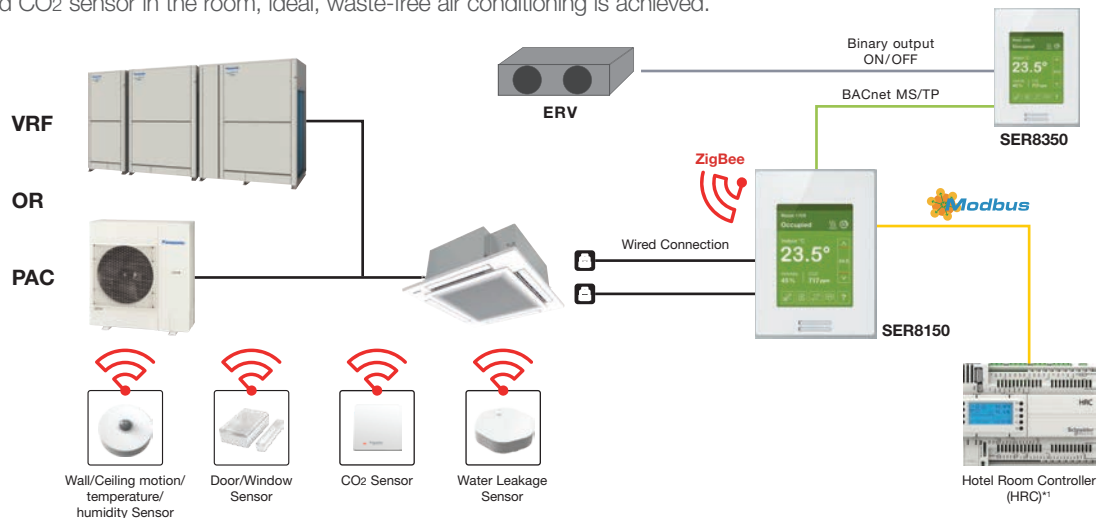


Sensing & Control technology

Using sensors from Schneider Electric, high-quality occupancy control and automatic IAQ control were realised. The sensors detect the presence or absence of occupants, and the opening and closing of doors and windows to achieve the most efficient energy management for exceptional air-conditioned comfort. Flexible installation is possible to match different applications and building features such as walls, ceilings and proximity to doors and windows. No wiring means extra installation versatility.

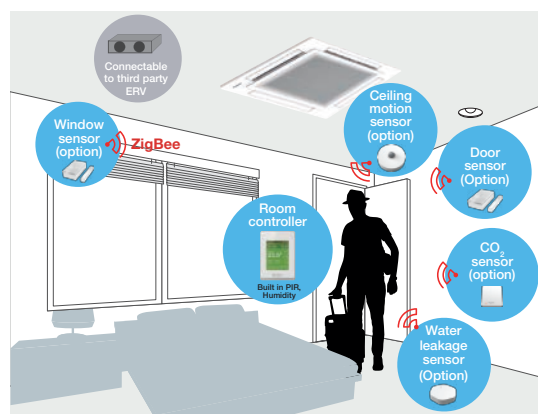

Batteries last for up to five years (10-year battery for CO₂ sensor) and are easy to install and replace.

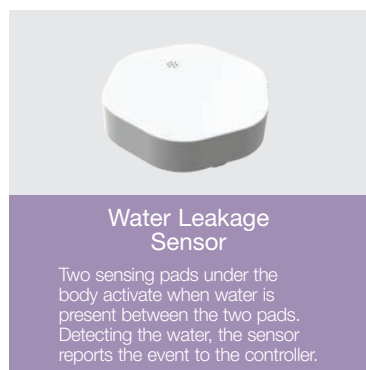


*1 Available through a Schneider Electric distribution channel.

Management System for the Entire Building^{*2}

The smarter solution to simplify energy management,
optimise building efficiency and drive savings.

Plug and Play BMS connection.

With the SER8150, connection to BMS is extremely easy. Better still, a remote controller is all that's needed to enable use as a stand-alone system. In addition to dramatically reducing the burden on system integrators, this cuts costs.

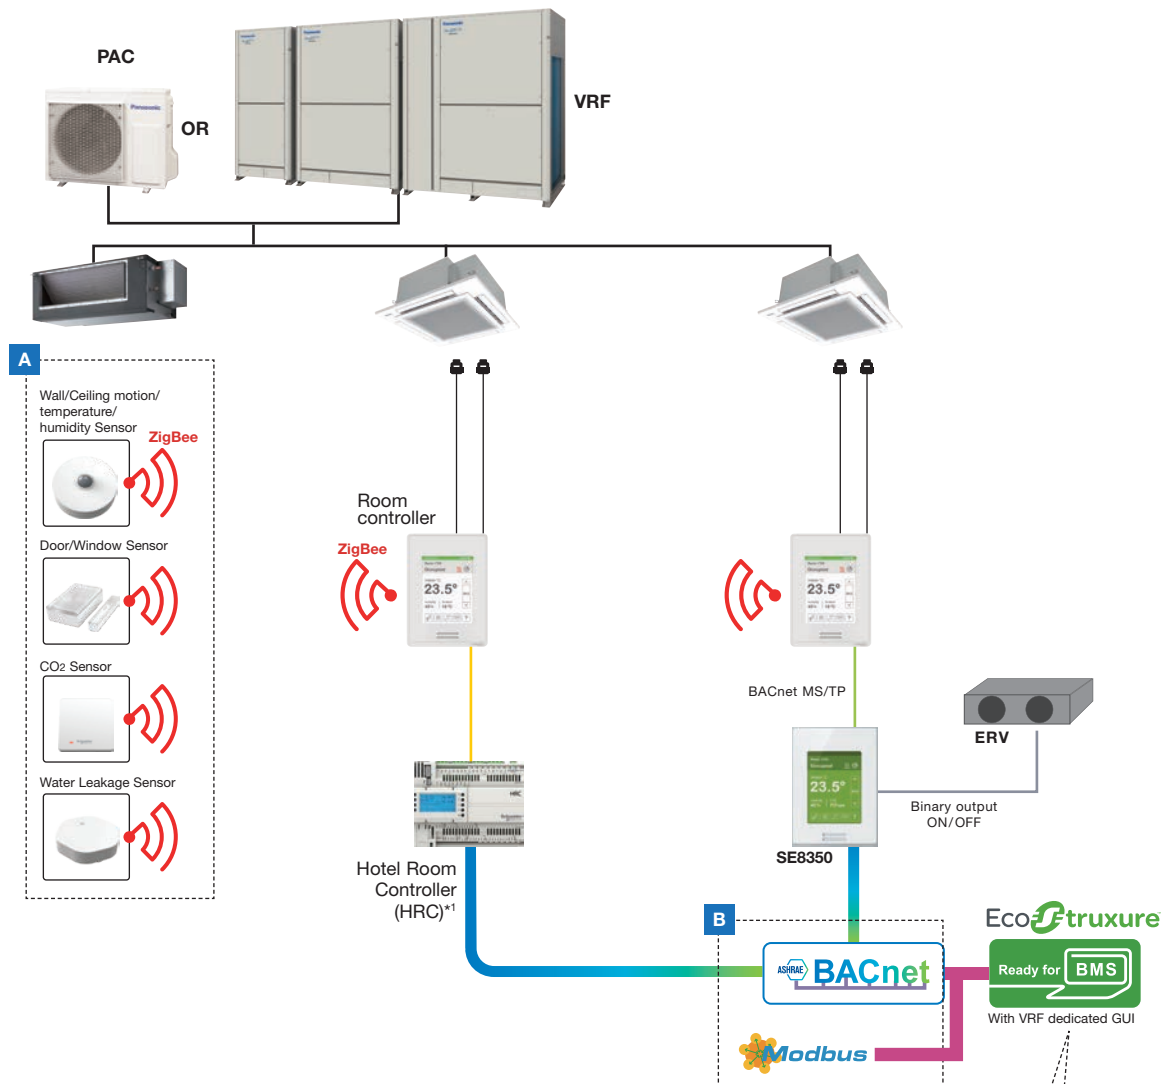

- A** SER8150 smart controller with direct hub to ZigBee® Pro sensors.
Great Occupancy and IAQ control.
Ex: Hotel room occupancy check by PIR sensor, IAQ by CO2 sensor, Door / Window contacts.
- B** BACnet MS/TP or Modbus RTU communication are selectable
- C** For Schneider Electric BMS connection, Panasonic VRF widgets enable easy Plug and Play.
Better understanding for VRF as a chiller system.

-

^{*2} Graphic shows combination of products from Panasonic, Schneider Electric and others. Currently, some products might not available in Australia, please consult authorised dealer for more details.

Smart Management Solutions

1 Hotels

Room Key Card or Key Cardless Solutions for Hotels


The SER8150 and ZigBee Sensor automatic detection function offer optimal air conditioning regardless of whether there is a hotel room key or not. Sensors detect the presence or absence of occupants and the opening and closing of doors and windows for the optimum air-conditioned environment guests expect. Automatic control ensures the most efficient operation when guests are away or when windows are open. This contributes to an appreciable reduction in operation costs.



1. Remote sensing & IAQ control


In addition to detecting a room's temperature, humidity and CO₂ concentration, ZigBee remote sensors detect the opening/closing of windows and doors, and the presence/absence of people in a room.

Various IAQ controls and detailed energy savings are possible by using SE8350 based on this detected information.

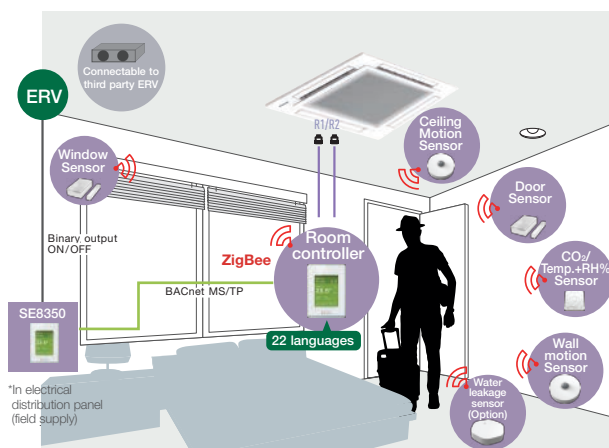


2. BMS connectivity

By setting HRC*1 as the guestroom controller, sensing, control and BMS connection can be realized in coordination with SER8150!

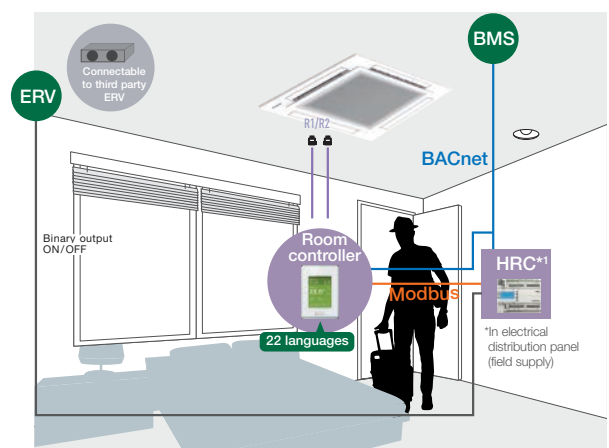


3. Key Cardless control

The introduction of SE8350 and HRC enables conventional wired keycards to be connected to the system so that it is possible to meet the specific requirements of various hotel and room types.

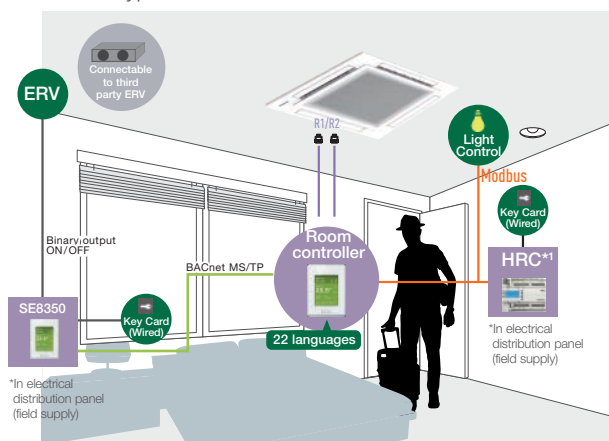

4. Other control

The introduction of SE8350 and HRC enables the on/off control of devices having dry contact input, such as ventilation, lighting and blinds.

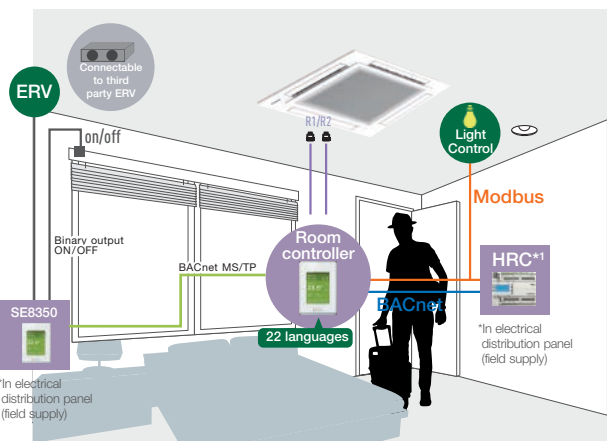

*1 Available through a Schneider Electric distribution channel.

2 Small and Medium Offices



CO₂ sensors (option) and Humidity sensors

CO₂ sensors (option) take measurements in units of ppm, and humidity sensors enable fine air quality control. This creates the most comfortable space for occupants while contributing to improved employee satisfaction.

3 Super Markets



Humidity sensors

Humidity sensors enable automatic dehumidification for the optimum IAQ regardless of climatic conditions. This creates an even more comfortable environment for customers, employees, and products themselves.

Innovative and Unrivalled Advantages

Colour and Design to Match Office Interiors

Colour combinations and design can be set to match different facilities.



Easy-to-Understand Error Description

Error description during an emergency is easy to understand, enabling staff to respond quickly.



Customisation in 22 Languages Possible

The display can be customised to match the native languages of guests to enable smooth, stress-free communication for hospitality at its finest.



Programmable Logic

Full customisation of remote control logic possible, and updating to match conditions.



Smart Connectivity Devices



Door/Window Sensor
SED-WDC-G-5045




Wall/Ceiling motion/temperature/
humidity Sensor
SED-MTH-G-5045



CO₂ Sensor
SED-CO₂-G-5045



Water Leakage Sensor
SED-WLS-G-5045

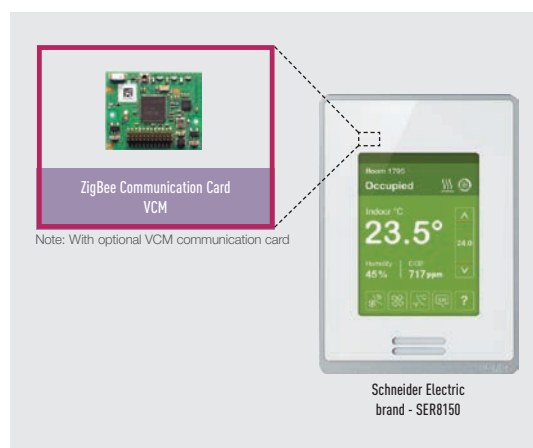

Features

- Up to 5-year battery life batteries included (CO₂ sensor is 10 years)
- Battery level is a point
- Sensor points visible when SER8150 is integrated via BACnet MS/TP
- Sensor status and battery level visible when SER8150 is integrated via ZigBee® Pro

Panasonic AC Smart Cloud

With Panasonic AC Smart Cloud, have your business under control, and start saving!



Flexible and scalable solution

- Energy saving
- Zero downtime
- Site(s) management

Centralise control of your business premises, from wherever you are, 24/7/365.

It doesn't matter how many sites you have, or where they are!

The AC Smart Cloud system from Panasonic allows you to have complete control of all your installations, from your tablet or from your computer.

In a simple click, all your units from several locations, receive status updates in real-time of all your installations, preventing breakdowns and optimising costs.

Flexible solution for your business.




Every time



Everywhere



Multiplatform



Internet browser

Scalable solution for your business.




Small to large



1 to multi sites



Upgrade features*1



PAC / VRF

*1 Customised to meet user demand / Continuous upgrades: new functions and product introductions / IT smart management.


Panasonic AC Smart Cloud offers continuous improvement always thinking about users

New e-CUT function


E-CUT functions are newly available in Panasonic AC Smart Cloud.

5 energy saving settings reduces automatically its energy consumption.


1. Set temperature auto return.
When you want to return to the set temperature after a certain time even if the temperature is changed.

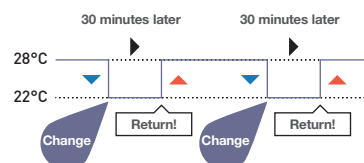


2. Unattended auto shut OFF.
When you want to operate outside of a schedule but to monitor and stop automatically.

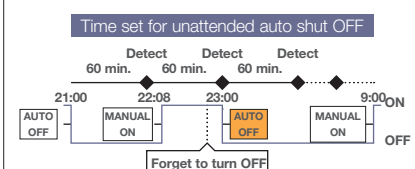


3. Set temperature range limit.
When you want to limit the temperatures that can be set.

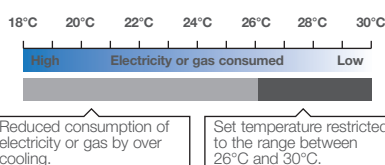

4. Energy saving timer / Efficient operation setting.
Specify time slots when you want operation capacity reduced.



5. Demand / peak shaving settings/ Peak cut settings.
Specify time slots when you want operation capacity of the outdoor units reduced.



Key functions and uniqueness

Multi sites monitoring

- It doesn't matter how many sites you have, easy to manage, operate, compare sites, locations, rooms.



Schedule setting

- Yearly / weekly / holiday timer setting as you want



Powerful statistics for energy savings

- Power consumption, capacity, efficiency level can be compared with different parameters (Yearly / monthly / weekly / daily bases)




Maintenance notification

- Error notification by email and with floor layout
- Maintenance notification of PAC / VRF outdoor units
- Remote service checker function



User customisation*2

Site administrator can create users as desired and assign customised profiles.

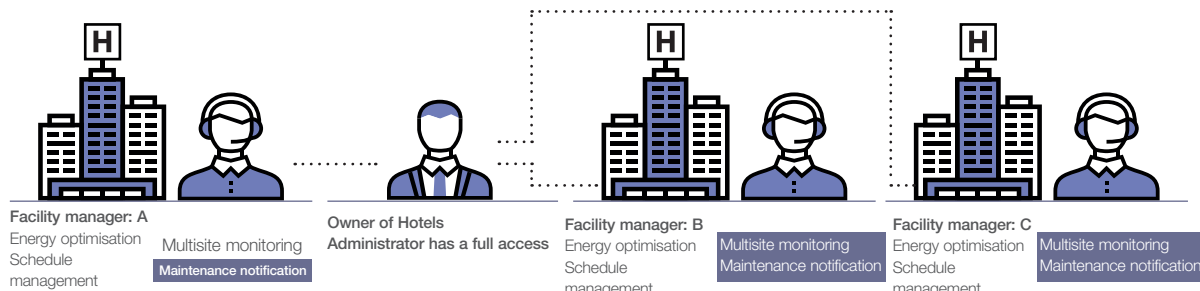

Main functions per user type

Function / Main Tab	Sub-Tab	Basic type (Eg.: Owners, facility managers)	Professional type (Eg.: Installers, maintenance companies)
AC setting	I_U / O_U operation details	✓	✓
	Cloud adapter (CZ-CFUSCC1) details	✓	✓
	AC maintenance	✓	✓
	Map view	✓	✓
Energy saving function	NEW e-CUT	✓	✓
Schedule	Yearly, weekly schedule setting / view	✓	✓
	Power consumption	✓	✓
Powerful statistics	Capacity	✓	✓
	Efficiency ranking	✓	✓

Function / Main Tab	Sub-Tab	Basic type (Eg.: Owners, facility managers)	Professional type (Eg.: Installers, maintenance companies)
Maintenance function	Notification overview / details	✓	✓
	Maintenance settings	✓	✓
	Map view	✓	✓
	Remote service checker	✓	✓
User account *2	New / update user registration	✓	✓
	Distribution group overview / details	✓	✓
System setting	Cut OFF request	✓	✓
	Map editor	✓	✓

*2 Cloud service fee is additionally required. Please contact an authorised Panasonic dealer.

Remote service checker function




Zero down time

- Quick analysis & response
- Time & Cost saving for service maintenance task

Recording service checker parameters from wherever you are!

- Data duration: Maximum 120 minutes
- Data frequency: 10 – 90 seconds
- Mode selection: With test run or Without test run
- Count down schedule setting available

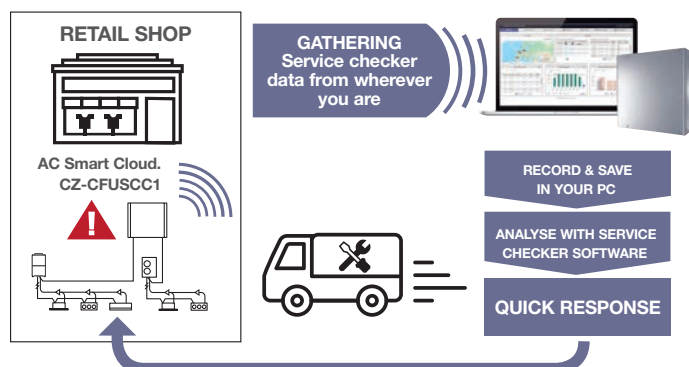

Panasonic AC Smart Cloud parts lists

CZ-CFUSCC1	AC Smart Cloud communication adaptor. Up to 128 groups. 128 units control
------------	---

Note: Please contact an authorized Panasonic dealer.

Controllers

A wide variety of control options to meet the requirements of different applications.

OPERATION SYSTEM	INDIVIDUAL CONTROL SYSTEMS				
Requirements	Simplified high-spec operation	Zone controller for residential	High-spec operation	Normal operation	Operation from anywhere in the room
External appearance					
Type, model name	Simplified high-spec Wired Remote Controller	Zone controller	Deluxe Wired Remote Controller	Timer Remote Controller (Wired)	Wireless Remote Controller
	CZ-RTC6WBL* ¹ CZ-RTC6BL CZ-RTC6WBLW2* ¹ CZ-RTC6BLW2	CZ-RTC6WZ2* ¹ CZ-RTC6Z2	CZ-RTC5B	CZ-RTC4A	Controller: CZ-RWS3 Receiver: CZ-RWRU3 CZ-RWRL3 CZ-RWRD3 CZ-RWRT3 CZ-RWRC3
Built-in thermostat	●	●	●	●	—
nanoe™ X on/off control *not applies to Floor Console	●	●	●	—	●
ECONAVI on/off control	●	—	●	●	●
Number of indoor units which can be controlled	1 group, 8 units	1 Unit	1 group, 8 units	1 group, 8 units	1 group, 8 units
Use limitations	- CZ-RTC6WBL*¹/CZ-RTC6BL : Up to 2 controllers can be connected per group(no combination possible with CZ-RTC6WBLW2*¹/CZ-RTC6BLW2) - CZ-RTC6WBLW2*¹/CZ-RTC6BLW2 :Up to 1 controller can be connected per group	Up to 2 controllers can be connected Main/sub	Up to 2 controllers can be connected per group (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	Up to 2 controllers can be connected per group. (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	Up to 2 controllers can be connected per group.
Function ON/OFF	●	●	●	●	●
Mode setting	●	●	●	●	●
Fan speed setting	●	●	●	●	●
Temperature setting	●	●	●	●	●
Air flow direction	●	—	●	●	● ^{*2}
Permit/Prohibit switching	—	—	—	—	—
Weekly program	● ^{*3}	● Comfort Cloud APP Only.	●	●	—

*1 The above image is a new white model. Black models are also available.

*2 Setting is not possible when a remote controller unit is present (use the remote controller for setting).

*3 CZ-RTC6WBL*¹ or CZ-RTC6BL with H&C Control App, CZ-RTC6WBLW2*¹ or CZ-RTC6BLW2 with H&C Control App or Comfort Cloud App.

Next Generation Control Solutions



Comfort Cloud



Smart Cloud Control



BMS Plug & Play

Note: Additional accessories or devices are required. Please consult Panasonic for details.

CENTRALISED CONTROL SYSTEMS				SMART CONTROL SYSTEMS	
Operation with various function from centre station	Only ON/OFF operation from centre station	Simplified load distribution ratio (LDR) for each tenant Touch screen panel	Connection with 3rd Party Controller	Cloud connectivity, operation from anywhere	Schneider Electric room controller
			Seri-Para I/O unit for outdoor unit 		
System Controller	ON/OFF Controller	Intelligent Controller	CZ-CAPDC2	WLAN Smart Adaptor Comfort Cloud App	PAC smart connectivity+
CZ-64ESMC3	CZ-ANC3	CZ-256ESMC3 (CZ-CFUNC2)	Interface adaptor 	CZ-TACG1 / CZ-CAPWFC2	SER8150 (room controller)
—	—	—	CZ-CAPC4	—	●
—	—	—	Seri-Para I/O unit for each indoor unit 	●	—
●	—	●	Communication Adaptor 	●	—
64 groups, max. 64 units	16 groups, max. 64 units	64 units x 4 links, max. 256 units	LonWorks Interface 	1 adaptor : 1 group, 8 units. Multiple adaptors for each indoor units : 200 units (10 location x 20 units)	1 group, 8 units
- Up to 10 controllers, can be connected to one system. - Main unit/sub unit (1 main unit + 1 sub unit) connection is possible. - Use without remote controller is possible.	- Up to 8 controllers (4 main units + 4 sub units) can be connected to one system. - Use without remote controller is impossible.	A communication adaptor (CZ-CFUNC2) must be installed for three or more links.	CZ-CAPBC2	- Mobile device, free App and internet router is required separately. - Wired remote controller (master) required.	- Comparing to RTC5B, up to 1 controller can be connected per IDU. - Wired to R1/R2. - VRF and PAC(S-link) model only.
●	●	●	CZ-CFUNC2	●	●
●	—	●	LonWorks Interface	●	●
●	—	●	CZ-CLNC2	●	●
●	—	●		●	●
●	—	●		●	●
●	—	●		●	●
●*2	—	●*2		●	●
●	●	●		—	—
●	—	●		●	—

Note: Product images not to scale.

New wired RC & Monitor adaptor & App compatibility ^{*1}

^{*1} End User App Recommendation
CZ-RTC6WBL^{*2} - H&C Control App
CZ-RTC6WBLW2^{*3} - Comfort Cloud App

			Wired RC BLUETOOTH  CZ-RTC6WBL ^{*2} 	Wired RC BLUETOOTH & WLAN  CZ-RTC6WBLW2 ^{*3}  	WLAN adaptor  CZ-CAPWFC2 	Monitor adaptor for diagnosis  New service checker 
PZH2 / PZ2 series				×	 	×
NX series	PZ4 Series ODU × NX series IDU		  	   	 	 
	PZH2 / PZ2 series ODU × NX series IDU		 	  	 	×

^{*2} A black model (CZ-RTC6BL) is also available.

^{*3} A black model (CZ-RTC6BLW2) is also available.

Note: Power supply is available only when using NX IDU

^{*4} New Zone controller (CZ-RTC6WZ2^{*5}) can be connected with 3.6 kW to 22.4 kW Ducted (PF3 and PE4) Indoors and VRF Ducted (M1, E1, E2, E1R, F2, F3 and Z1) Indoors.

^{*5} A black model (CZ-RTC6Z2) is also available.

^{*6} Connectable to selected Panasonic ducted models only, please consult Panasonic for more details

Timer remote controller (CZ-RTC4A)



Dimensions
H 120 x W 120 x D 20 mm

Basic remote controller ON/OFF

- Operation mode changeover (Cooling, Heating, Dry, Auto, Fan).
- Temperature setting (Cooling / Dry: 18-30 °C Heating: 16-30 °C).
- Fan speed setting H / M / L and Auto.
- Air flow direction adjustment.
- ECONAVI on / off^{*7}

Time Function 24 hours real time clock

- Day of the week indicator.

Weekly Programme Function

- A maximum of 6 settings/day and 42 settings/week can be programmed.

Outing Function

- This function can prevent the room temperature from dropping or rising when the occupants are out for a long time.

Sleeping Function

- This function controls the room temperature for comfortable sleeping.

Maximum 8 indoor units can be controlled from one remote controller

Remote control by main remote controller and sub controller is possible

Maximum 2 remote controllers (main remote controller and sub controller) can be installed for one indoor unit.

^{*7} Depending on the model, some menus cannot be used.

Note: Product images not to scale.

Wireless remote controller



For 4-WAY
Cassette type
CZ-RWS3
+CZ-RWRU3

Remote control by main remote controller and sub controller is possible

- Maximum 2 remote controllers (main remote controller and sub controller) can be installed for one indoor unit.

When CZ-RWS3+CZ-RWRC3 is used, wireless control becomes possible for all indoor units

- When a separate receiver is set up in a different room, control from that room also becomes possible.
- Automatic operation by means of the emergency operation button is possible even when the remote controller has been lost or the batteries have been exhausted.



For all Ducted types
CZ-RWS3
+CZ-RWRC3

In addition, there are other functions such as temperature setting, operation switching, wind direction/fan speed setting, etc

Ventilation independent operation is possible

When commercial ventilation fans or heat-exchange ventilation fans have been installed, they can be operated with this remote control (interlocked operation with the indoor unit or independent ventilation ON/OFF).



For Under Ceiling type
CZ-RWS3
+CZ-RWRT3


T10 Terminal for External Control (Digital Connection)

Connecting an indoor unit to an external device is easy.
The T10 Terminal featured in the electronic circuit board of all indoor units enables digital connection to external devices.




1. T10 Terminal Specification (T10:CN061 at indoor unit PCB)

- **Control items:**
 1. Start/stop input
 2. Remote controller prohibit input
 3. Start signal output
 4. Alarm signal output

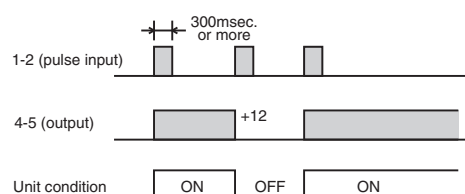

NOTE: The wire length from indoor unit to the Relay must be within 2.0m.
Pulse signal changeable to static with JP cutting. (Refer to JP001)

• Example of wiring



Condition

1. 1-2 (Pulse input): Unit ON/OFF condition switching with a pulse signal. (1 pulse signal: shortage status more than 300msec. or more)
2. 2-3 (Static input): Open/ Operation with Remote is permitted. (Normal condition) Close/ Remote controller is prohibited.
3. 4-5 (Static output): 12V output during the unit ON. / No output at OFF.
4. 5-6 (Static output): 12V output when some errors occur / No output at normal.


2. Usage Example

Forced OFF control

• Condition

1-2 (Static input): Close/ Operation with Remote is permitted. (Normal condition) Open/ Unit is forcibly OFF and Remote controller operation is prohibited.

• Example of wiring

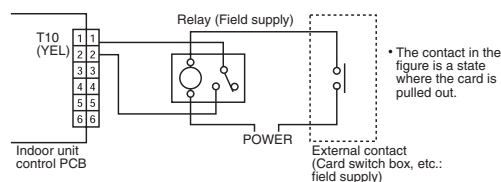


Note: The wire length from indoor unit to the Relay must be within 2.0m

Operation ON/OFF signal output

• Condition

4-5 (Static output): 12V output during the unit ON / No output at OFF

• Example of wiring

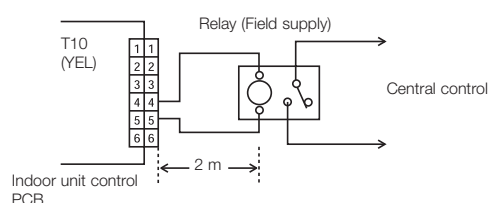

Note: The wire length from indoor unit to the Relay must be within 2.0m
Pulse signal changeable to static with JP cutting. (Refer to JP001)

[illegible]

How HRV makes it easy and affordable



Choosing, buying and owning an HRV product should be a breeze – so we've worked hard to make sure it is!

For a drier, warmer, healthier home

PROFESSIONAL INSTALLATION

Your HRV installation team is trained to give you a smooth installation experience and a tidy finished result.

EXPERT SERVICING

Your HRV product is designed to give you many years of trouble-free operation. Regular servicing is key to that, so we stand by and service everything we sell.



REFER A FRIEND

Refer a new customer to HRV and get \$200 cash! Plus your friend will get a \$200 discount!*

*Terms and conditions apply. Eligible on a HRV ventilation system, ducted heat pump or a HRV hot water heat pump purchase.

CUSTOMER CARE ON CALL

Just call 0800 478 123 to connect with one of our super-friendly, experienced team. They love to help!

GET PEACE OF MIND WITH HRV

We take your trust seriously. So, everything we sell and install at HRV is backed by a comprehensive warranty (5 years for our HRV ventilation systems and accessories). If anything goes wrong during the warranty period, get in touch and we'll take care of it. Visit hrv.co.nz/warranty for more information.

PAYMENT OPTIONS AVAILABLE

HRV offer payment options with Q Card and Gem Interest Free to transform your home health. Visit hrv.co.nz/finance to find out more.



LONG TERM
FINANCE

gem

Interest
Free

YOUR IN-HOME EXPERT

NAME

PHONE



HRV.CO.NZ

0800 478 123